


Refrigeration Pressure gauge

Type A10 - Front Line

Date: September 2002

Sheet No.:1-40gb

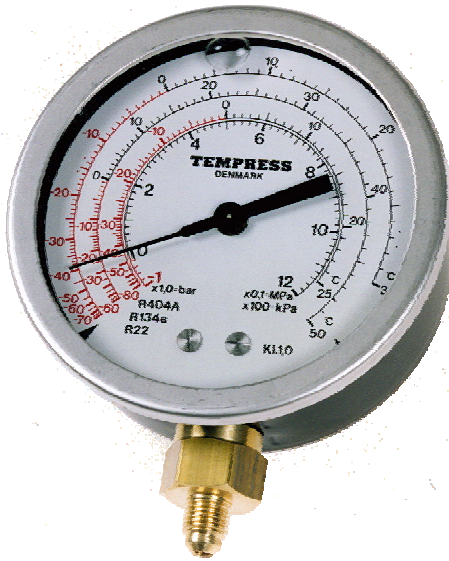

Refrigeration pressure gauge

- Liquid filled
- Connection: bottom or rear
- Direct, wall or panel mounting
- More than 40 different connecting threads
- Long-term stable
- Vibration protected
- Many types of refrigeration scales, graded in pressure and temperature

Application

This series of pressure gauges is well suited for application in the refrigeration industry.

Module System

The TEMPRESS program of connecting nipples and mounting auxiliaries makes it possible to deliver thread type and mounting form as required.

The program of refrigeration scales cover most refrigeration media available on the market. The scale can be delivered with 1, 2 or 3 refrigeration media.

Temperature Compensation

The unique system for temperature compensation ensures a correct reading even under heavily fluctuating ambient temperatures (0-60°C)

Safety

The temperature compensation system simultaneously works as blasting protection, i.e. if the measuring system blasts due to overpressure, the temperature compensation is blown out from the back of the instrument.

Approved by DNV (Det Norske Veritas).

Specifications

| | |
|---|--|
| Pressure Gauges: | DN 63 type A1001 DN 80 type A1002 DN 100 type A1003 DN 160 type A1004 |
| Case material: <i>Option:</i> Glass face: Bezel: | Steel, black enamelled AISI 316 Acrylic AISI 316 |
| Liquid filling | Glycerine |
| Connection: | Brass, steel or AISI 316 |
| Measuring system: | Brass/bronze, steel or AISI 316 |
| Range: | -1-0+12 bar -1-0+25 bar Other ranges on request |
| Accuracy: | Cl. 1.0 (± 1% FS) |
| Refrigeration media: | R22, R134a, R404, R507, Ammonia (R717) Other media on request |

TEMPRESS reserves the right to changes without notice

Agent/Dealer:



TEMPRESS A/S

Nordlandsvej 64-66
DK-8240 Risskov, Denmark
Tel.: +45 8932 5210
Fax.: +45 8932 5213
sales@tempress.dk
www.tempress.dk