

Vakaros Atlas 2 Installation Guide

This is a helpful guide to help owners and boat captains in the installation of the Vakaros unit

Class Rule C.5.5 (c)

(i) Boats shall have a Vakaros Atlas 2 installed on the deck according to the supplier's instructions and any other provisions in the Notice of Race and/or Sailing Instructions.

(ii) The Vakaros unit above shall have a Mad mount bracket installed on the deck to protect it.


(i) The aft edge of the bracket shall be 4440mm from the forward edge of the load cell pin on the forestay.

(ii) The starboard edge of the bracket shall be 100mm from the inside jammer.

(iii) The bracket and Vakaros unit shall be protected by the accompanying shell provided by MadMounts.”



The aft edge of the bracket shall be 4440mm from the forward edge of the load cell pin on the forestay.

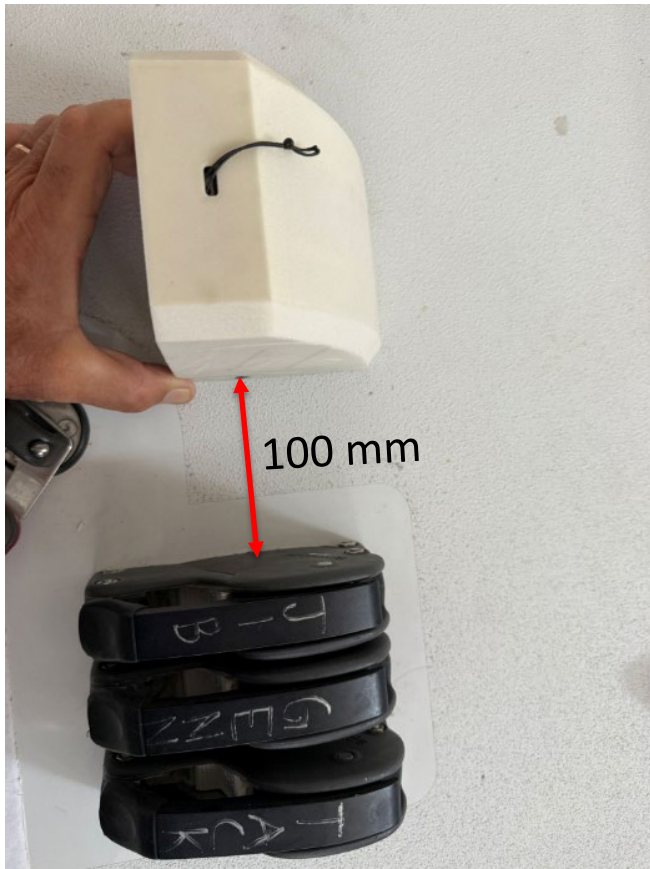

The starboard edge of the bracket shall be 100mm from the inside jammer.