

# Kawasaki Z900 RS Tail Tidy


Kit Contents PRN013913

A 1 x Reflector Kit

- B 2 x Grommets
- © 2 x Indicator Mounts
- ③ 3 x P-Clips
- E 4 x M6 Flange Nuts
- © 11 x M4 x 8 Black Button Heads







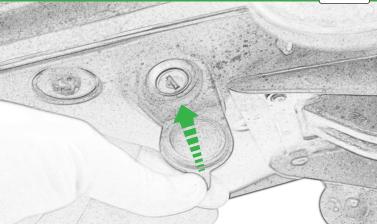



a de la companya de la compa




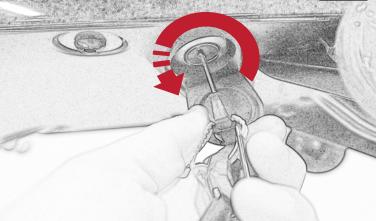


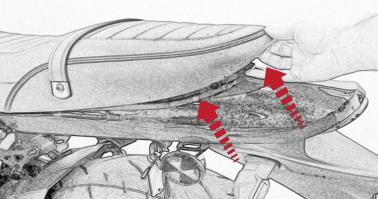


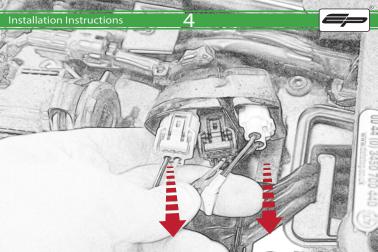

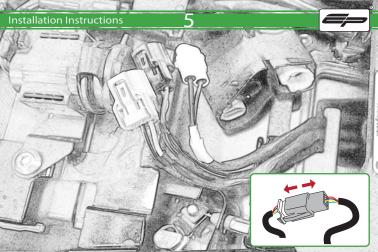

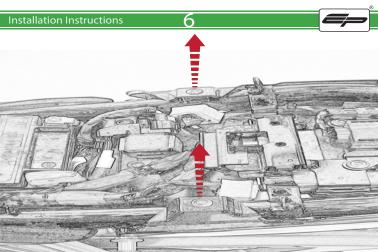

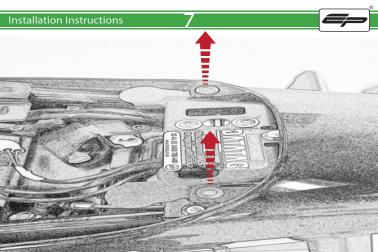

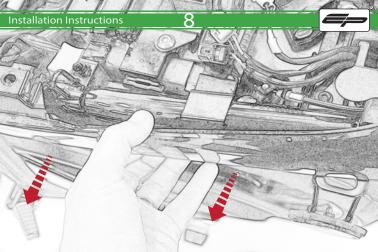












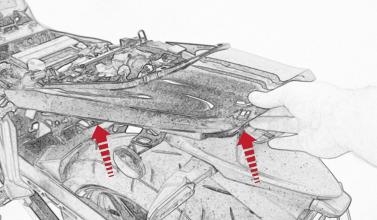





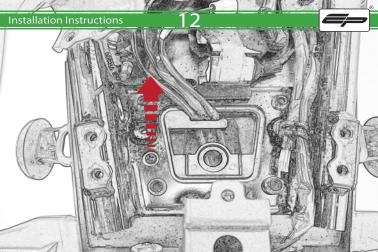


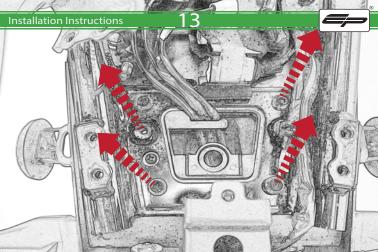



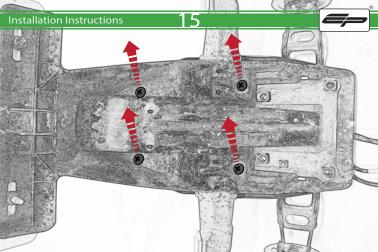

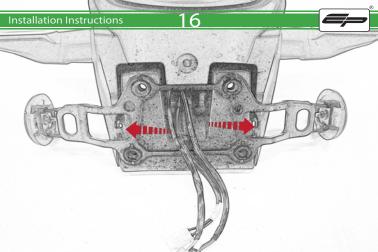

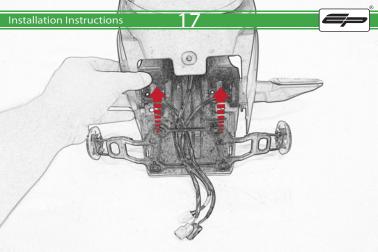













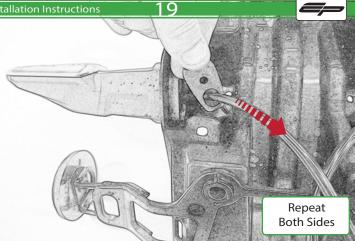

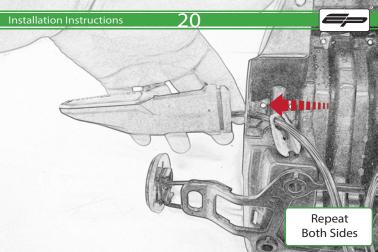




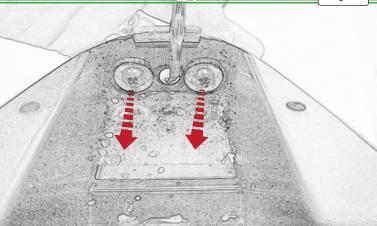

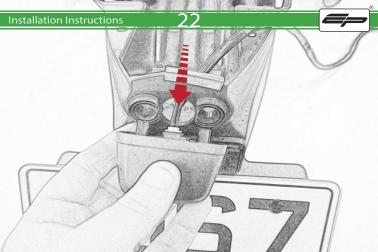




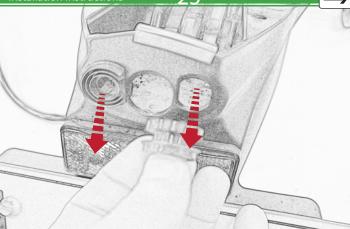



2

# 24 NIN STATE



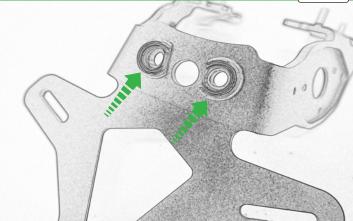


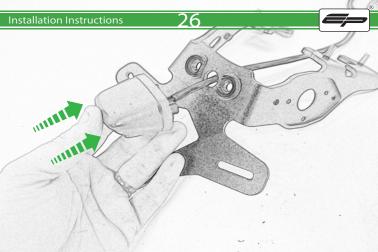


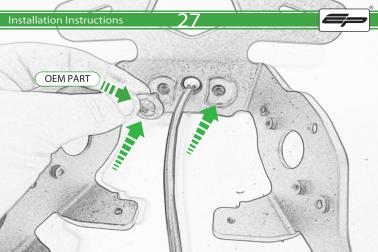





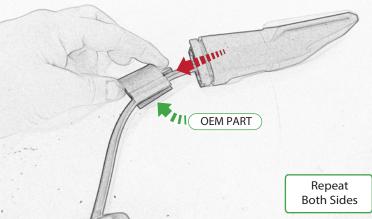

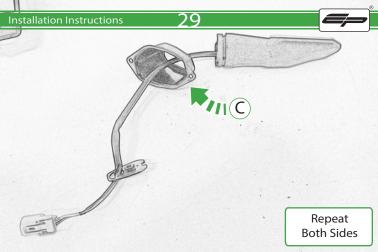



OEM PART


111










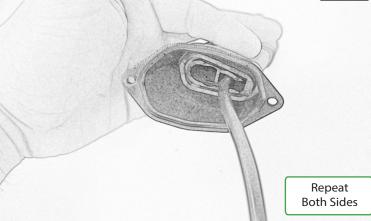







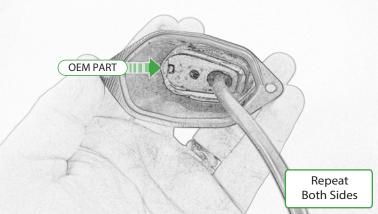





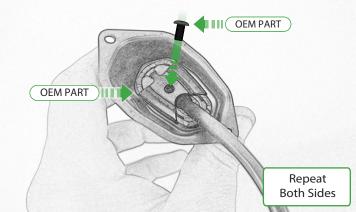


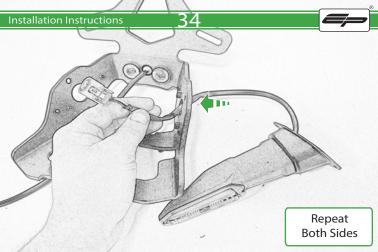








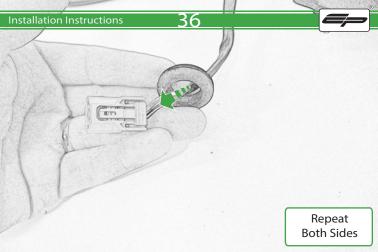







В

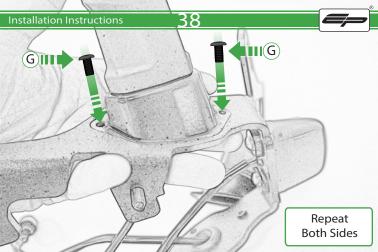


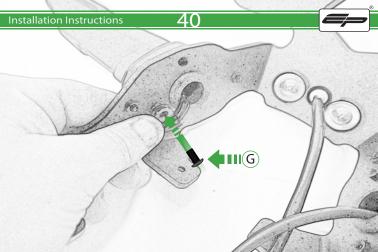






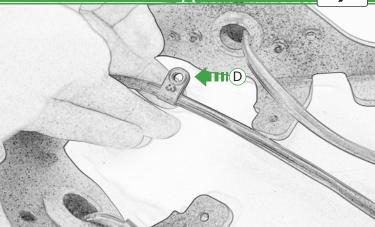

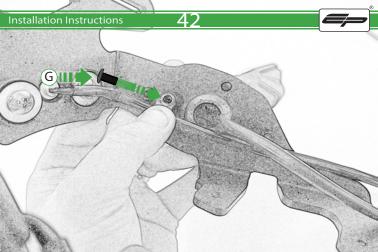

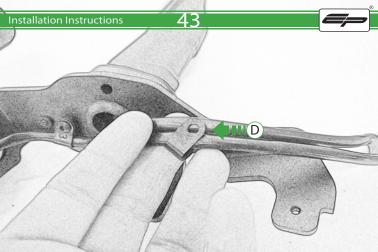




80









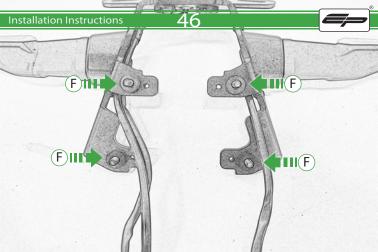






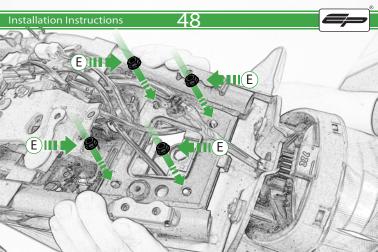






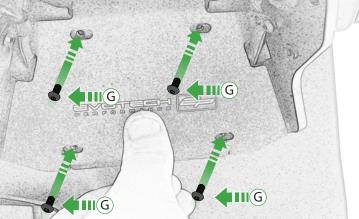






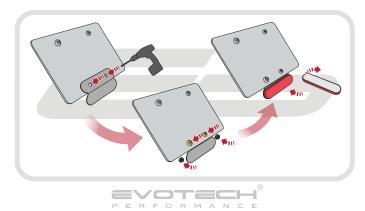



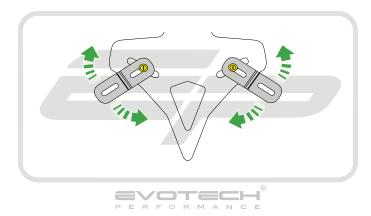



# 

After installation of your tail tidy ensure that the licence plate does not contact the rear tyre when suspension is fully compressed. Ensure all electrics including indicators, tail light, brake light and licence plate light lights are working correctly before riding the motorcycle. It is recommended that periodic inspections are made to ensure that all fixings are fully tightend.





www.evotech-performance.com