



Application

The Apollo LED is a suspended fitting which uses LED technology to produce direct and indirect illuminance to create an environment in line with CIBSE LG7.

- Offices
- Reception Areas
- Libraries
- Schools

Body

Formed from extruded aluminium for an aesthetically pleasing finish can be powder coated to any RAL colour. The downward light aspect is controlled via a high output diffuser and high output Tridonic boards giving a very high L.O.R. Indirect light is controlled via Tridonic LED tape via a high output diffuser giving a uniform output.

Sizes (nominal)

Available in:

- 1200mm

Other sizes can be manufactured, as specials to order. Can be continuously mounted with infill panels to any size if required.

Control Gear

Standard LED

Options Available

- Dimming: DALI/DSI
- Integral, Self Test or EM PRO Emergency
- Wire Suspension
- Rod Suspension
- Standalone
- Continuous
- Infill's

Attachments

An Inbuilt Sensor unit gives this luminaire an intelligence of its own.

When linked with the Digital Control Systems, the luminaire can offer PIR Presence detection automatic switch on / off.


Controlled Daylight Sensing/ dimming to create a constant working illuminance.

Lamps

All luminaires are supplied with colour 840, 4000k LED's as standard.

Options are available from 3000k to 5000k.

All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius

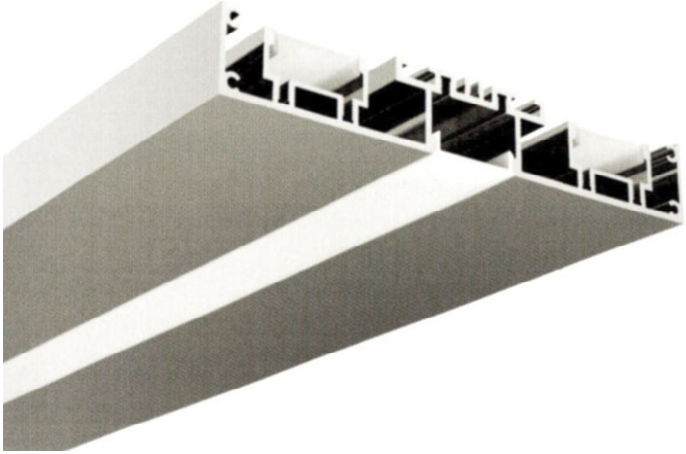

Catalogue Codes

| Wattage | Length | Width | Depth | Cat No. |
|---------|--------|-------|-------|--------------------------|
| 37.4 W | 1210mm | 150mm | 24mm | SL/LED/12/5520/APL/250mA |
| 45 W | 1210mm | 150mm | 24mm | SL/LED/12/6480/APL/300mA |
| 52.6 W | 1210mm | 150mm | 24mm | SL/LED/12/7360/APL/350mA |

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.