



Application

Where small decorative state of the art downlighters are required our Eros Blacklight LED offers exceptional performance and an IP44 rating as standard where a decorative appearance is required.

Ideal for:

- Offices
- Receptions
- Circulation Area
- Toilets

Body

Die-cast aluminium body and a moulded poly-carbonate reflector.

Sizes

(nominal) Available in
(mm): Cutout: 81mm
Length x Width: 85 x 85mm
Depth: 105mm

Control Gear

Standard

Options Available


- DALI Dimming
- Different colour temperatures.
- Available in a square or round design.
- Plaster-in Bezel
- DSI
- 0-10V Analogue

Attachments

- Different Lense Options

Lamps

Using the Samsung LEDs we achieve outstanding efficiency values, up to 105 lm/w and a rated life of 50000 hours. Our optimized slim thermal management system ensures quality is maintained.

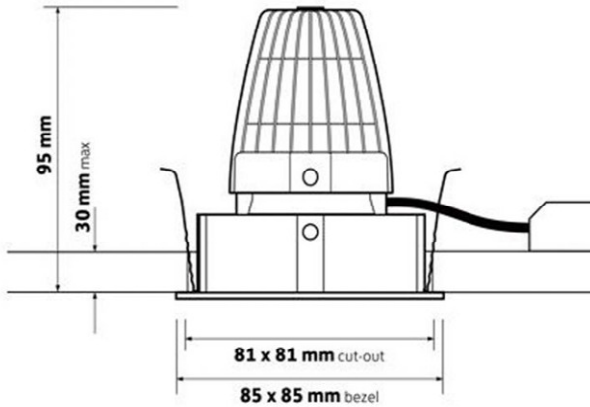

Catalogue Codes

Wattage	Cut-out Size	Length	Width	Depth	Cat No.
5.75 W	81 mm	85 mm	85 mm	105 mm	SL/LED/650/EROS/SQ/BKR
11.4 W	81 mm	85 mm	85 mm	105 mm	SL/LED/1200/EROS/SQ/BKR

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.