



Application

The Executive LED is an IP44 Recessed fully boxed luminaire utilising LED technology. This stylish fitting is designed to fit into exposed Tee type ceilings and MF ceilings.

Ideal for:

- Commercial Environments.

Body

Formed from one piece, 1mm bright steel and finished in high gloss electrostatic white powder coating.

Sizes (nominal)

Length: 600/1200/1500 mm

Width: 300/600 mm

Depth: 78 mm

Other sizes may be ordered as specials.

Control Gear

- Standard LED
- DALI Dimmable LED
- DSI Dimmable LED

Options Available

- Add /EMG to codes for Emergency Mode
- Add /EMG/ST to codes for Self Test Emergency
- Add /EMG/AD to codes for Addressable Emergency

Attachments


- Add /PIR to codes for Inbuilt PIR

LED Boards

All Luminaires are supplied with colour 840, 4000k LED's as standard. Options are available from 3000k to 5000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius.

Main Attributes

- Up to 136lm/watt
- 50,000 Hour Life
- High Colour Rendering
- Self Cooling
- 5 Year Guarantee

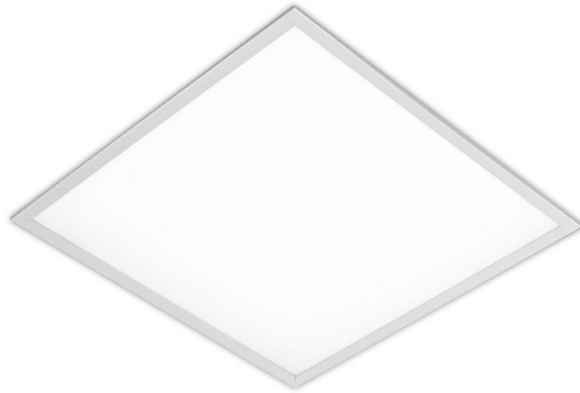

Catalogue Codes

Modular Size	Lamp Rating	Length	Width	Depth	Catalogue Codes
600 x 300	2 x 9.8 w	595mm	295mm	78mm	SL/LED/6.3/2560/XX/MP/LO
600 x 600	4 x 9.8 w	595mm	595mm	78mm	SL/LED/6.6/5120/XX/MP/LO
1200 x 300	4 x 9.8 w	1195mm	295mm	78mm	SL/LED/12.3/5120/XX/MP/LO
1200 x 600	8 x 9.8 w	1195mm	595mm	78mm	SL/LED/12.6/10240/XX/MP/LO
1500 x 300	5 x 9.8 w	1495mm	295mm	78mm	SL/LED/15.3/6400/XX/MP/LO
600 x 300	2 x 11.6 w	595mm	295mm	78mm	SL/LED/6.3/2940/XX/MP/HO
600 x 600	4 x 11.6 w	595mm	595mm	78mm	SL/LED/6.6/5880/XX/MP/HO
1200 x 300	4 x 11.6 w	1195mm	295mm	78mm	SL/LED/12.3/5880/XX/MP/HO
1200 x 600	8 x 11.6 w	1195mm	595mm	78mm	SL/LED/12.6/11760/XX/MP/HO
1500 x 300	5 x 11.6 w	1495mm	295mm	78mm	SL/LED/15.3/7350/XX/MP/HO
750 x 750	4 x 9.8 w	750mm	750mm	78mm	SL/LED/750/5120/XXP/MP/LO
750 x 750	4 x 11.6 w	750mm	750mm	78mm	SL/LED/750/5880/XXP/MP/HO

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.