



Application

The Executive LED is an IP44 recessed fully boxed luminaire utilising LED technology. This stylish fitting is designed to fit into exposed Tee type ceilings.

Ideal for:

- Commercial Environments
- Car Dealerships
- Double Height Areas

Body

Formed from one piece, 1 mm bright steel, finished in high gloss electrostatic white powder coating.

Sizes

(nominal) Length:
1200/1500 mm Width:
600 mm
Depth: 70 mm

Control Gear

- Standard LED
- DALI Dimming LED
- DSI Dimming LED

Options Available

Add /EMG to codes for Emergency
Add /EMG/ST to codes for Self-Test Emergency
Add /EMG/AD to codes for Addressable Emergency
Add /DALI to codes for DALI Dimming
Add /DSI to codes for DSI Dimming

Attachments


Add /PIR to codes for Inbuilt PIR

LED Boards

All luminaires are supplied with colour 840, 4000k LEDs as standard. Options are available from 3000k to 5000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius.

Main Attributes

- Up to 150lm/watt
- 50,000 Hour Life
- High Colour Rendering
- Self Cooling
- 5 Year Guarantee
- CRI > 80

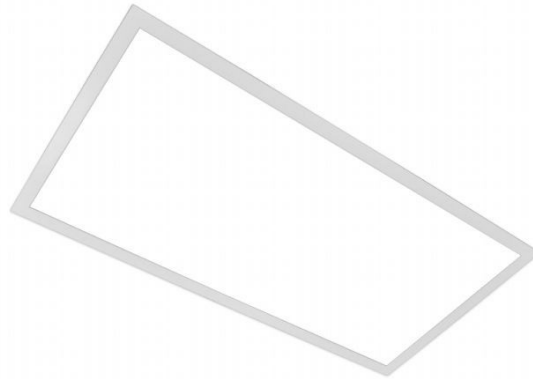

Catalogue Codes

Wattage	Lumens	Length	Width	Depth	Catalogue Code
141.6 W	21051 lm	1200 mm	600 mm	70 mm	SL/LED/12.6/20320/XXP
170.4 W	24698 lm	1200 mm	600 mm	70 mm	SL/LED/12.6/23840/XXP
198.4 W	28096 lm	1200 mm	600 mm	70 mm	SL/LED/12.6/27120/XXP
180.9 W	26289 lm	1500 mm	600 mm	70 mm	SL/LED/15.6/25400/XXP
216.9 W	30801 lm	1500 mm	600 mm	70 mm	SL/LED/15.6/29760/XXP
252.1 W	35065 lm	1500 mm	600 mm	70 mm	SL/LED/15.6/33880/XXP

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.