



### Application

Where state of the art up-lighters are required our Libra LED offers exceptional performance. This fitting can be used both for interior and exterior applications due to its IP68 rating.

Ideal for:

- Stair Treads
- Corridors
- Shopping Malls
- Car Parks

### Body

Nickel-plated aluminium or AISI 316L stainless steel luminaire with silicone rubber gaskets for IP68. Polymethyl methacrylate diffuser.

### Sizes (nominal)

Diameter: 55 mm  
Depth: 100 mm

### Control Gear

- Standard LED
- DALI Dimmable LED
- DSI Dimmable LED

### Options Available

Add /EMG to codes for Emergency Mode  
Add /EMG/ST to codes for Self Test Emergency  
Add /EMG/AD to codes for Addressable Emergency  
Add /DALI to codes for DALI Dimming  
Add /DSI to codes for DSI Dimming

### Attachments


Add /PIR to codes for Inbuilt PIR  
Add /GC to codes for Stainless Steel Ground Casing

### LED Boards

All luminaires are supplied with colour 840, 4000k LED's as standard. Options are available from 3000k to 5000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius.

### Main Attributes

- 100lm/watt
- 50,000 Hour Life
- High Colour Rendering
- Self Cooling
- CRI > 80
- 5 Year Guarantee

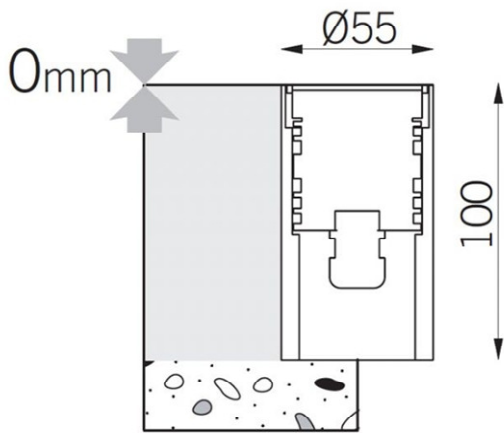

### Catalogue Codes

Wattage	Diameter	Depth	Catalogue Code
1.5 W	55 mm	100 mm	SL/LED/230/LIB/IU/IP68

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.