



Application

The Lynx LED is designed for the hostile environment where a tough, no nonsense IP65 fitting is required.

Ideal for:

- Security Lighting
- Building Perimeters
- Car Parks

Body

Die-cast aluminium with cooling fins. A tempered glass, 4 mm thick diffuser means the fitting is resistant to thermal shock and impacts. IP65 Rating. Complete with galvanised and coated bracket.

Sizes (nominal)

Available in:

- 428 mm x 294 mm x 65mm

Control Gear

Standard

Options Available


- Graphite Coloured Body
- Silver Coloured Body

Lamps

All luminaires are supplied with colour 840, 4000k LED's as standard. Options are available from 3000k to 7000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius

Weight & Windage

- 86W 4.9kg 0.18m²

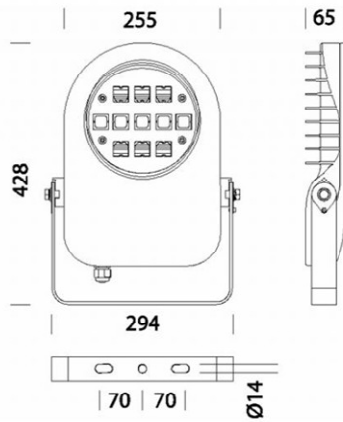

Catalogue Codes

Wattage	Length	Width	Depth	Cat No.
86 W	428 mm	294 mm	65 mm	SL/LED/11880/LYNX

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.