



Application

A slim, stylish luminaire with a curved profile which complies with D.H.S.S. recommendations for lighting of general areas. Resisting dust and insects, it enjoys an IP44 protection rating thus reducing maintenance costs. The diffuser and end caps are manufactured in poly-carbonate with tamper proof screws for added security.

Ideal for:

- School Corridors
- Health Care Buildings

Body

Formed from 1.0mm bright steel and finished in a high gloss electrostatic powder coat. A high output micro-prism diffuser is used to maintain the High Output of the LEDs.

Sizes (nominal)

Length: 663 mm/1210 mm/1510 mm
Width: 205 mm
Depth: 65 mm

Control Gear

- Standard LED
- DALI Dimming LED
- DSI Dimming LED

Options Available

Add /EMG to codes for Emergency
Add /EMG/ST to codes for Self-Test Emergency
Add /EMG/AD to codes for Addressable Emergency
Add /DALI to codes for DALI Dimming
Add /DSI to codes for DSI Dimming

Attachments


Add /PIR to codes for Inbuilt PIR

LED Boards

All Luminaires are supplied with colour 840, 4000k LED'S as standard. Options are available from 3000k to 5000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius.

Main Attributes

- Up to 136lm/watt
- 50,000 Hour Life
- High Colour Rendering
- Self Cooling
- 5 Year Guarantee
- CRI > 80

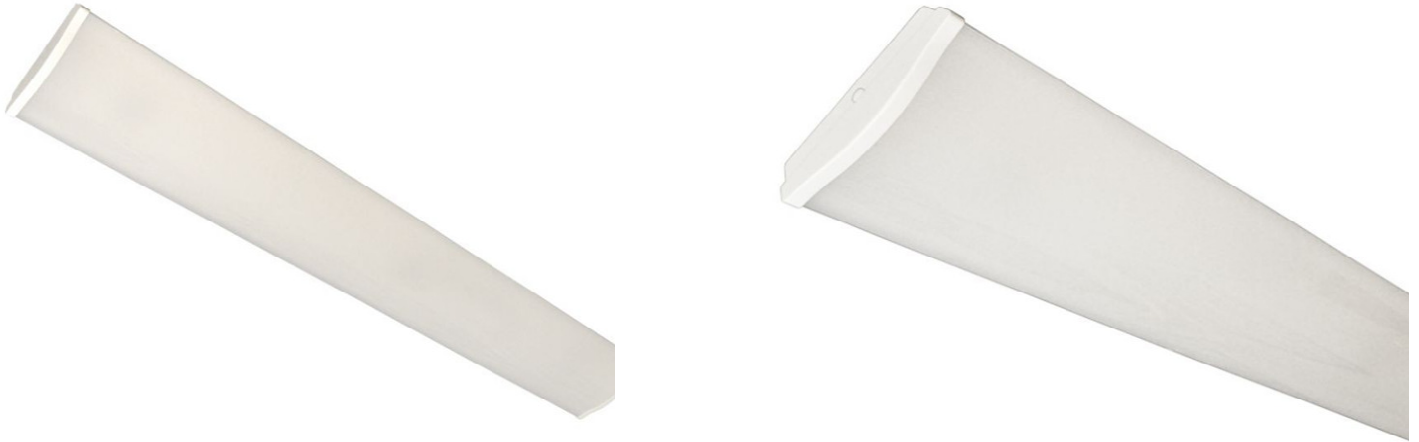

Catalogue Codes

Wattage	Length	Width	Depth	Catalogue Code
19.7 W	663 mm	205 mm	65 mm	SL/LED/6/2490/MC/MKII
23.2 W	663 mm	205 mm	65 mm	SL/LED/6/2980/MC/MKII
26.8 W	663 mm	205 mm	65 mm	SL/LED/6/3480/MC/MKII
20.5 W	1210 mm	205 mm	65 mm	SL/LED/12/2200/MC/MKII
36.6 W	1210 mm	205 mm	65 mm	SL/LED/15/4200/MC/MKII
39.4 W	1210 mm	205 mm	65 mm	SL/LED/12/4970/MC/MKII
46.5 W	1210 mm	205 mm	65 mm	SL/LED/12/5970/MC/MKII
53.6 W	1210 mm	205 mm	65 mm	SL/LED/12/6960/MC/MKII
36.6 W	1510 mm	205 mm	65 mm	SL/LED/15/4200/MC/MKII
38.4 W	1510 mm	205 mm	65 mm	SL/LED/15/5280/MC/MKII
47.8 W	1510 mm	205 mm	65 mm	SL/LED/15/6600/MC/MKII
58.0 W	1510 mm	205 mm	65 mm	SL/LED/15/7600/MC/MKII
66.0 W	1510 mm	205 mm	65 mm	SL/LED/15/8700/MC/MKII

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.