



Application

A New Concept using LED Technology to produce Direct illuminance to create an environment in line with CIBSE LG7. Ideal for Offices, Reception Areas, Libraries, Schoolsetc... This fitting can be wire suspended, Surface Mounted, stand alone or Continuous with or without infills and PIR's.

Body

Formed from 1mm steel powder coated silver, white or any RAL Colour required. The downward light aspect is controlled via an high output diffuser and internal Miro 8 Reflector giving a very high L.O.R.

Sizes

(nominal) Length:
1200/1500 mm Width:
195 mm
Depth: 55 mm
Other sizes can be manufactured, as specials to order.
Can be Continuously Mounted with infill panels to any size if required.

Control Gear

- Standard LED
- DALI Dimming LED
- DSI Dimming LED
- WI-FI

Options Available

- Add /EMG to codes for Emergency
- Add /EMG/ST to codes for Self-Test Emergency
- Add /EMG/AD to codes for Addressable Emergency
- Add /DALI to codes for DALI Dimming
- Add /DSI to codes for DSI Dimming
- Add /WI-FI to codes for Wireless Control
- Add /WS for Wire Suspension
- Add /RS for Rod Suspension

Attachments


- Add /PIR to codes for Inbuilt PIR

LED Boards

All Luminaires are supplied with colour 840, 4000k LED's as standard. Options are available from 3000k to 5000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius.

Main Attributes

- Up to 136lm/watt
- 50,000 Hour Life
- High Colour Rendering
- Self Cooling
- CRI > 80
- 5 Year Guarantee

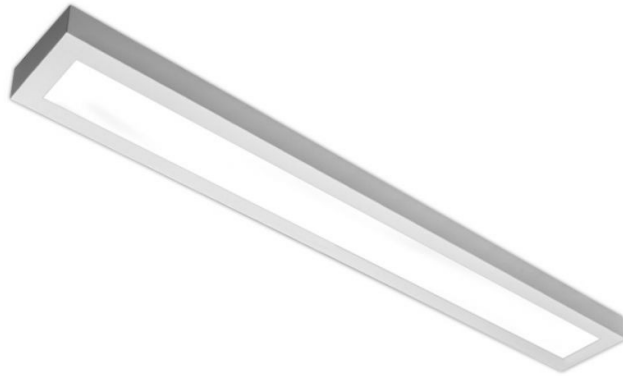

Catalogue Codes

Wattage	Lumens	Length	Width	Depth	Catalogue Code
19.9 W	2731 lm	1210 mm	195 mm	55 mm	SL/LED/12/3290/NT
24.4 W	3395 lm	1210 mm	195 mm	55 mm	SL/LED/12/4090/NT
29.0 W	4050 lm	1210 mm	195 mm	55 mm	SL/LED/12/4880/NT
32.0 W	4665 lm	1210 mm	195 mm	55 mm	SL/LED/12/5620/NT
39.0 W	5246 lm	1210 mm	195 mm	55 mm	SL/LED/12/6320/NT
44.0 W	5810 lm	1210 mm	195 mm	55 mm	SL/LED/12/7000/NT
49.2 W	6325 lm	1210 mm	195 mm	55 mm	SL/LED/12/7620/NT
30.0 W	4241 lm	1510 mm	195 mm	55 mm	SL/LED/15/5110/NT
35.8 W	5063 lm	1510 mm	195 mm	55 mm	SL/LED/15/6100/NT
42.0 W	5934 lm	1510 mm	195 mm	55 mm	SL/LED/15/7150/NT
48.0 W	6557 lm	1510 mm	195 mm	55 mm	SL/LED/15/7900/NT
54.5 W	7262 lm	1510 mm	195 mm	55 mm	SL/LED/15/8750/NT
61.0 W	7909 lm	1510 mm	195 mm	55 mm	SL/LED/15/9530/NT

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.