



Application

A new concept using LED technology to produce indirect illuminance.

Ideal for:

- Staircases
- Reception Areas
- Architectural Areas
- Lobby Areas
- Display Lighting

Body

Formed from extruded aluminium for an aesthetically pleasing finish and can be powder coated to any RAL colour.

Sizes (nominal)

All available lengths are dividable by 280 mm. Please consider this when ordering this product. Sizes are manufactured to order.

Control Gear


Standard LED

Options Available

- Add /DALI for DALI Dimming
- Add /PIR for Built in Sensor
- Add /EMG for Emergency Mode

Lamps

All Luminaires are supplied with colour 840, 4000k LED's as standard. Options are available from 3000k to 5000k. All LED data and performance data is taken at an ambient temperature of +25 degrees Celsius

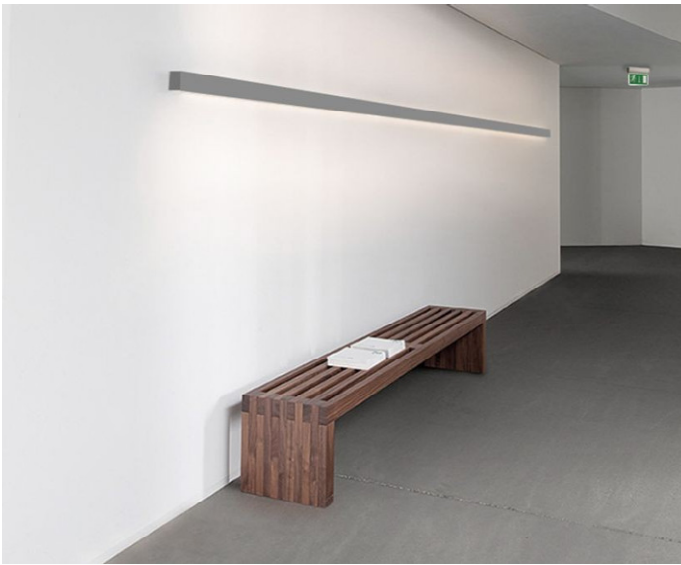

Catalogue Codes

All available lengths are dividable by 280 mm. Please consider this when ordering this product.

Wattage	Length	Height	Depth	mA	Catalogue Code
15.6 W	300 mm	85 mm	43 mm	250 mA	SL/LED/2540/N-A/CON/WM/250
19.2 W	300 mm	85 mm	43 mm	300 mA	SL/LED/2960/N-A/CON/WM/300
22.8 W	300 mm	85 mm	43 mm	350 mA	SL/LED/3380/N-A/CON/WM/350
31.4 W	600 mm	85 mm	43 mm	250 mA	SL/LED/5080/N-A/CON/WM/250
38.6 W	600 mm	85 mm	43 mm	300 mA	SL/LED/5960/N-A/CON/WM/300
45.6 W	600 mm	85 mm	43 mm	350 mA	SL/LED/6780/N-A/CON/WM/350

Additional lumen outputs are available and codes may vary from those stated. Please contact us for further details.

All luminaires comply with CIBSE Lighting Guide and are designed and manufactured to conform to the general requirements of BS4533. A stringent quality control operation in accordance with ISO 9001 ensures customer satisfaction. All luminaires are accredited with the CE mark.