



DESIGN GUIDE

TABLE OF CONTENTS

3	M SERIES OVENS
15	E SERIES OVENS
27	CONVECTION STEAM OVENS
32	MICROWAVE OVENS
37	WARMING DRAWERS
42	INDUCTION COOKTOPS
47	GAS COOKTOPS
52	MODULE COOKTOPS
60	COFFEE SYSTEMS
65	CUP WARMING DRAWERS
69	VACUUM SEAL DRAWER
73	DUAL FUEL RANGES
78	SEALED BURNER RANGETOPS
82	OUTDOOR GRILLS MODULES ACCESSORIES
92	COOKTOP VENTILATION
104	DOWNDRAFT VENTILATION
109	PRO VENTILATION
116	WOLF WARRANTIES



Features and specifications are subject to change at any time without notice.

Throughout this guide, dimensions may vary by ± 3 mm.

M Series Built-In Ovens


Four striking looks are just the beginning. Superior performance features include our advanced Dual VertiCross™ convection fan system, touch-screen controls, convenient preset cooking programs, and improved interior lighting. There is more usable space inside for deliciousness on a grand scale. M series ovens can be installed in a standard or flush inset application.

M SERIES OVENS

TRANSITIONAL



ICBSO30TM/S/TH




ICBDO30TM/S/TH

PROFESSIONAL



ICBSO30PM/S/PH



ICBDO30PM/S/PH


CONTEMPORARY



ICBSO30CM/S



ICBSO30CM/B




ICBDO30CM/S




ICBDO30CM/B

M Series Built-In Ovens

TRANSITIONAL SINGLE OVEN

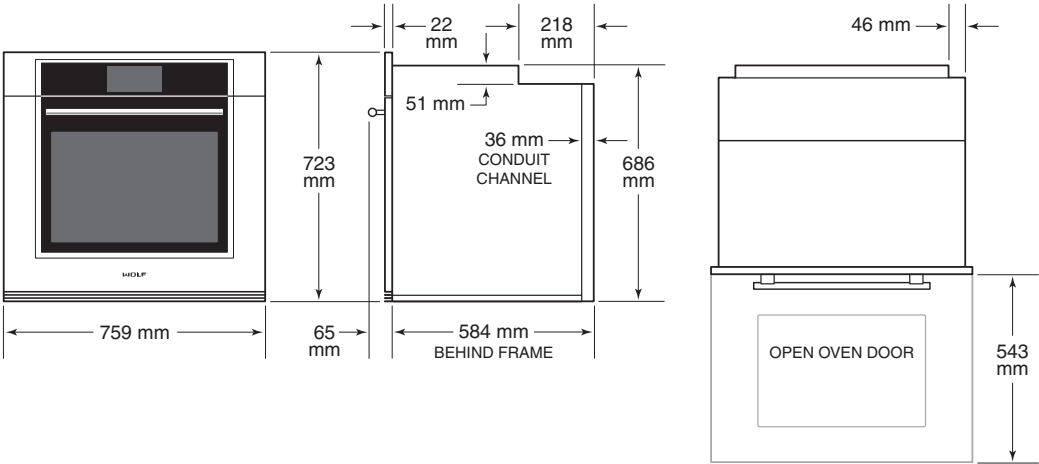


TRANSITIONAL DOUBLE OVEN

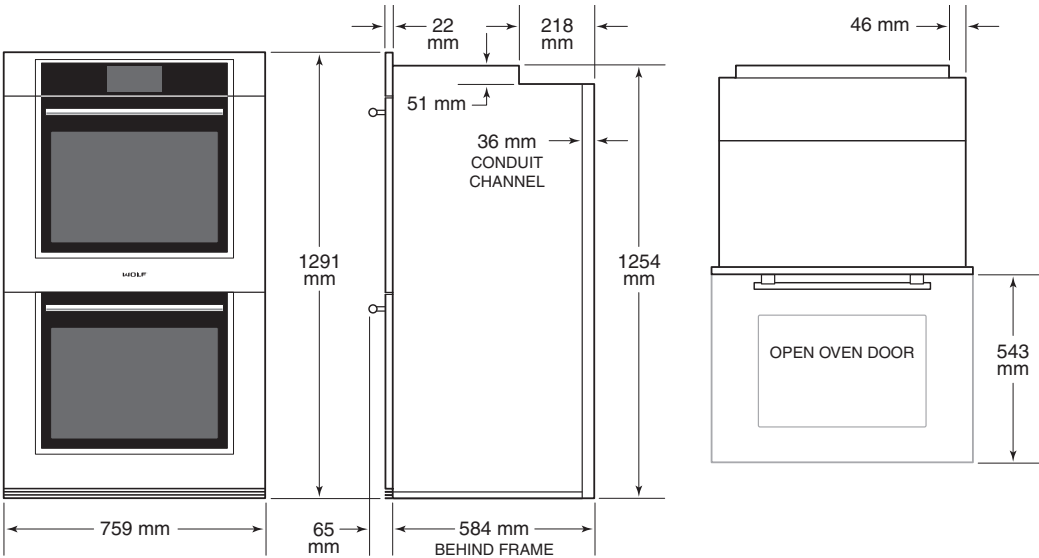


M SERIES OVENS

M Series Built-In Ovens

PROFESSIONAL SINGLE OVEN

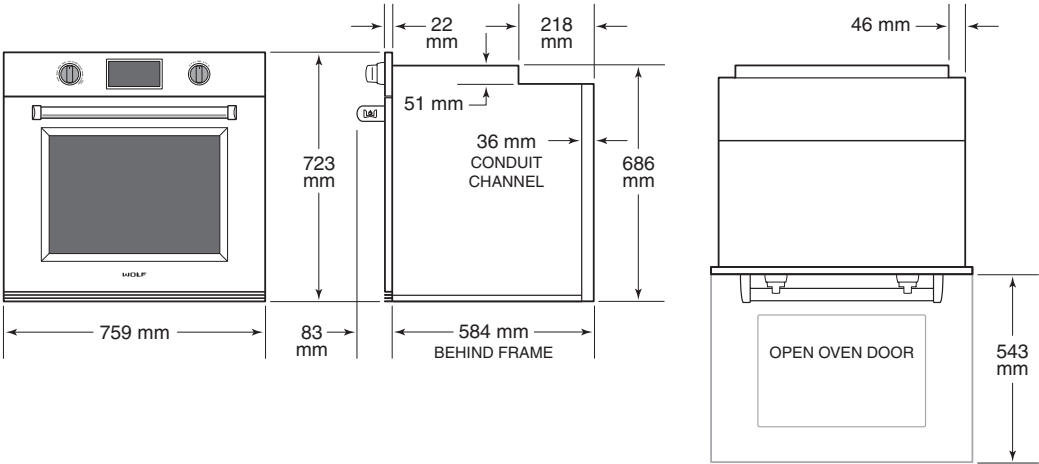


PROFESSIONAL DOUBLE OVEN

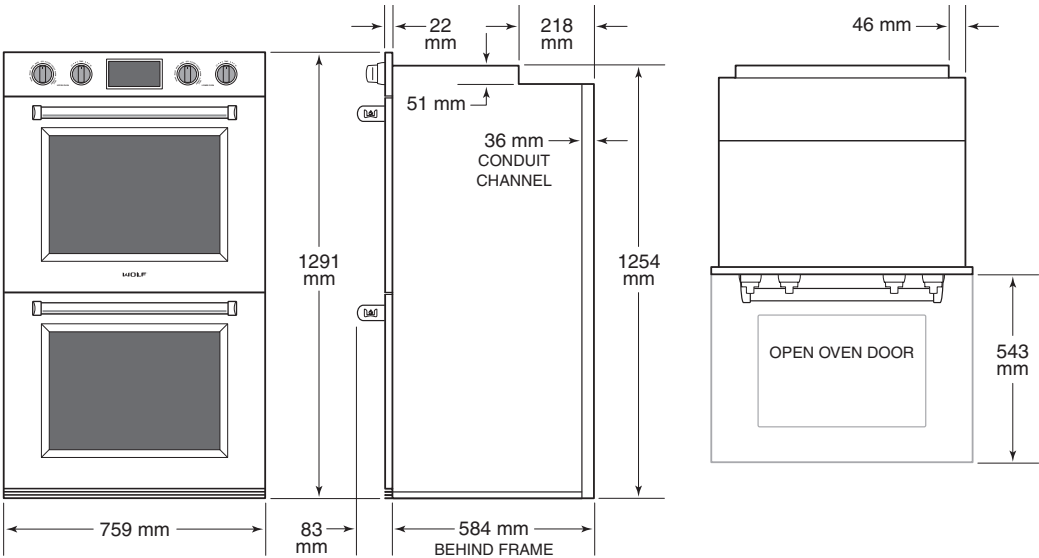


M Series Built-In Ovens

CONTEMPORARY STAINLESS STEEL SINGLE OVEN

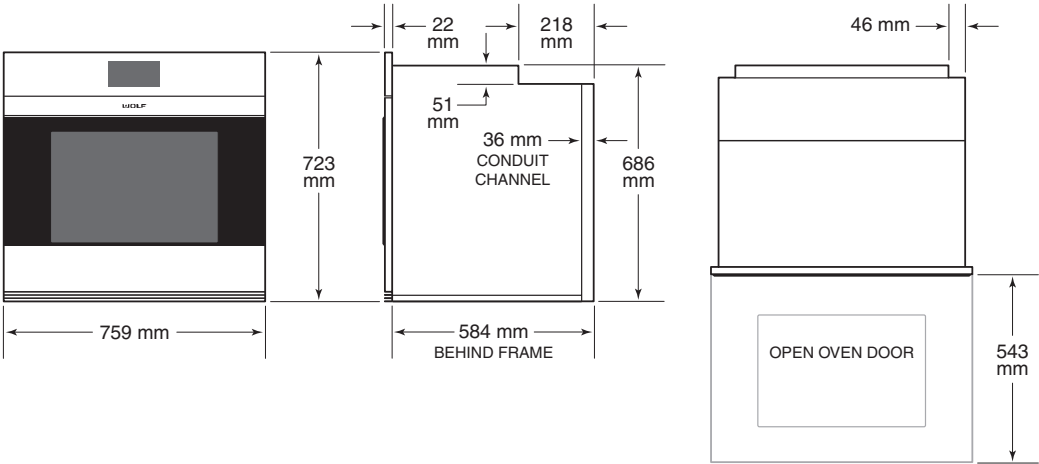


CONTEMPORARY STAINLESS STEEL DOUBLE OVEN

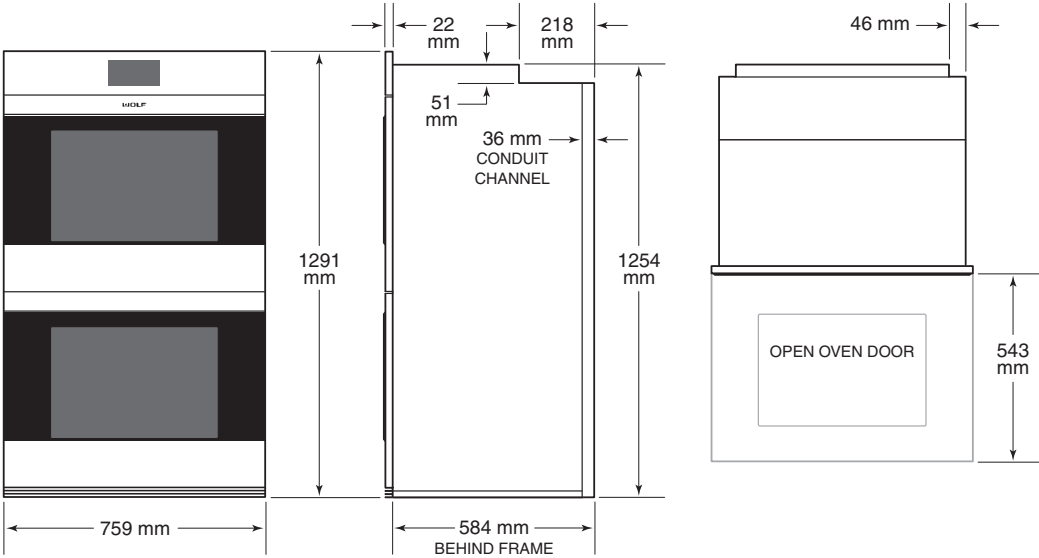


M SERIES OVENS

M Series Built-In Ovens

CONTEMPORARY BLACK GLASS SINGLE OVEN

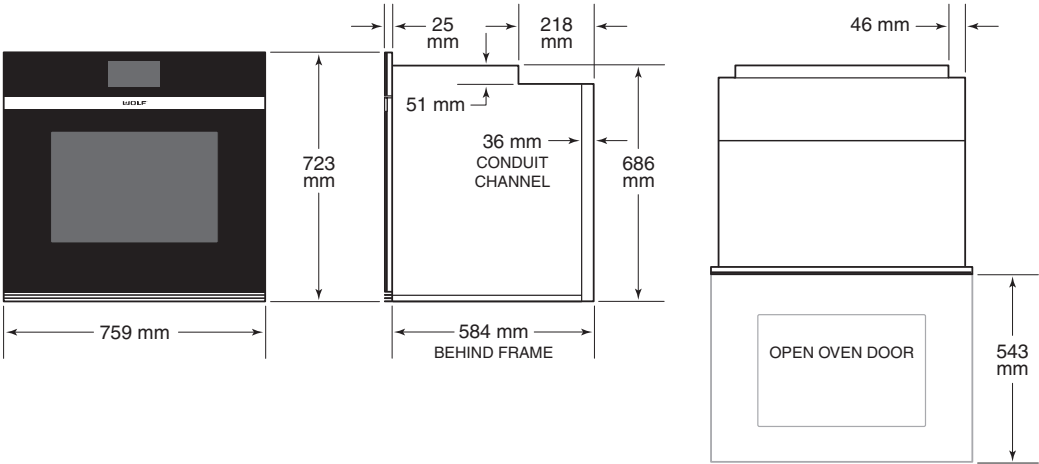

CONTEMPORARY BLACK GLASS DOUBLE OVEN

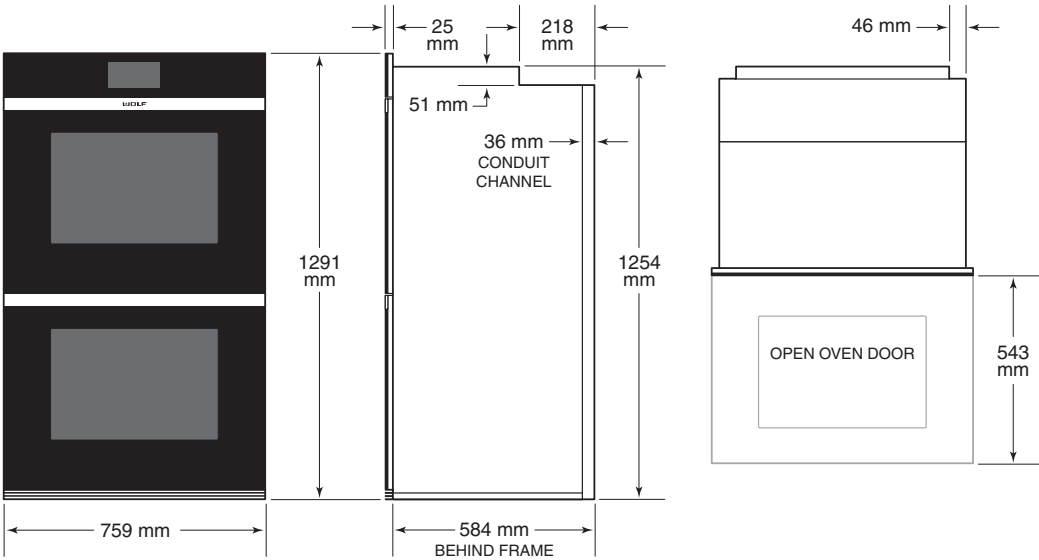

Planning Information

The M series oven can be installed in a standard or flush inset application. If a cooktop is installed above an oven, a minimum of 6 mm is required between the units. Location of the electrical supply within the oven opening may require additional cabinet depth.

Finish the edges of the opening. They may be visible when the door is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Single Oven		115 kg
Double Oven		181 kg
TRIM OVERLAP		
Top		25 mm
Bottom		0 mm
Sides		18 mm

DUAL INSTALLATION

Two 76 cm single M series ovens can be installed side by side in a standard or flush inset application. A dual installation kit is required. To maintain appropriate airflow, the ovens must be installed into one opening. Any cosmetic or structural material placed between the ovens will impede airflow and is not recommended. Refer to the illustrations on the following pages.

The dual installation kit is available through an authorized Wolf dealer.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply flush with the back wall and within the shaded area shown in the illustration for your specific installation on the following pages. For ease of installation, the electrical supply for the oven can be placed in an adjacent cabinet within reach of the conduit.

Performance may be compromised if the electrical supply is less than 220 volts.


The oven is supplied with a single phase and 3-phase convertible power inlet box. The wiring diagram covering the control circuit is provided with the oven.

ELECTRICAL REQUIREMENTS

SINGLE OVEN	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
Maximum Connected Load	4.2-4.8 kW	3.0-3.6 kW
DOUBLE OVEN	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
Maximum Connected Load	8.4-9.6 kW	4.2-4.8 kW

M Series Single Oven

FLUSH INSET INSTALLATION

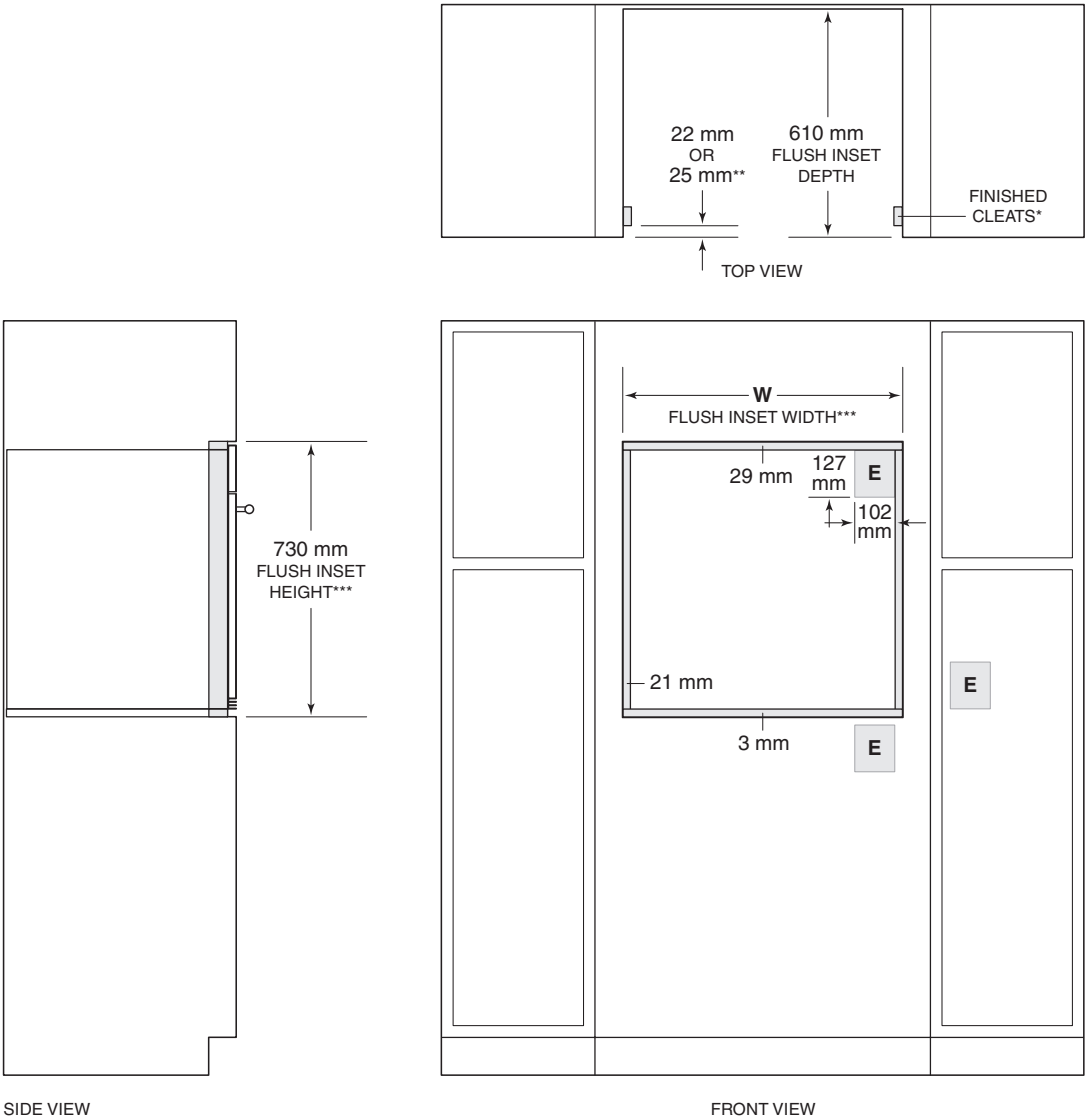


*25 mm minimum depth. Shaded areas will be visible and should be finished to match cabinetry.
**22 mm for transitional, professional and contemporary stainless steel models and 25 mm for contemporary black glass model.
***Dimension provides minimum reveals.
NOTE: Location of electrical supply within opening may require additional cabinet depth.

FLUSH INSET WIDTH	W
76 cm Model	765 mm

M Series Double Oven

STANDARD INSTALLATION

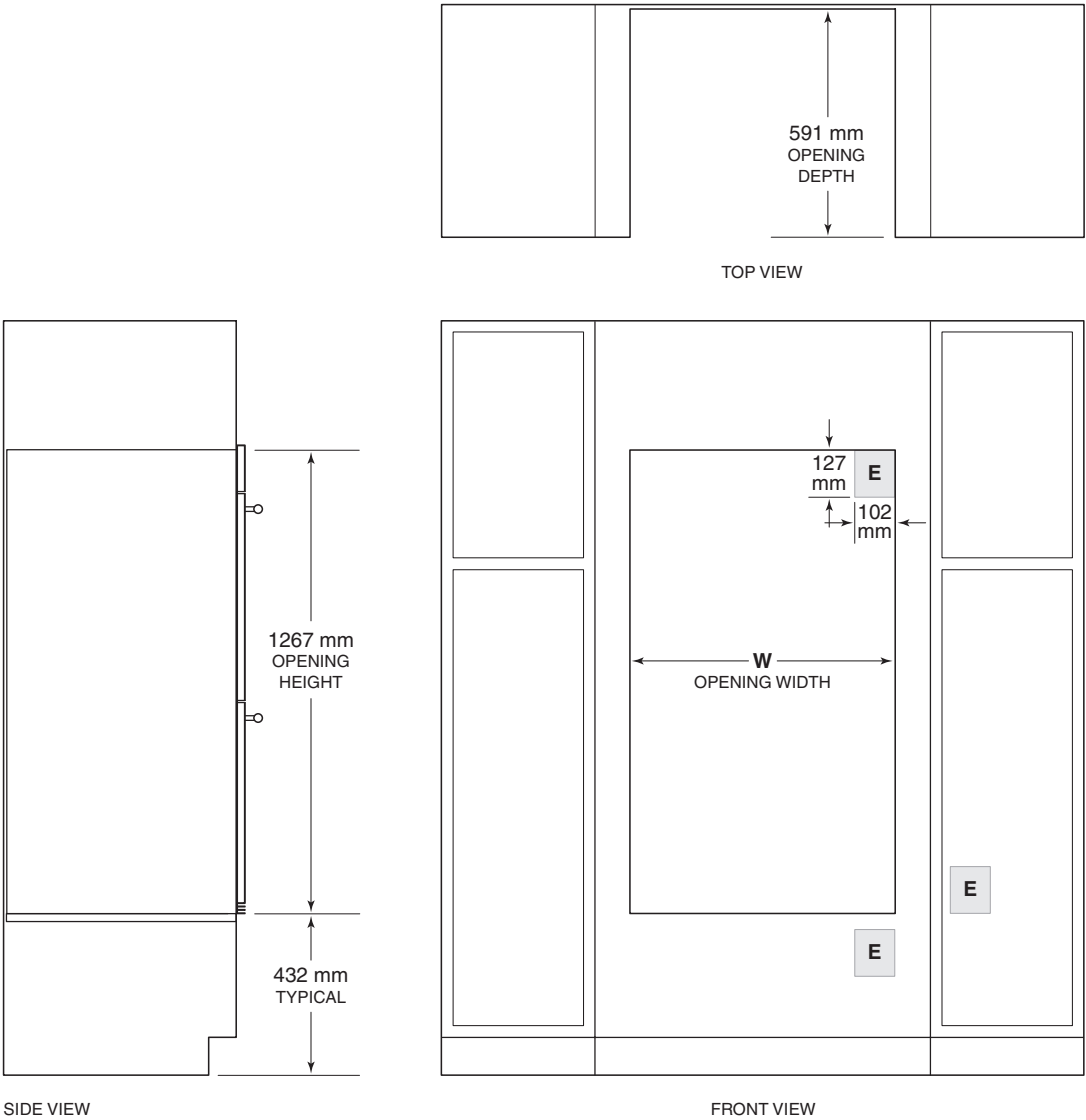


NOTE: Location of electrical supply within opening may require additional cabinet depth.

OPENING WIDTH	W
76 cm Model	724 mm

M SERIES OVENS

M Series Single Oven

DUAL STANDARD INSTALLATION

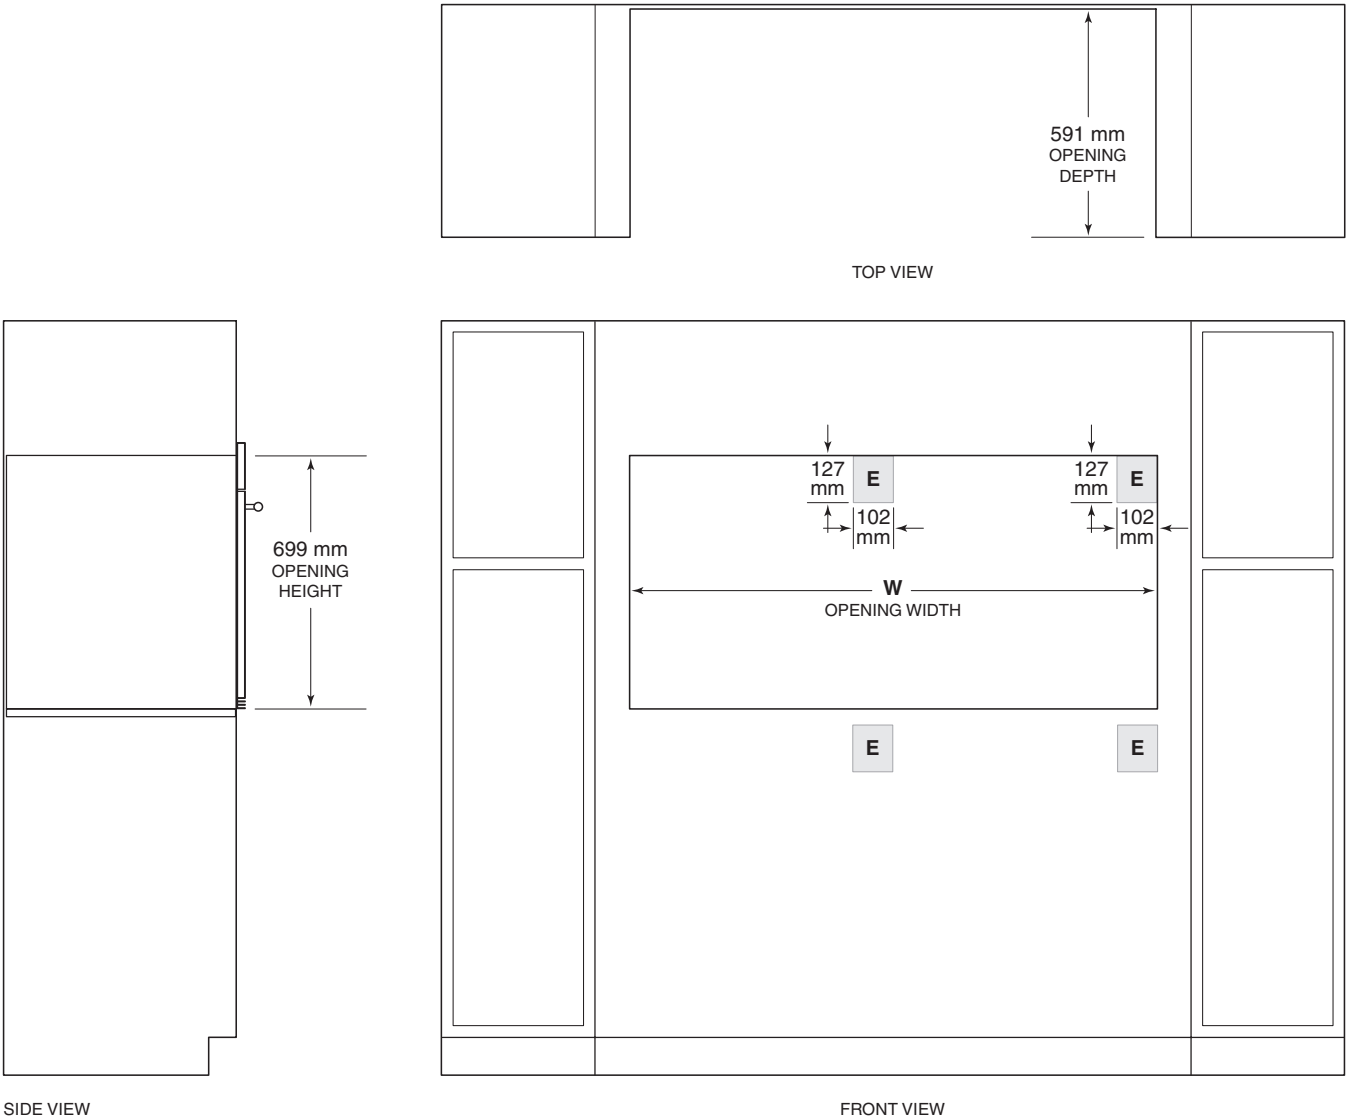

NOTE: Location of electrical supply within opening may require additional cabinet depth. A dual installation kit is required for this installation.


DUAL OPENING WIDTH	W
Two 76 cm Models	1486 mm

E Series Built-In Ovens

Stainless models feature a redesigned stainless steel touch-action control panel, helping to create great meals with ease, as well as adding a striking design feature to the kitchen. Smart technology gives the E series ten cooking modes, with Wolf’s innovative dual convection in single ovens and in the upper unit of double ovens. Wolf E series ovens are crafted of stainless steel. Tubular handles have been updated to match the rest of the new Wolf cooking appliance offering, providing a more cohesive look. E series ovens can be installed in a standard or flush inset application.

E SERIES OVENS


TRANSITIONAL




ICBSO2418TE/S/TH



ICBSO24TE/S/TH



ICBSO30TE/S/TH




ICBDO30TE/S/TH

PROFESSIONAL




ICBSO30PE/S/PH




ICBDO30PE/S/PH

CONTEMPORARY




ICBSO30CE/B/TH




ICBDO30CE/B/TH

60 cm E Series Ovens

MODEL ICBSO2418TE/S/TH TRANSITIONAL SINGLE OVEN

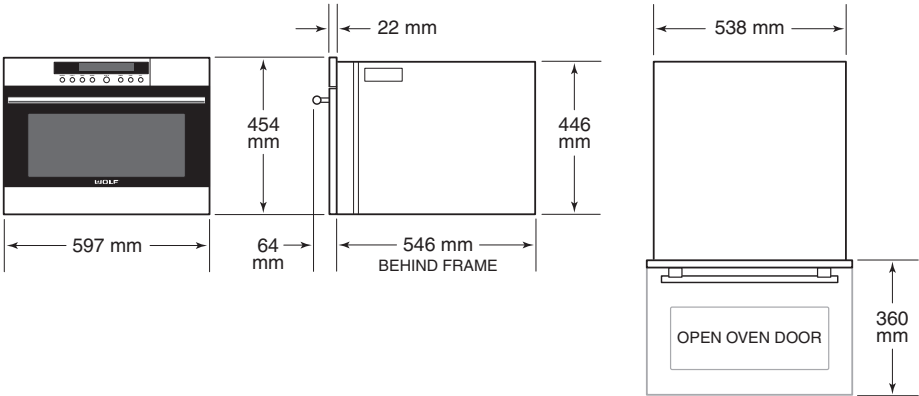


MODEL ICBSO24TE/S/TH TRANSITIONAL SINGLE OVEN

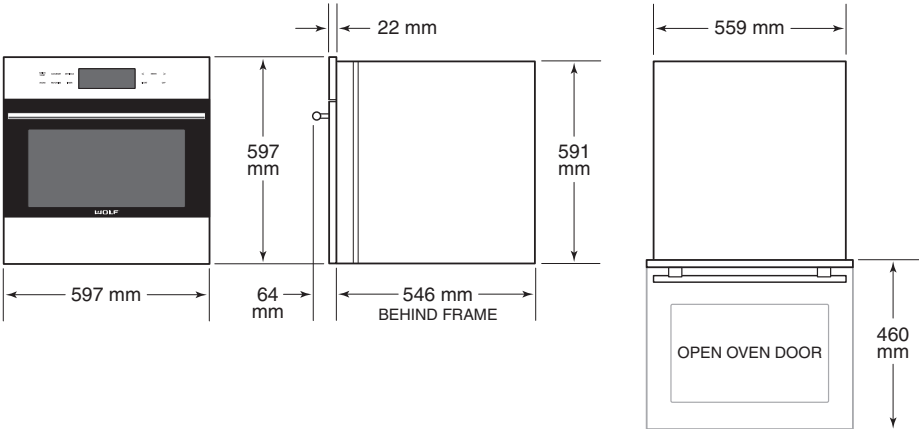


76 cm E Series Ovens

TRANSITIONAL SINGLE OVEN

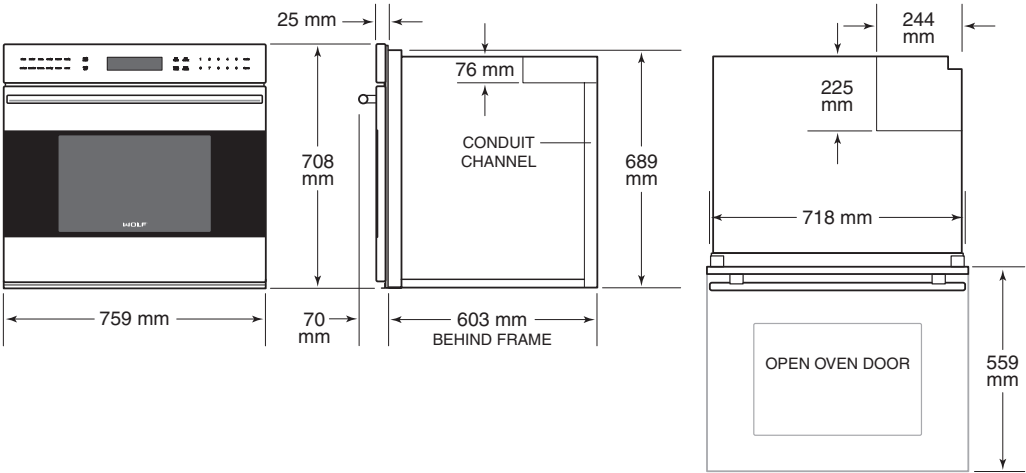


TRANSITIONAL DOUBLE OVEN

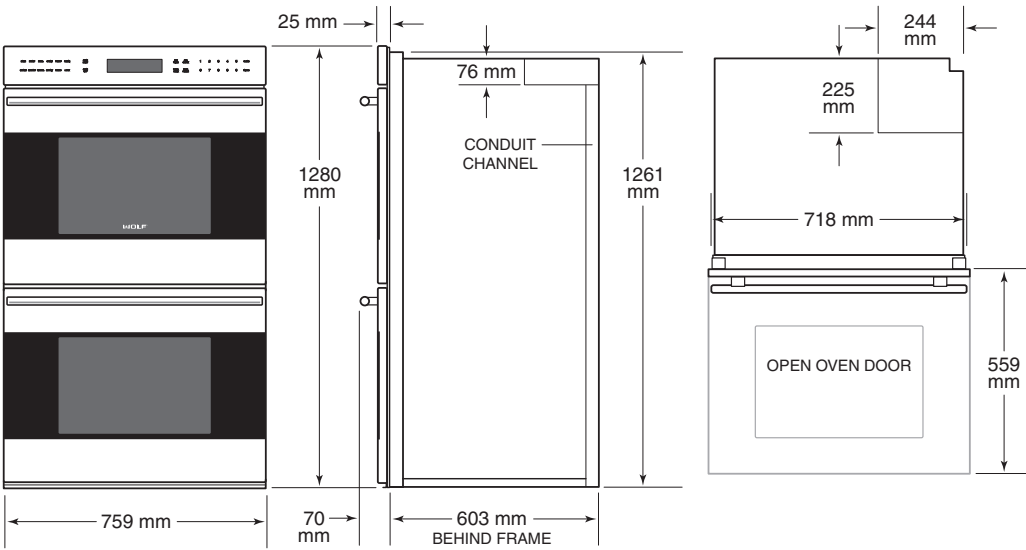


76 cm E Series Ovens

PROFESSIONAL SINGLE OVEN

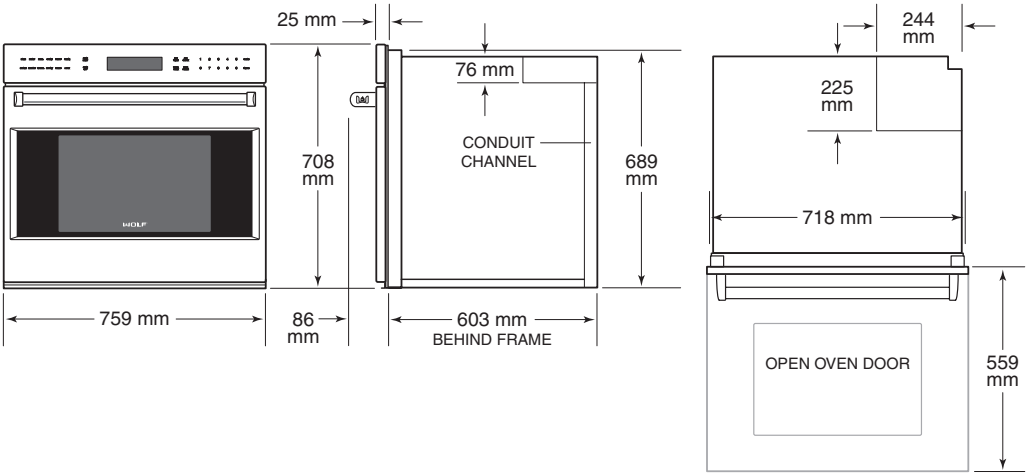


PROFESSIONAL DOUBLE OVEN

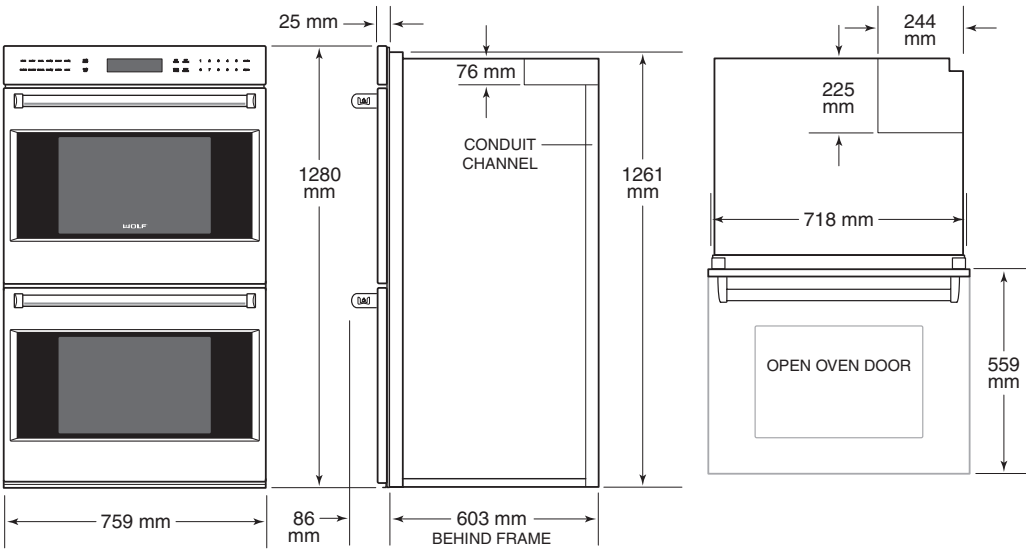


76 cm E Series Ovens

CONTEMPORARY SINGLE OVEN

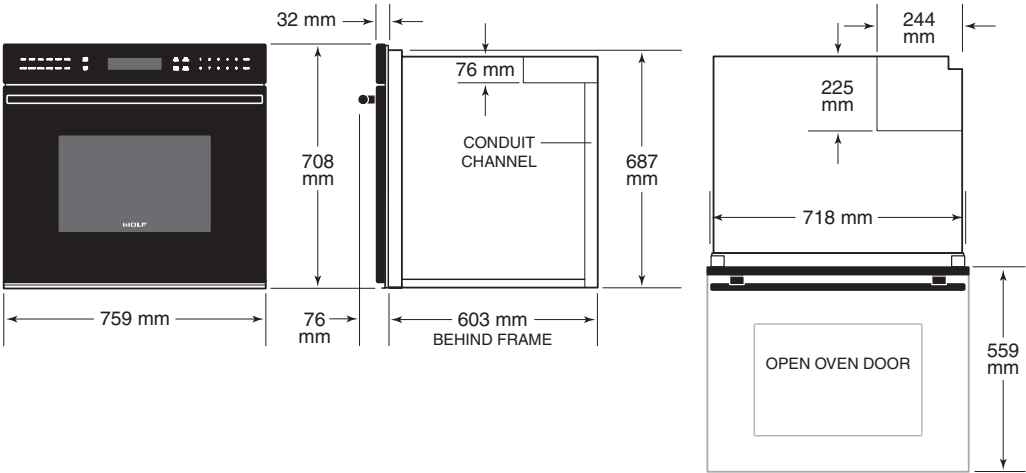

CONTEMPORARY DOUBLE OVEN

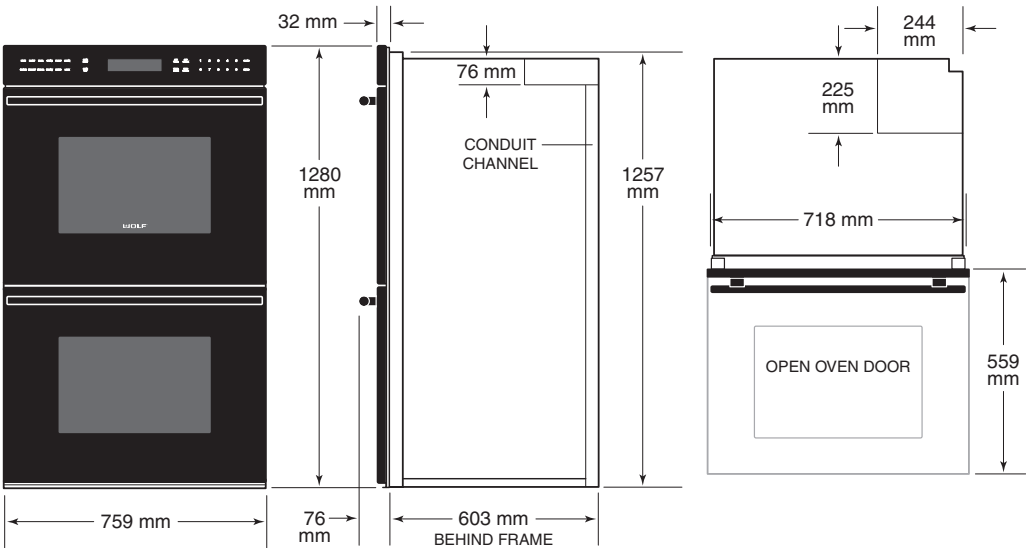

Planning Information

The E series oven can be installed in a standard or flush inset application. If a cooktop is installed above an oven, a minimum of 6 mm is required between the units. Location of the electrical supply within the oven opening may require additional cabinet depth.

Finish the edges of the opening. They may be visible when the door is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 6 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
60 cm Single Oven		68 kg
76 cm Single Oven		115 kg
76 cm Double Oven		181 kg
TRIM OVERLAP	60 cm MODEL	76 cm MODEL
Top	6 mm	13 mm
Bottom	0 mm	3 mm
Sides	17 mm	17 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply flush with the back wall and within the shaded area shown in the illustration for your specific installation on the following pages. For ease of installation, the electrical supply for the oven can be placed in an adjacent cabinet. The 76 cm ovens are supplied with a terminal box convertible to single or 3-phase.

The wiring diagram covering the control circuit is provided with the oven.

ELECTRICAL REQUIREMENTS


60 cm SINGLE OVEN	
Electrical Supply	220-240 V AC, 50 Hz
Service	3400 W
Receptacle	grounding-type (earthed)
Power Cord	1.8 m

ELECTRICAL REQUIREMENTS

76 cm SINGLE OVEN	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
Max Connected Load	4.4 kW	4.4 kW
Total Amps	19	19
76 cm DOUBLE OVEN	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
Max Connected Load	7.4 kW	5.1 kW
Total Amps	32	22

60 cm E Series Oven

STANDARD INSTALLATION

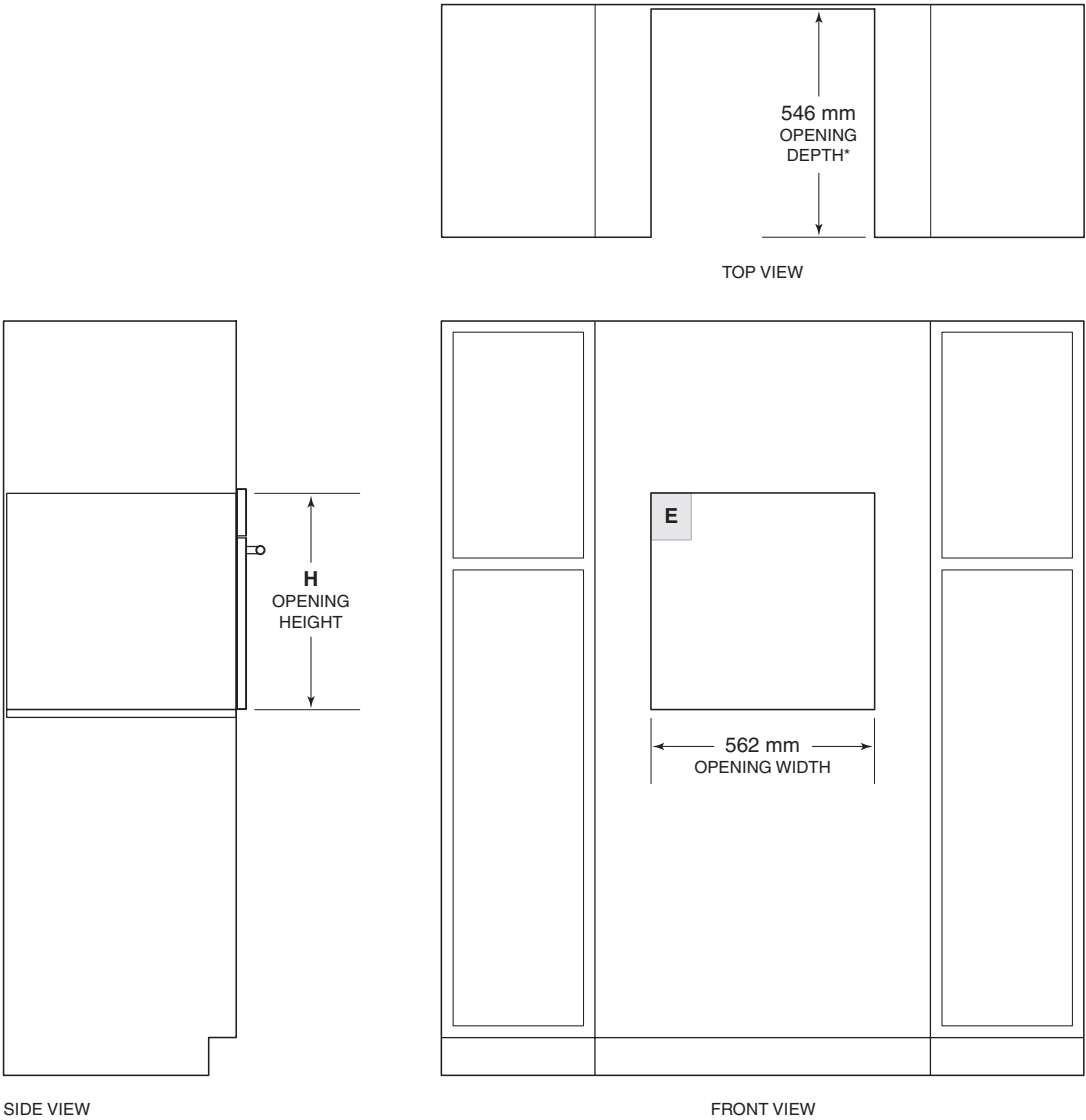


**Does not include additional depth for the electrical connection.*

OPENING HEIGHT	H
ICBSO2418TE/S/TH	449 mm
ICBSO24TE/S/TH	591 mm

60 cm E Series Oven

FLUSH INSET INSTALLATION

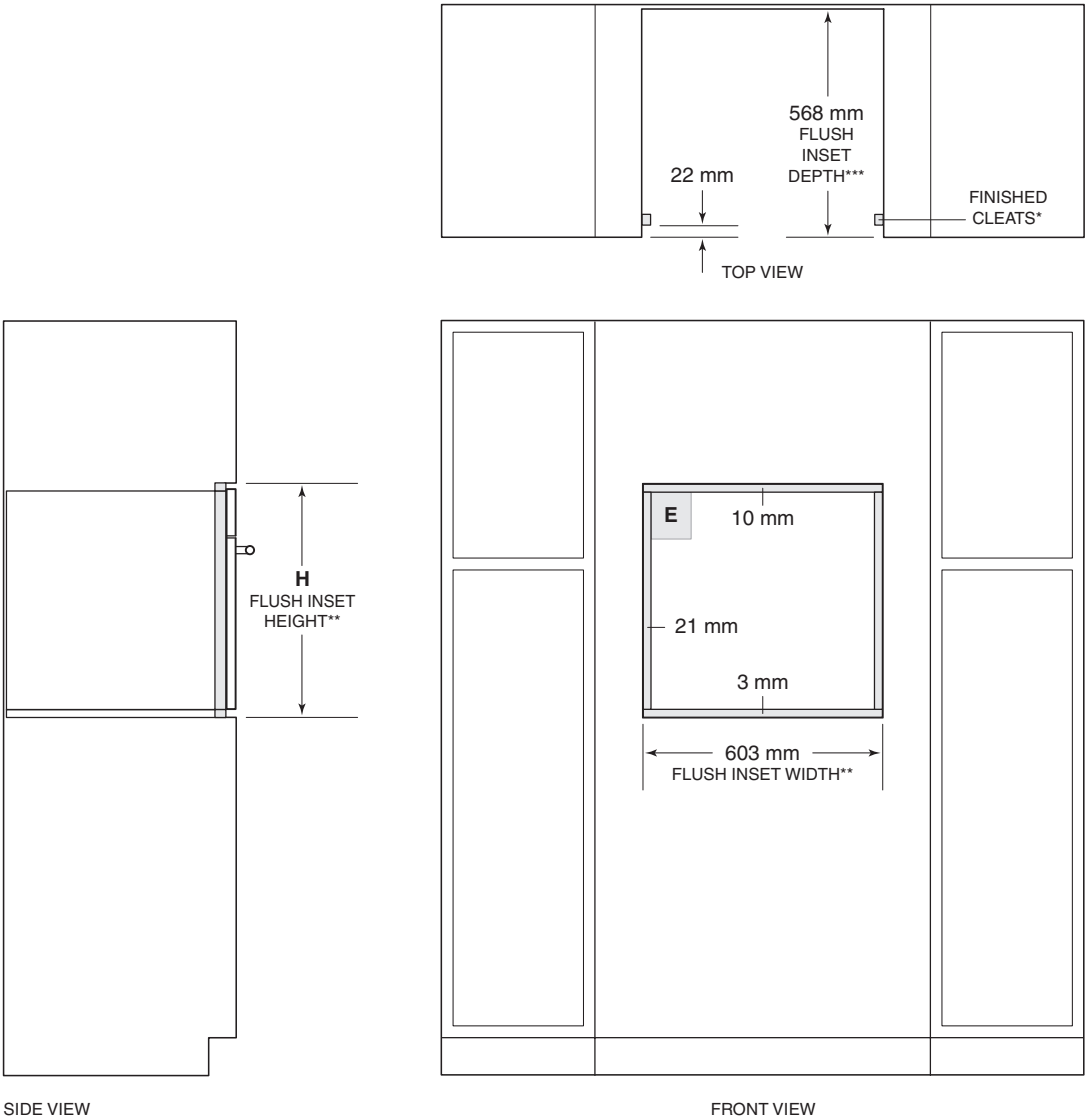


*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
***Does not include additional depth for the electrical connection.

FLUSH INSET HEIGHT	H
ICBSO2418TE/S/TH	467 mm
ICBSO24TE/S/TH	603 mm

76 cm E Series Single Oven



STANDARD INSTALLATION

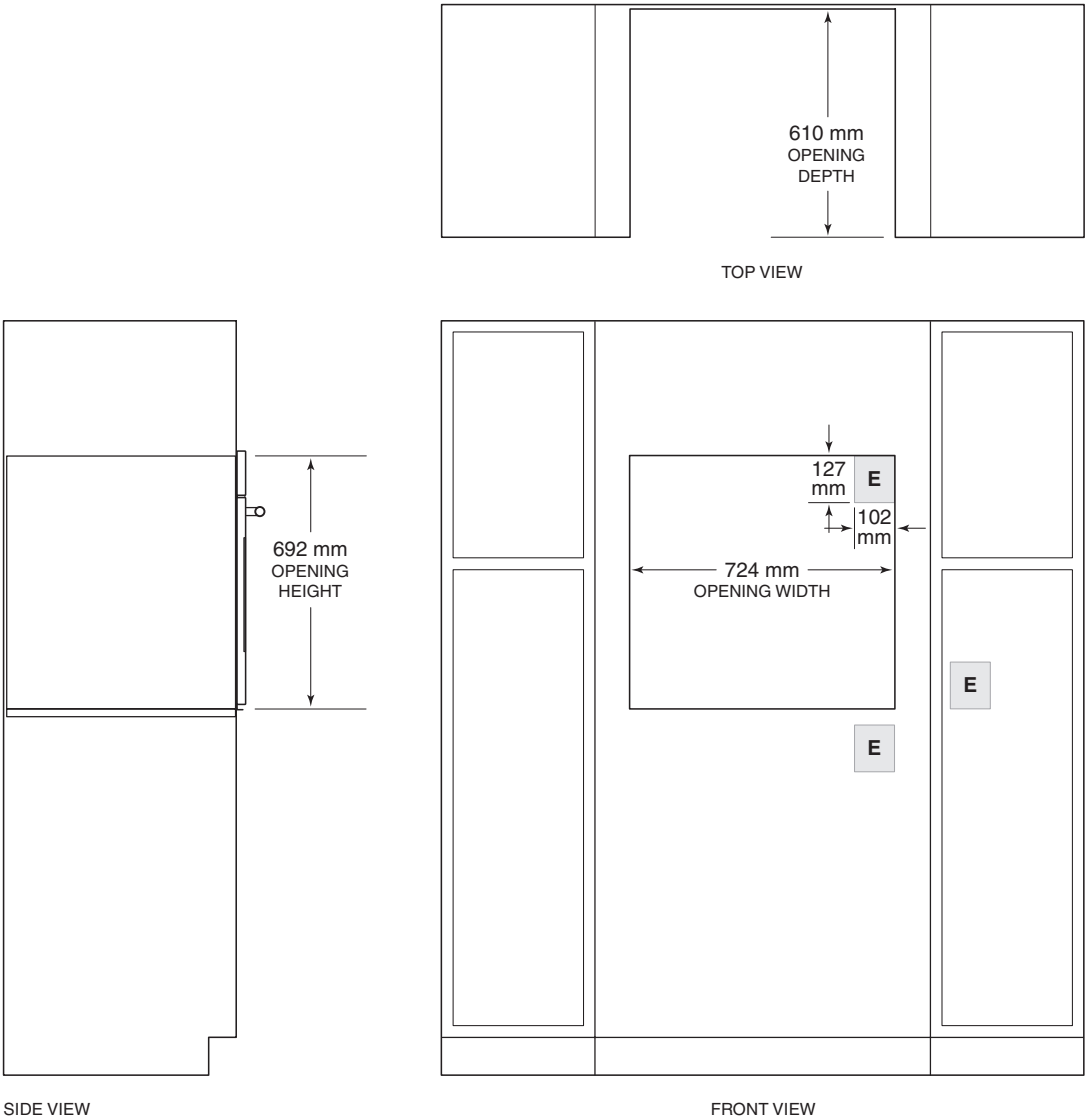


NOTE: Location of electrical supply within opening may require additional cabinet depth.

76 cm E Series Single Oven

FLUSH INSET INSTALLATION

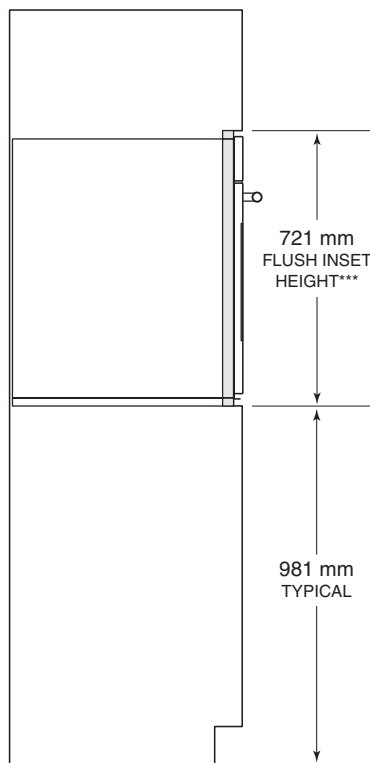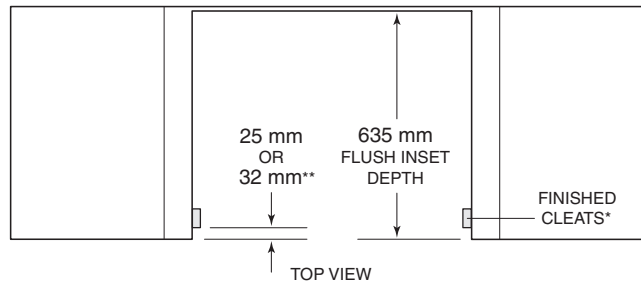

SIDE VIEW

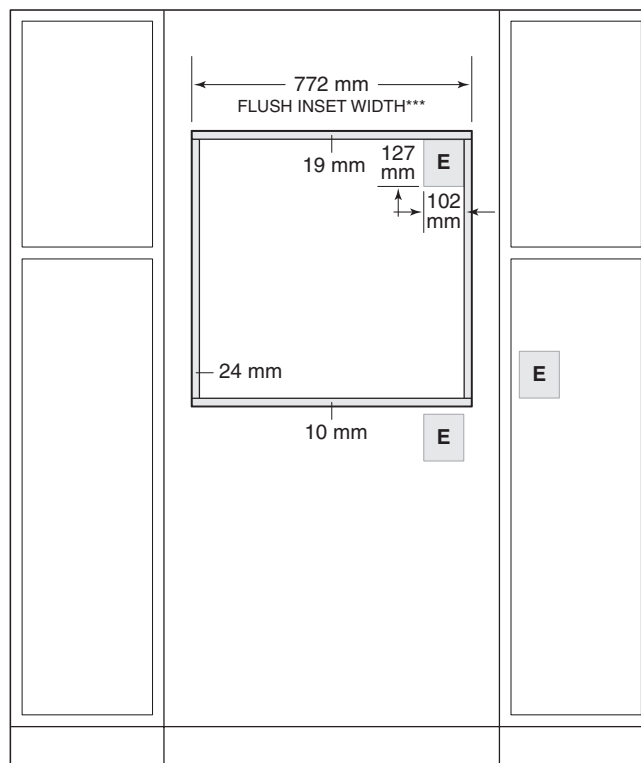

FRONT VIEW

**Will be visible and should be finished to match cabinetry.*


****25 mm for professional and transitional models and 32 mm for contemporary model.**

***Dimension provides minimum reveals.

NOTE: Location of electrical supply within opening may require additional cabinet depth.

76 cm E Series Double Oven


STANDARD INSTALLATION

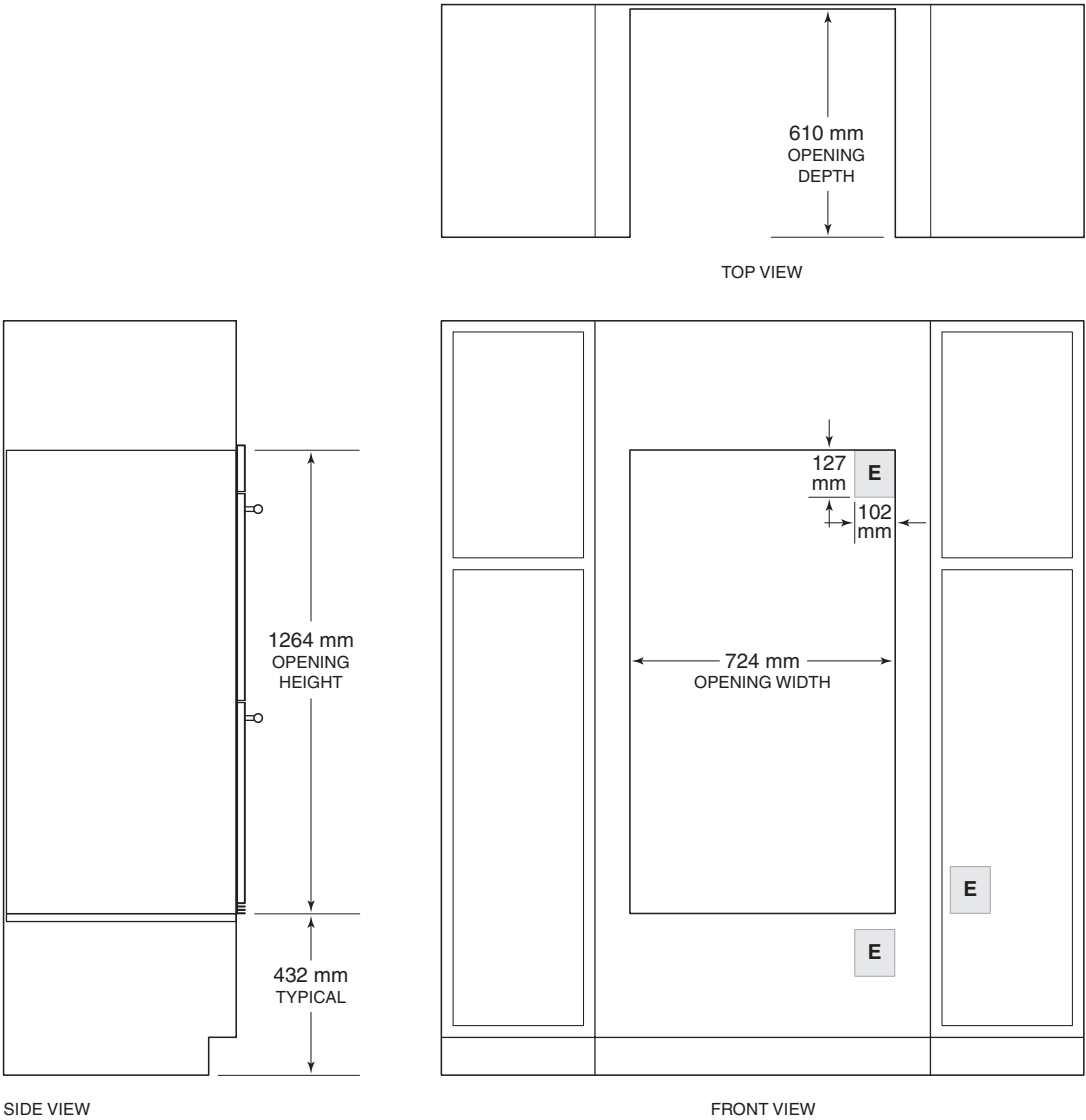

NOTE: Location of electrical supply within opening may require additional cabinet depth.

76 cm E Series Double Oven

FLUSH INSET INSTALLATION

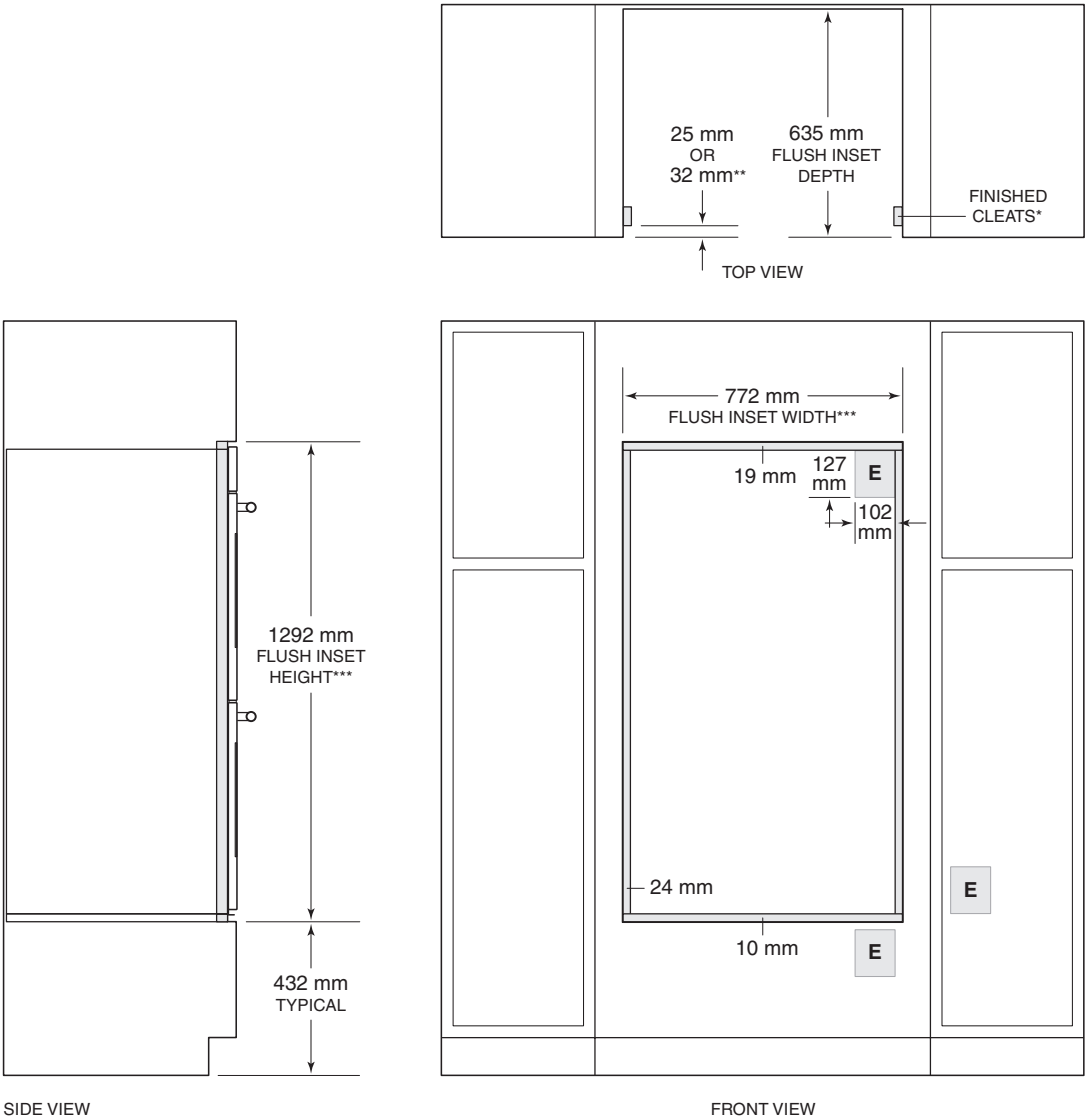

*Will be visible and should be finished to match cabinetry.

**25 mm for professional and transitional models and 32 mm for contemporary model.

***Dimension provides minimum reveals.

NOTE: Location of electrical supply within opening may require additional cabinet depth.

Convection Steam Ovens

The legacy of the “combination oven” goes back decades, to innovative chefs in America and Europe who embraced the combination of air movement with superheated steam to achieve superior results—from breads and roasts to delicate fishes, seafood, and vegetables. Wolf combines the benefits of convection and steam for the most innovative steam oven on the market today. Virtually any dish prepared in a conventional oven, range, or microwave can also be prepared in the Wolf convection steam oven—with more control. Two widths and three distinct styles compliment the look of Wolf ovens, ranges, and cooktops. Convection steam ovens can be installed in a standard or flush inset application.

CONVECTION STEAM OVENS


TRANSITIONAL



ICBCSO24TE/S/TH




ICBCSO30TM/S/TH




ICBCSO30TE/S/TH

PROFESSIONAL



ICBCSO30PM/S/PH



ICBCSO30PE/S/PH

CONTEMPORARY




ICBCSO30CM/B/TH

CONVECTION STEAM OVENS


Convection Steam Ovens

TRANSITIONAL

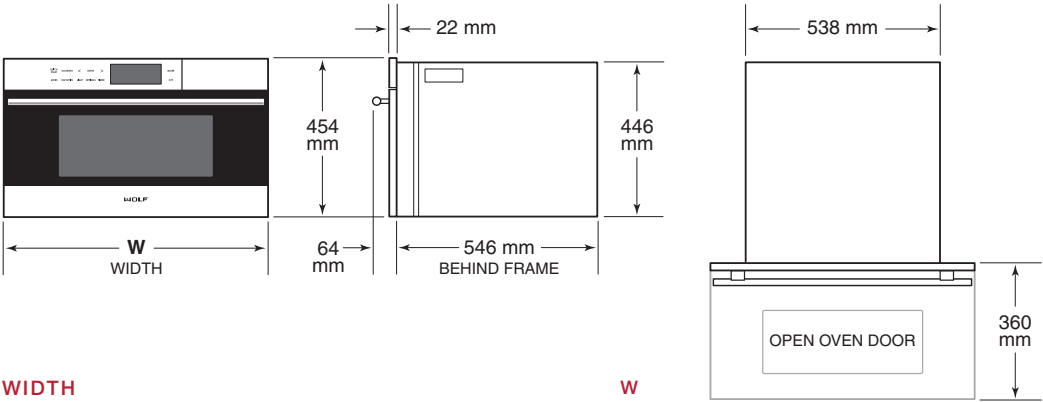


WIDTH	W
60 cm Transitional	597 mm
76 cm Transitional	759 mm

PROFESSIONAL

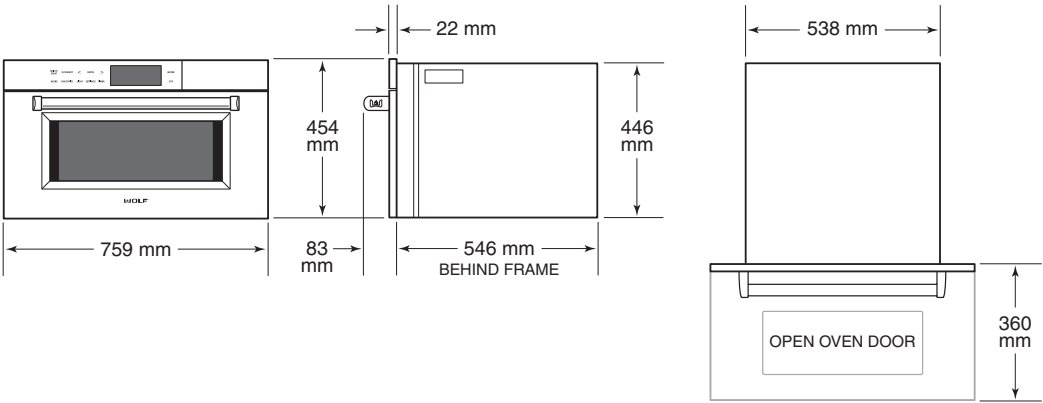

CONTEMPORARY

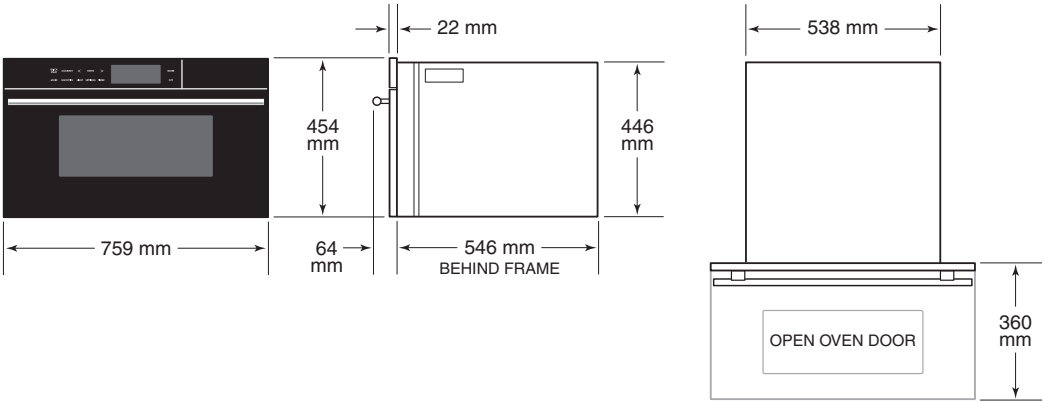

Planning Information

The convection steam oven can be installed in a standard or flush inset application.

Finish the edges of the opening. They may be visible when the door is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Convection Steam Oven		45 kg
TRIM OVERLAP	60 cm MODEL	76 cm MODEL
Top	5 mm	5 mm
Bottom	0 mm	0 mm
Sides	18 mm	98 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.


Performance may be compromised if the electrical supply is less than 220 volts.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50 Hz
Service	3800 W
Receptacle	grounding-type (earthed)
Power Cord	1.8 m

Convection Steam Oven

STANDARD INSTALLATION

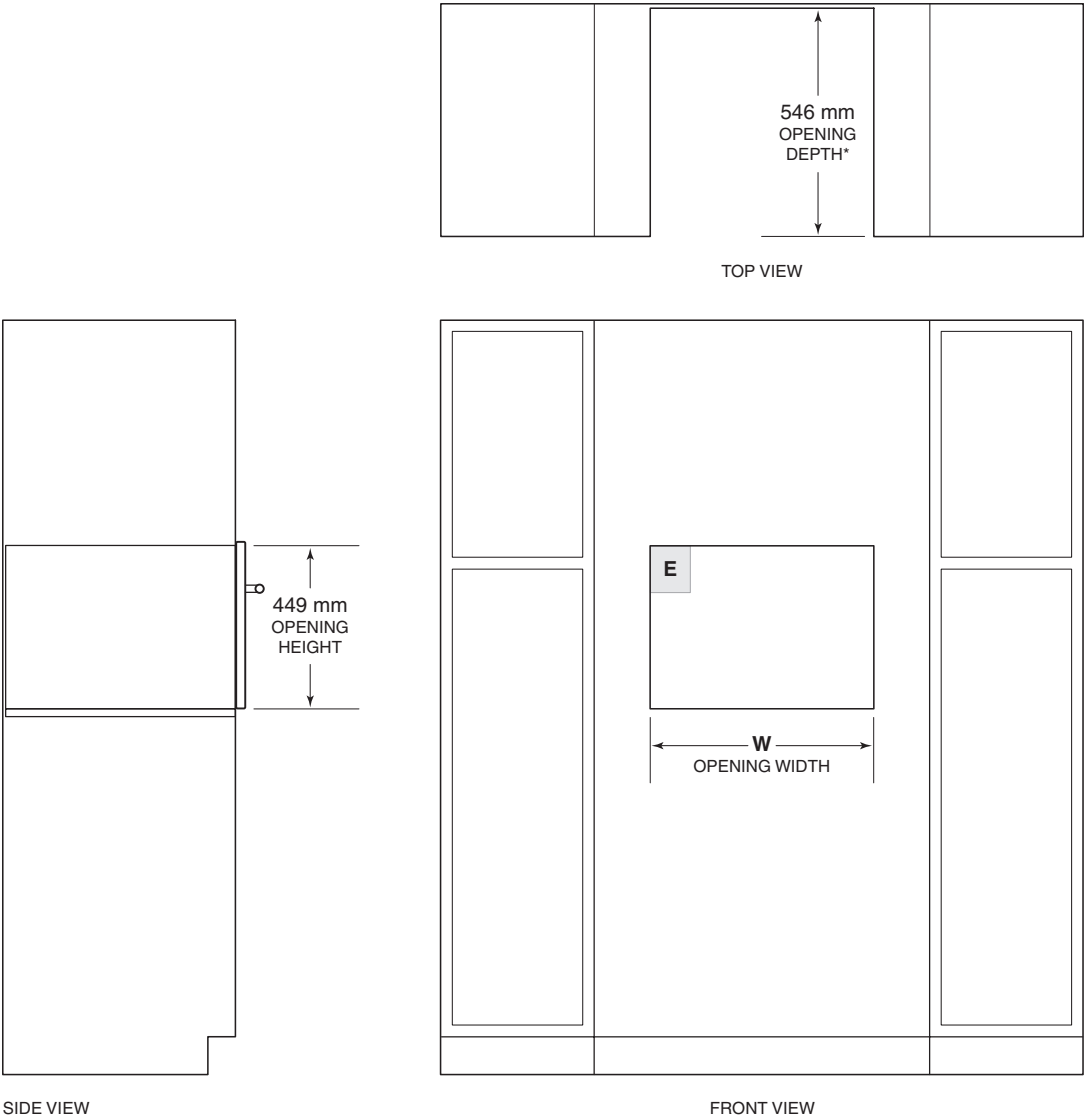


**Does not include additional depth for the electrical connection.
NOTE: Both 60 cm and 76 cm models require the same opening dimensions.*

OPENING WIDTH	W
60 cm Model	562 mm
76 cm Model	562 mm

Convection Steam Oven

FLUSH INSET INSTALLATION

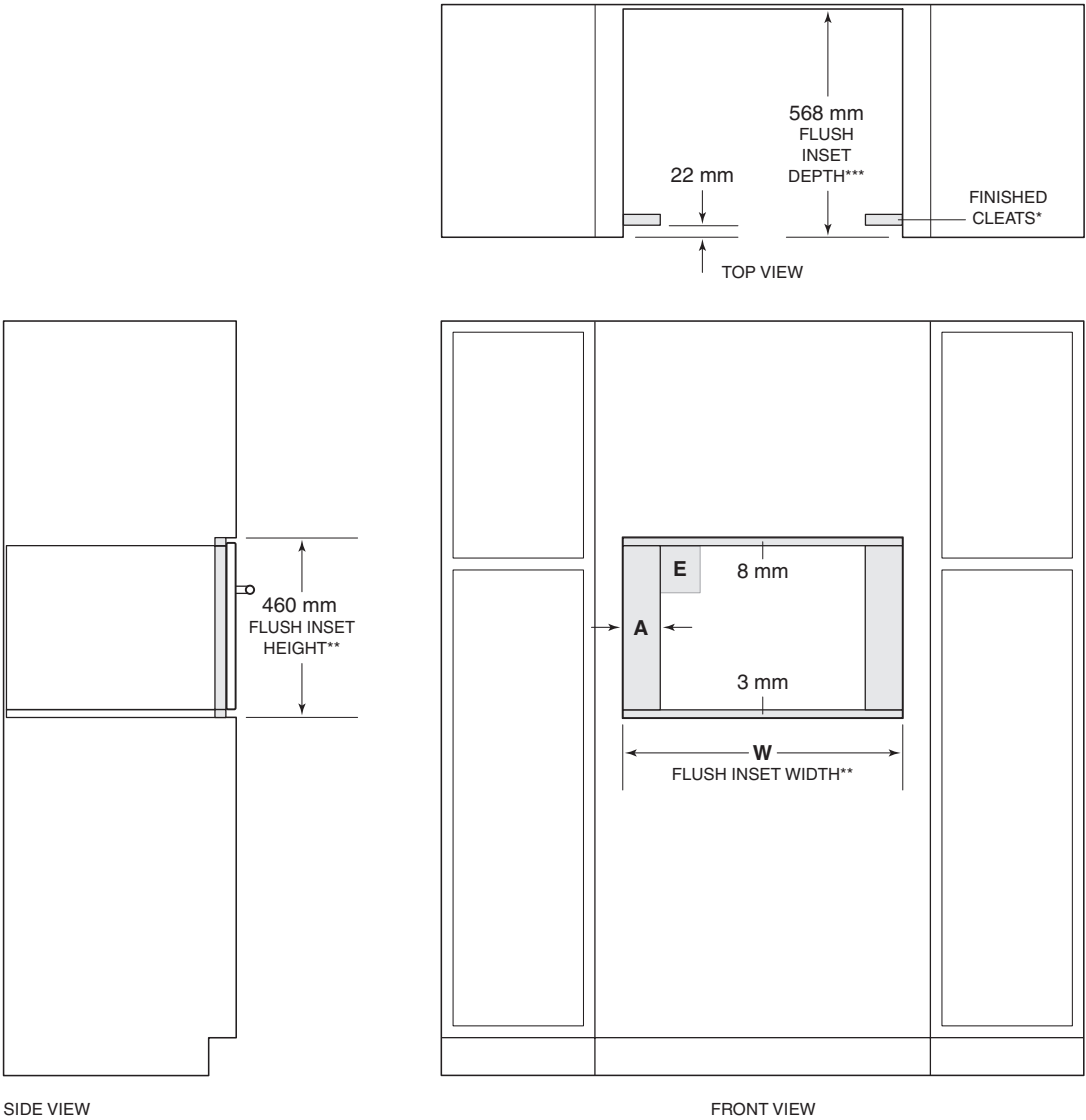

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
***Does not include additional depth for the electrical connection.

FLUSH INSET WIDTH	W	A
60 cm Model	603 mm	21 mm
76 cm Model	765 mm	102 mm

Microwave Ovens


As true cooking instruments, Wolf microwave ovens have features that make fast meals better meals. The new drop-down door microwaves feature a door that hinges at the bottom. Drop-down door microwaves are designed to match Wolf transitional, professional, and contemporary products. Microwave ovens can be installed in a standard or flush inset application.

DROP-DOWN DOOR MICROWAVES

TRANSITIONAL



ICBMDD24TE/S/TH




ICBMDD30TM/S/TH



ICBMDD30TE/S/TH

PROFESSIONAL



ICBMDD30PM/S/PH



ICBMDD30PE/S/PH

CONTEMPORARY





ICBMDD30CM/B/TH

MICROWAVE OVENS



Drop-Down Door Microwave Ovens

TRANSITIONAL

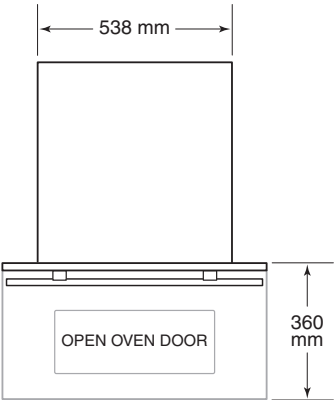
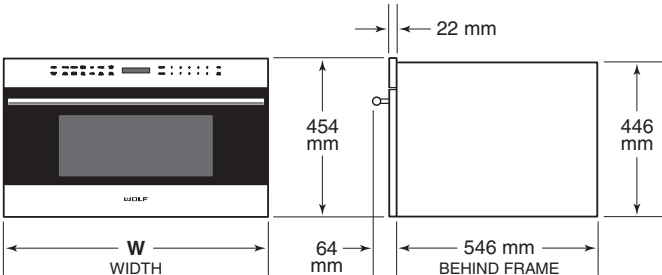


WIDTH	W
60 cm Model	597 mm
76 cm Model	759 mm

PROFESSIONAL

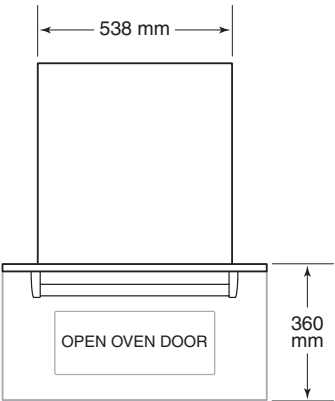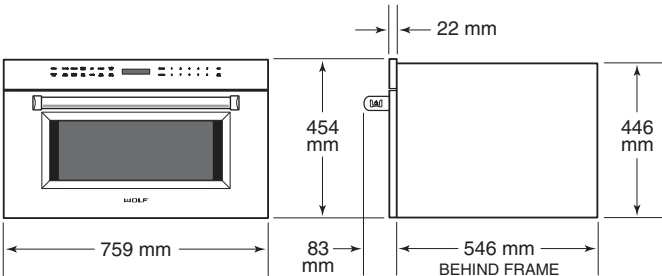

CONTEMPORARY

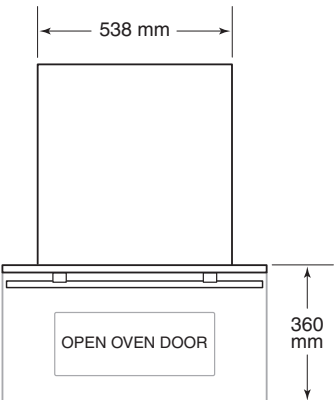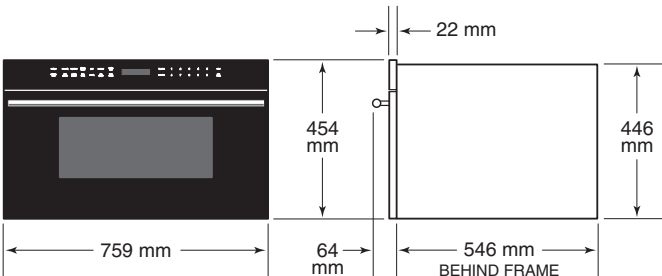

Planning Information

DROP-DOWN DOOR MICROWAVE

The drop-down door microwave oven can be installed in a standard or flush inset application.

Finish the edges of the opening. They may be visible when the door is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Drop-Down Door Microwave		57 kg
TRIM OVERLAP	60 cm MODEL	76 cm MODEL
Top	5 mm	5 mm
Bottom	0 mm	0 mm
Sides	18 mm	98 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).


Locate the electrical supply as shown in the illustrations on the following pages. The receptacle may also be located in an adjacent cabinet within reach of the power cord. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50/60 Hz
Service	1600 W
Receptacle	grounding-type (earthed)
Power Cord	1.2 m

Drop-Down Door Microwave Oven

STANDARD INSTALLATION

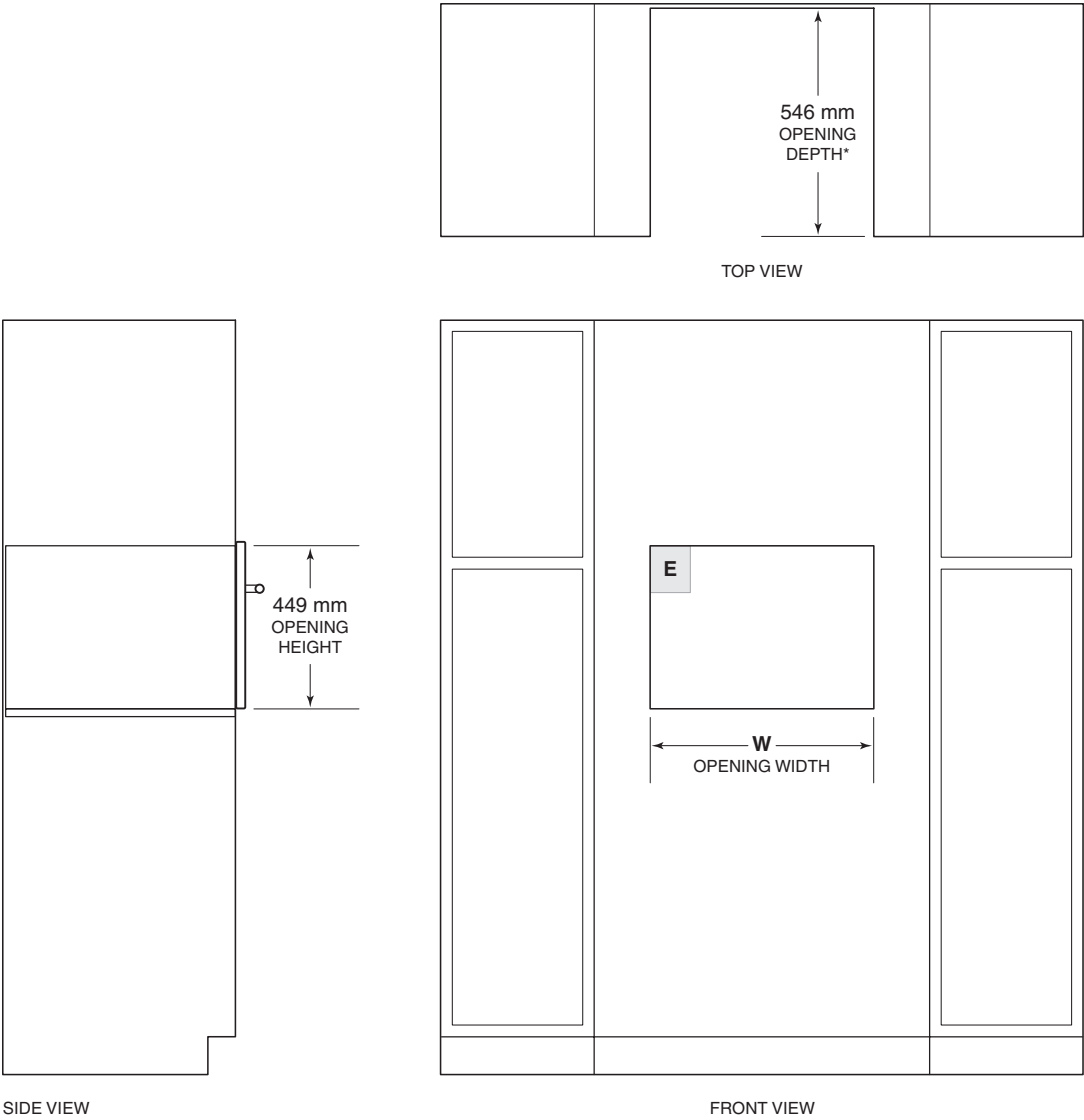


**Does not include additional depth for the electrical connection.
NOTE: Both 60 cm and 76 cm models require the same opening dimensions.*

OPENING WIDTH	W
60 cm Model	562 mm
76 cm Model	562 mm

Drop-Down Door Microwave Oven

FLUSH INSET INSTALLATION

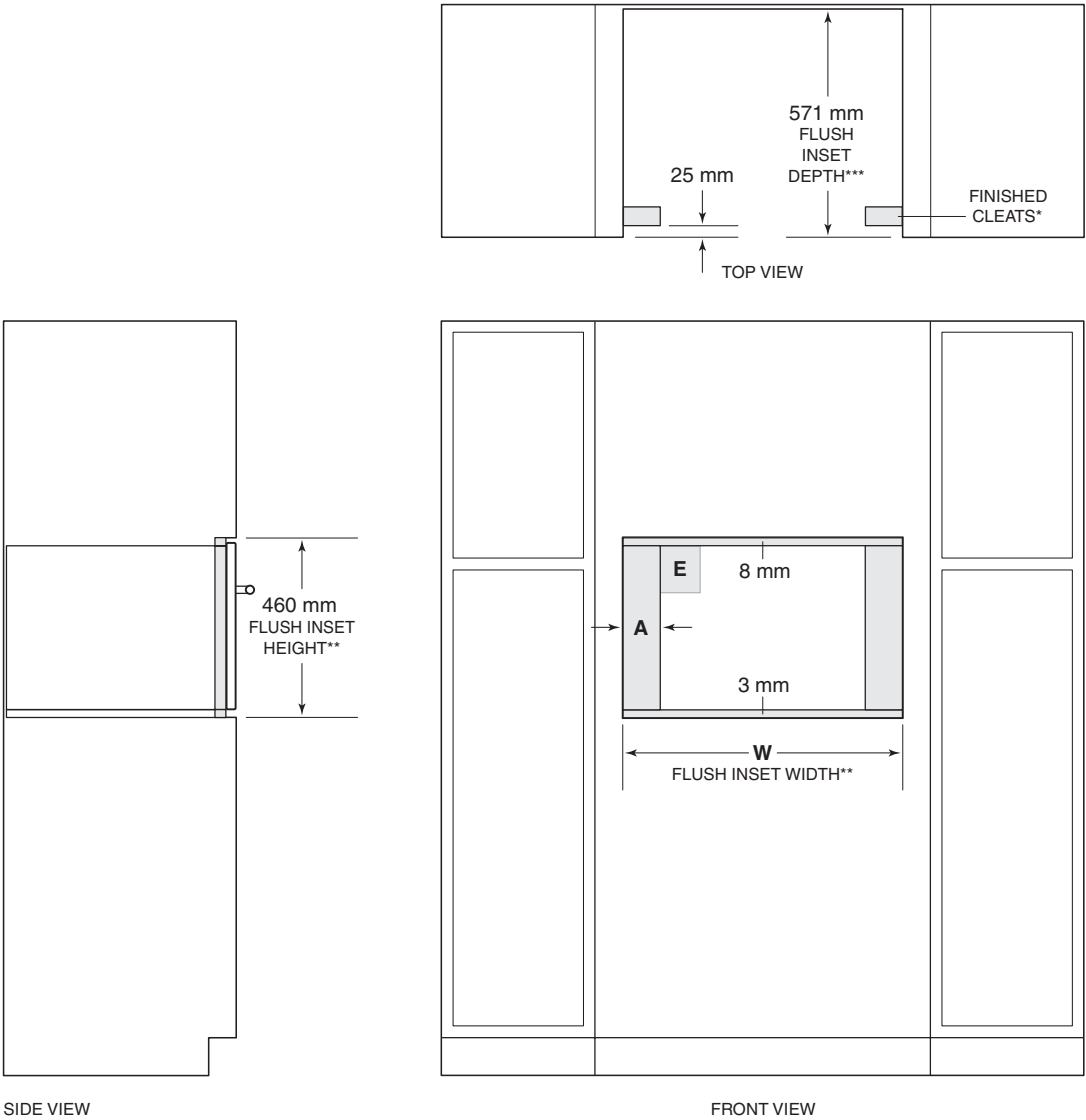

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
***Does not include additional depth for the electrical connection.

FLUSH INSET WIDTH	W	A
60 cm Model	603 mm	21 mm
76 cm Model	765 mm	102 mm

Warming Drawers

Wolf warming drawers are designed to take care of prepared foods until it is time to serve them. You can adjust the temperature, keeping moist foods moist and crisp foods crisp. Warming drawers are ideal for proofing dough. Drawer fronts are available to match the look of Wolf ovens and sealed burner rangetops. The integrated drawer front allows for a custom panel and handle.

WARMING DRAWER FRONTS

M/E SERIES



TRANSITIONAL



PROFESSIONAL



CONTEMPORARY

INTEGRATED



CUSTOM PANEL


Warming Drawers

DRAWER FRONT OPTIONS

Wolf warming drawer fronts allow for many design options, but the warming drawer itself will be the same for all applications. A panel mounting kit is required when installing a custom panel. The panel mounting kit is available through an authorized Wolf dealer.

The 51 mm thick drawer front, in 76 cm and 91 cm widths, is designed to be installed below a sealed burner rangetop, so the panel aligns properly with the front of the rangetop. Dimensions for the warming drawer remain the same, even though the drawer front may be wider to match a Wolf 91 cm oven or sealed burner rangetop.

DIMENSIONS

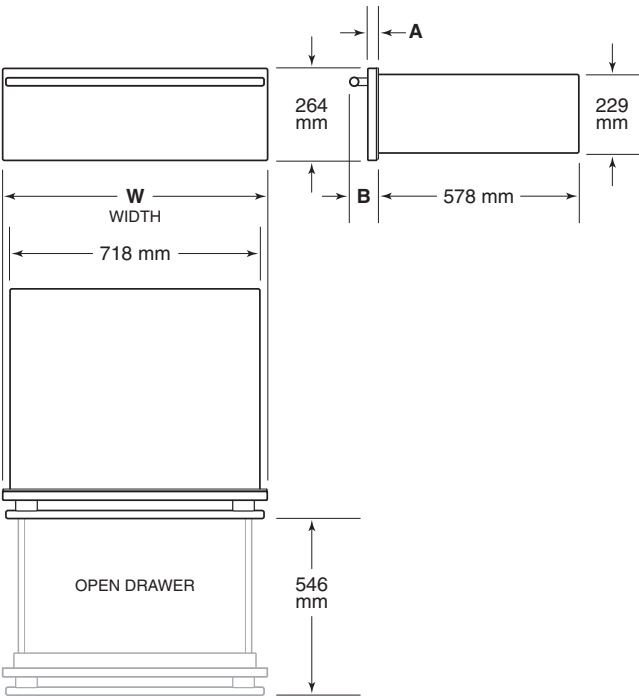

DRAWER FRONT

MODEL	W	
76 cm Drawer Front	759 mm	
91 cm Drawer Front	911 mm	
M SERIES	A	B
Transitional / Professional	22 mm	83 mm
Contemporary	25 mm	86 mm
E SERIES	A	B
Transitional / Professional	29 mm	89 mm
Professional (51 mm thick)	54 mm	114 mm
Contemporary	35 mm	95 mm

INTEGRATED DRAWER FRONT

CUSTOM PANEL	W	H	D
Typical Dimensions	759 mm	264 mm	19 mm
Min Thickness			16 mm

Planning Information

The warming drawer must be installed with a Wolf drawer front, available through an authorized Wolf dealer. Specific installation instructions are included with the drawer front.

The warming drawer can be installed in a standard or flush inset application.

For a standard installation, the drawer collar and front panel sit proud of the cabinet face frame. A recessed installation requires the cabinetry be recessed by 5 mm so the collar is flush with the cabinet face frame but the drawer front will sit proud. A flush inset installation requires the drawer collar and front panel be recessed to be flush with surrounding cabinetry. Refer to the illustrations on the following pages for minimum cabinet dimensions for your specific installation.

Finish the edges of the opening. They may be visible when the drawer is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Warming Drawer		90 kg
TRIM OVERLAP		
Top, Bottom and Sides		16 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply flush with the back wall and within the shaded area shown in the illustrations on the following pages. For ease of installation, the electrical supply for the warming drawer can be placed in an adjacent cabinet within reach of the power cord.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50/60 Hz
Service	850 W
Receptacle	grounding-type (earthed)
Power Cord	.9 m

WARMING DRAWERS

Warming Drawer

STANDARD INSTALLATION




NOTE: Location of electrical supply within opening may require additional cabinet depth.

WARMING DRAWERS

Warming Drawer

FLUSH INSET INSTALLATION

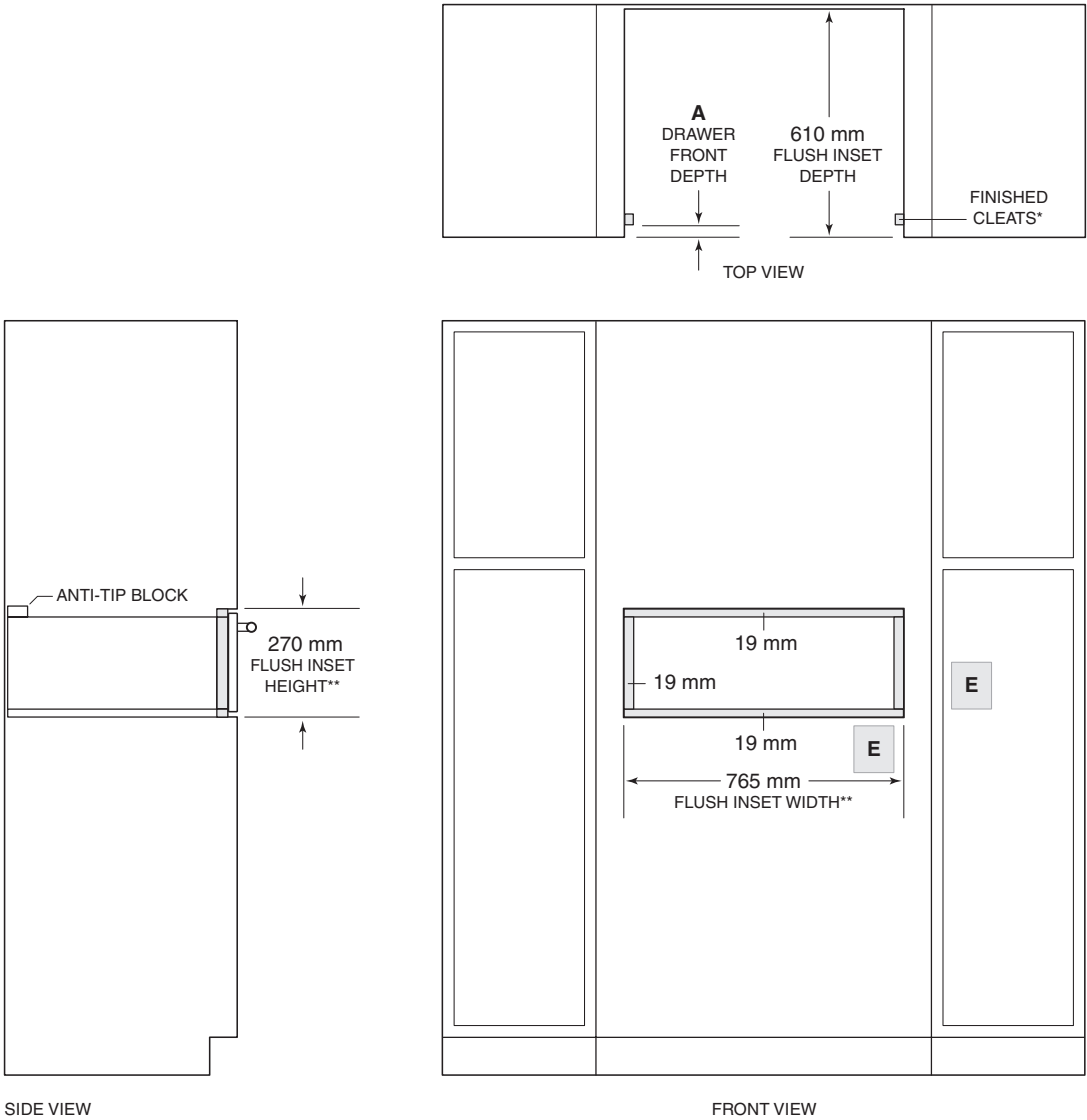

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
NOTE: Location of electrical supply within opening may require additional cabinet depth.

DRAWER FRONT DEPTH (A)	M SERIES	E SERIES
Transitional / Professional	22 mm	29 mm
Professional (51 mm thick)	NA	54 mm
Contemporary	25 mm	35 mm

Custom front panel depth is dependent on panel thickness.


Induction Cooktops

Almost instantaneous temperature response. Practically no wasted heat. Induction cooking has been popular among European chefs and homeowners for decades. Now Wolf leads the way in bringing this remarkable technology to North American kitchens. Its secret is magnetism. Electro-magnetic elements cause iron and magnetic stainless cookware to heat up instantly and with perfectly distributed heat. Heat generation stops the instant you turn off the element or remove the pan. The cooktop's surface remains cool. Your kitchen stays cooler too. Transitional models have a brushed stainless steel trim. Contemporary models can be mounted flush with the countertop.


The following models have the same stainless steel frame as our module cooktops for paired installations: ICBCI243TF/S, ICBCI304TF/S, and ICBCI365TF/S.

INDUCTION COOKTOPS


TRANSITIONAL



ICBCI243TF/S




ICBCI304TF/S




ICBCI365TF/S


CONTEMPORARY



ICBCI243C/B




ICBCI304C/B




ICBCI365C/B

Induction Cooktops


60 cm TRANSITIONAL

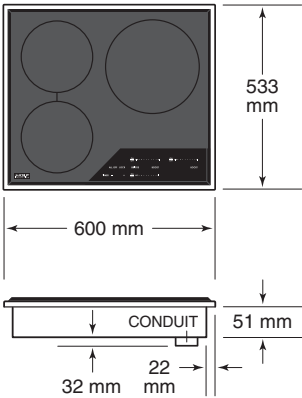


76 cm TRANSITIONAL

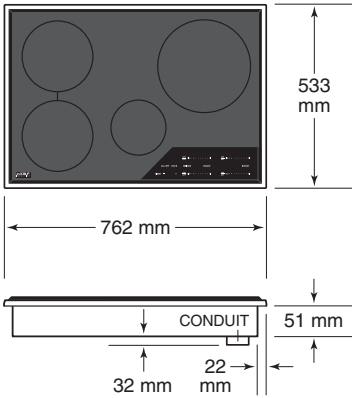


91 cm TRANSITIONAL

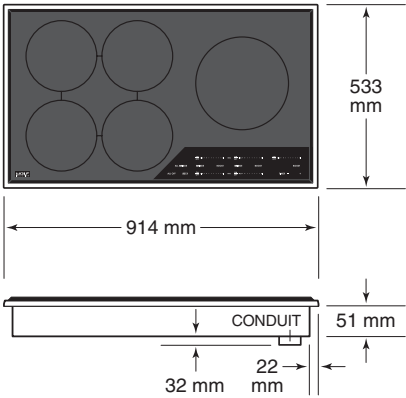


60 cm CONTEMPORARY

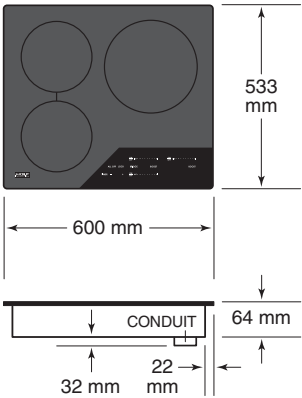

76 cm CONTEMPORARY

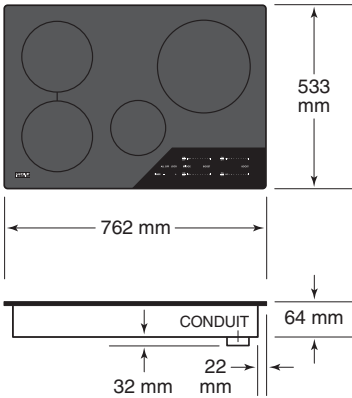

91 cm CONTEMPORARY

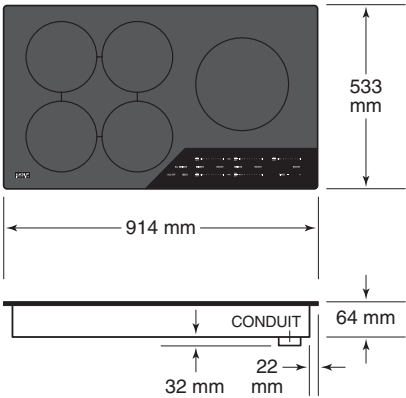

Induction Cooktops

ELEMENT RATING		
60 cm COOKTOP		
		W
279 mm	2600 / 3150 boost	
203 mm	2100 / 3000 boost	
203 mm	2100	
76 cm COOKTOP		
		W
279 mm	2600 / 3150 boost	
203 mm	2100 / 3000 boost	
203 mm	2100	
152 mm	1400	
91 cm COOKTOP		
		W
279 mm	2600 / 3700 boost	
(2) 203 mm	2100 / 3000 boost	
(2) 203 mm	2100	

Planning Information

A minimum height clearance of 159 mm is required from the top of the countertop to any combustible surface directly below the cooktop.

Contemporary induction cooktops can be mounted flush with the top of the countertop, or as a frameless standard installation sitting on top of the countertop surface. If the cooktop is to be mounted flush with the countertop, a recessed area surrounding the cooktop cutout must be provided.

IMPORTANT NOTE: Flush mount installations are intended for granite, solid surface, or stone countertop surfaces only.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required.

Performance may be compromised if the electrical supply is less than 220 volts.

The cooktop is supplied with a single phase and 3-phase convertible power inlet box.


ELECTRICAL REQUIREMENTS

INDUCTION COOKTOPS	SINGLE PHASE	3-PHASE
Required Power Supply	220-240 V AC 50/60 Hz	380-415 V AC 50 Hz
TOTAL AMPS	SINGLE PHASE	3-PHASE
60 cm Induction	30	16
76 cm Induction	32	16
91 cm Induction	48	16

INDUCTION COOKTOPS

60 cm / 76 cm / 91 cm Induction Cooktop

STANDARD INSTALLATION

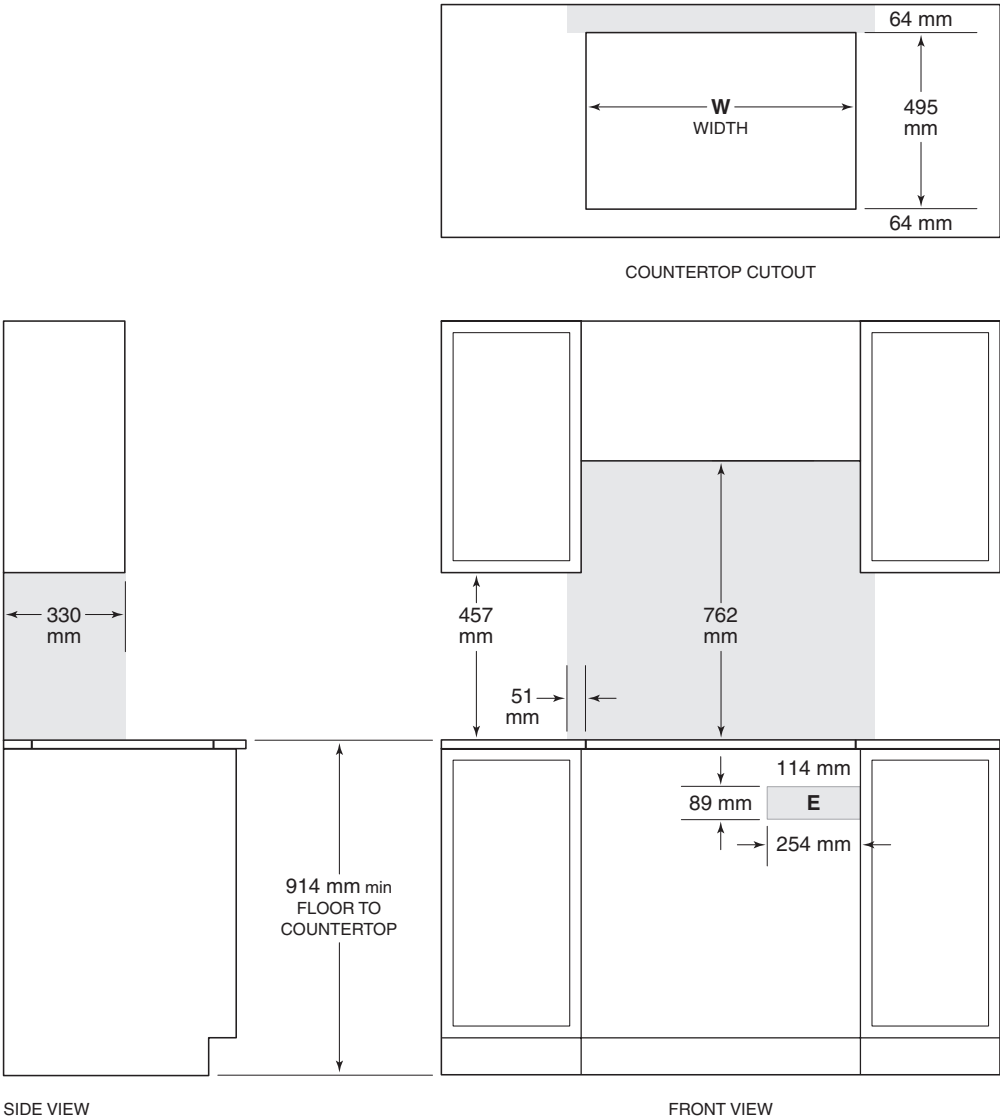


NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical supply location only applies to installations with built-in oven.

CUTOUT WIDTH	W
60 cm Cooktop	562 mm
76 cm Cooktop	737 mm
91 cm Cooktop	889 mm

60 cm / 76 cm / 91 cm Induction Cooktop

FLUSH INSTALLATION

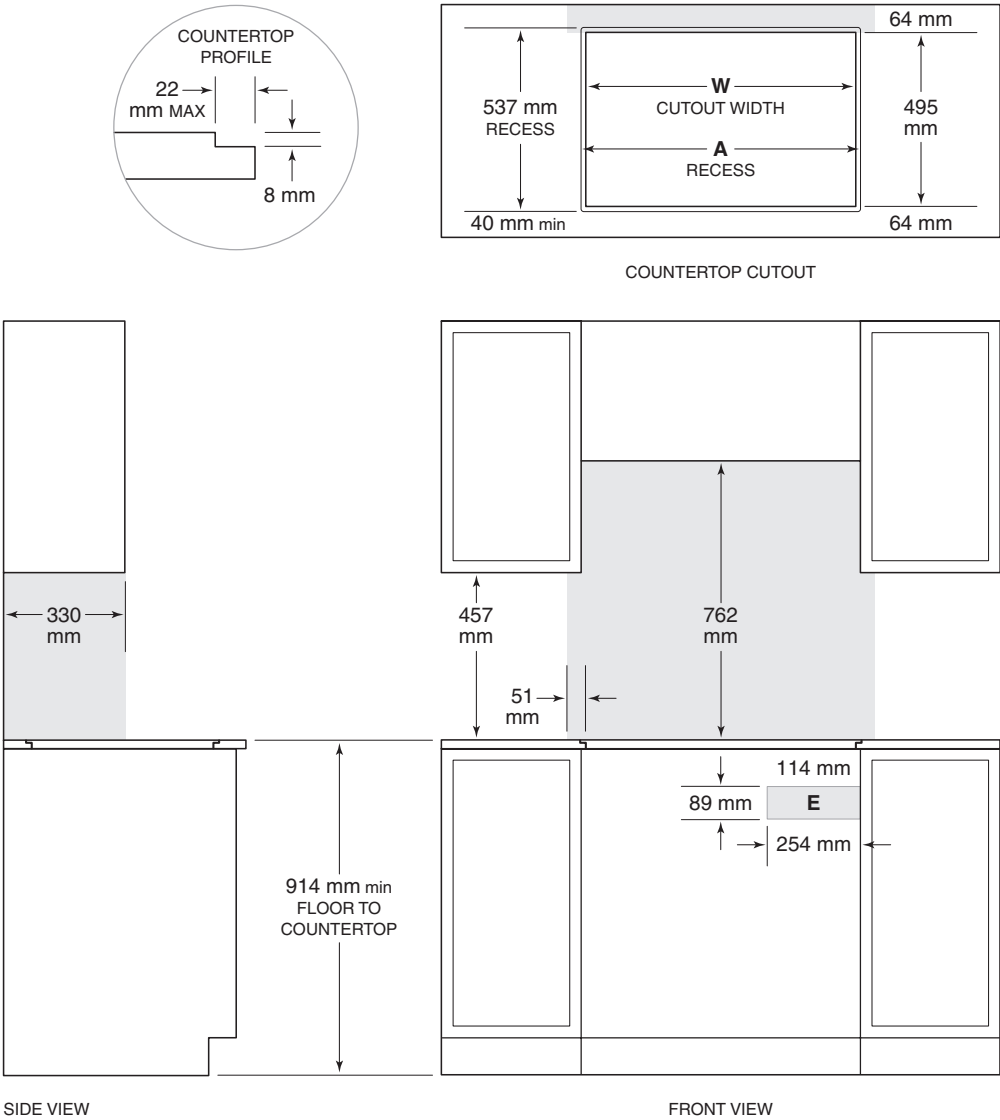

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical supply location only applies to installations with built-in oven.
Outside corner radius 11 mm.


CUTOUT WIDTH	W	A
60 cm Cooktop	562 mm	603 mm
76 cm Cooktop	737 mm	765 mm
91 cm Cooktop	889 mm	918 mm

Gas Cooktops


Like their oven counterparts, the new generation of Wolf gas cooktops features two new looks—transitional and professional. New performance enhancements make delicious results even more of a certainty than ever. Multiple sizes, choice of knob colors, and distinctly different grates—the new gas cooktops offer exceptional design flexibility.

GAS COOKTOPS

TRANSITIONAL




ICBCG304T/S




ICBCG365T/S

PROFESSIONAL




ICBCG304P/S




ICBCG365P/S

Gas Cooktops


76 cm TRANSITIONAL

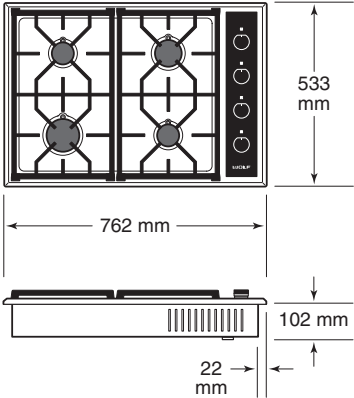


91 cm TRANSITIONAL

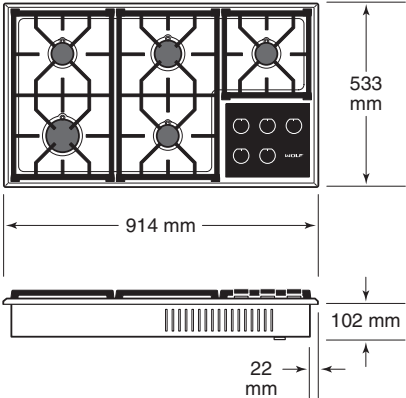

76 cm PROFESSIONAL

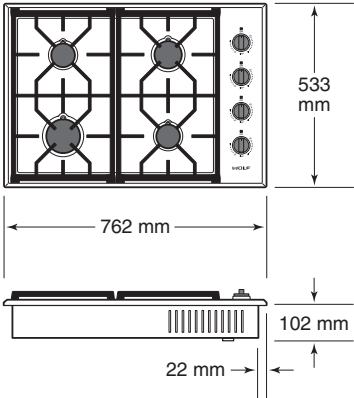

91 cm PROFESSIONAL

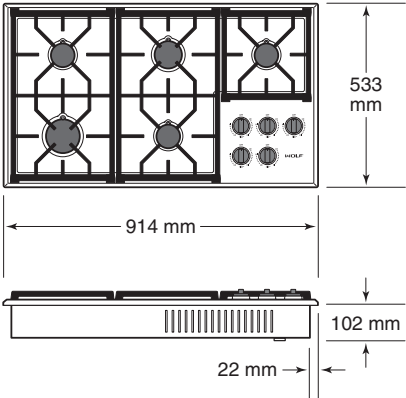

Gas Cooktops

BURNER RATING	
76 cm COOKTOP	kW
Large	5.3
Medium	3.5
(2) Small	2.7
91 cm COOKTOP	kW
Large	5.3
Medium	3.5
(3) Small	2.7

Planning Information

A minimum 51 mm is required from the bottom of the cooktop to combustible materials. If a cooktop is installed above an oven, a minimum of 6 mm is required between the units.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustration on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50/60 Hz
Service	0.2 A
Receptacle	grounding-type (earthed)
Power Cord	1.8 m

GAS SUPPLY

Installation must conform with all applicable gas codes.

A gas supply line of 19 mm rigid pipe must be provided to the cooktop. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible metal appliance connector is recommended to connect the units 1/2" NPT (or ISO 7/1-14) male inlet to the gas supply line.

The gas cooktops contain a regulator for natural gas and LP gas.


Wolf natural gas cooktops will function up to 3124 m in altitude without adjustment and LP gas cooktops will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

GAS REQUIREMENTS


NATURAL GAS		WC
Supply Pressure		12.5 mbar
LP GAS		WC
Supply Pressure		25 mbar

76 cm / 91 cm Cooktop


STANDARD INSTALLATION

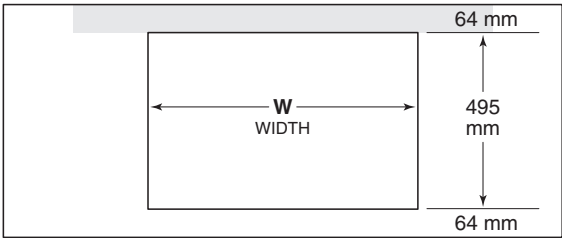

COUNTERTOP CUTOUT

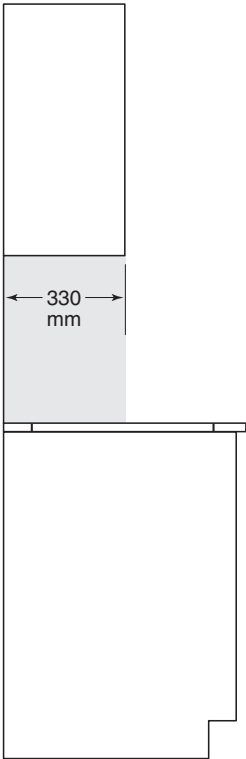

SIDE VIEW

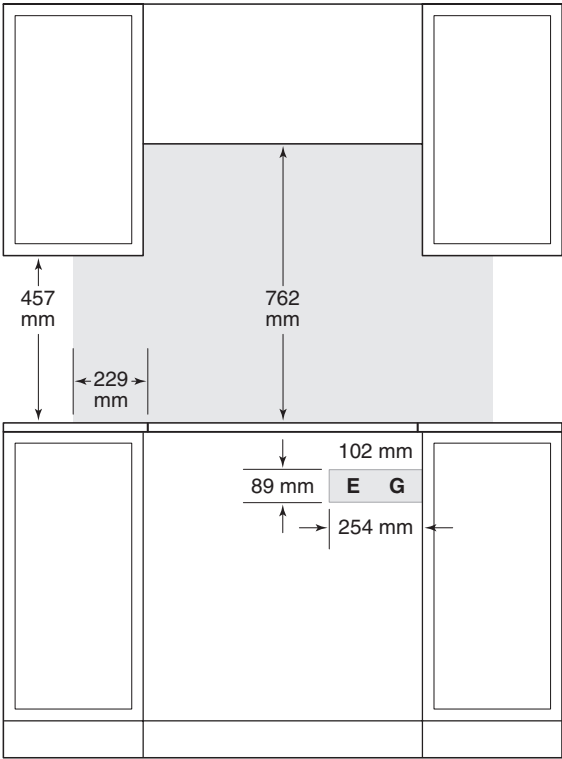

FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical and gas supply location only applies to installations with built-in oven.

CUTOUT WIDTH	W
76 cm Cooktop	737 mm
91 cm Cooktop	889 mm

Module Cooktops

Wolf 38 cm modules have been redesigned to match the updated lines of Sub-Zero and Wolf. Controls, grates, and trim allow them to integrate perfectly with their larger counterparts and deliver equal performance. Combine modules à la carte-style to create a custom cooktop, or add specialty functions alongside an existing cooktop.

Full-size cooktops including ICBCI243TF/S, ICBCI304TF/S, and ICBCI365TF/S feature the same brushed stainless frame, making them ideal for pairing with modules.

MODULE COOKTOPS



ICBCI152TF/S
INDUCTION



ICBSM15TF/S
STEAMER



ICBGM15TF/S
GRILL



ICBTM15TF/S
TEPPANYAKI




ICBCG152TF/S
GAS




ICBMM15TF/S
MULTIFUNCTION

Module Cooktops


INDUCTION

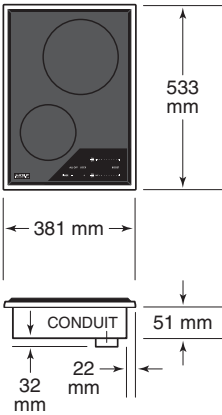


STEAMER

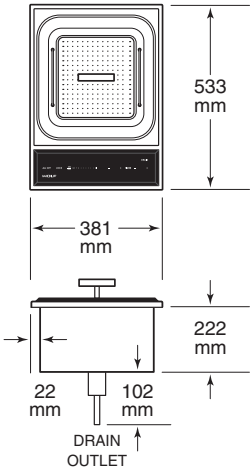


GRILL

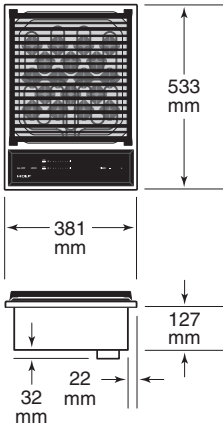


TEPPANYAKI

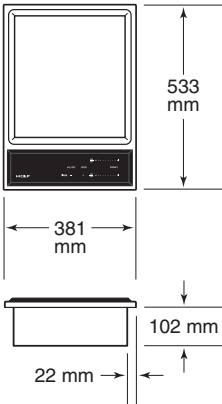

GAS

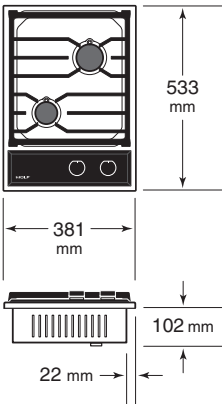

MULTIFUNCTION

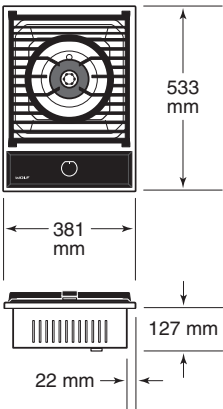

Planning Information

IMPORTANT NOTE: Wolf does not recommend the use of downdraft ventilation with the steamer or grill modules.

A minimum 51 mm is required from the bottom of the module to combustible materials. For the Teppanyaki module, a minimum 22 mm is required from the bottom of the unit to any material.


Refer to the illustrations on the following pages for installation of modules.

MULTIPLE COOKTOPS

When multiple modules are installed side by side, refer to the chart and illustration below for typical configurations. The cutout dimensions provided will accommodate the use of an optional filler strip if desired.

COUNTERTOP CUTOUT	W*
(2) 38 cm Modules	737 mm
(3) 38 cm Modules	1118 mm
(4) 38 cm Modules	1505 mm
(5) 38 cm Modules	1886 mm
(6) 38 cm Modules	2267 mm

**Dimensions apply to ICBCI152TF/S, ICBCE152TF/S, ICBCG152TF/S, ICBSM15TF/S, ICBGM15TF/S, ICBTM15TF/S and ICBMM15TF/S.*

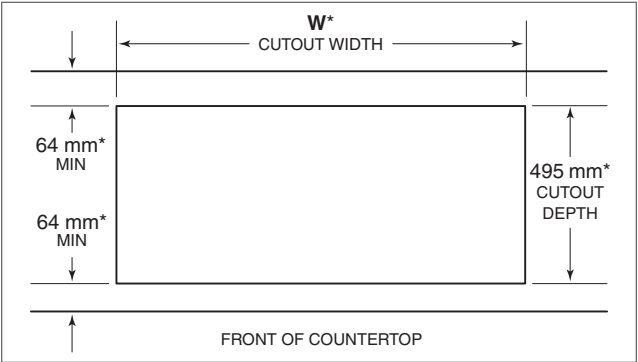

Countertop cutout

Planning Information

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required.

The induction cooktop is supplied with a single phase and 3-phase convertible power inlet box.

When multiple cooktops or modules are installed side by side, each must have its own separate electrical supply.

ELECTRICAL REQUIREMENTS

INDUCTION MODULE

Single Phase	220-240 VAC, 50/60 Hz
3-Phase	380-415 V AC 50 Hz
Total Amps	16

ELECTRIC MODULES

Electrical Supply	220-240 VAC, 50/60 Hz
Steamer, Teppanyaki	2700 W
Grill	2800 W

GAS MODULES

Electrical Supply	220-240 VAC; 50/60 Hz
Service	0.2 A
Receptacle	grounding-type (earthed)
Power Cord	1.8 m

DRAIN OUTLET

The steamer module requires a method for draining hot water. Options include connecting a drain hose from the 16 mm outlet tied into an existing drain, a separate drain with freefall, or placing a heat-resistant receptacle under the drain outlet.

GAS SUPPLY

Installation must conform with all applicable gas codes.

For gas modules, a gas supply line of 19 mm rigid pipe must be provided to the module. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible metal appliance connector is recommended to connect the units 1/2" NPT (or ISO 7/1-14) male inlet to the gas supply line.

When multiple gas cooktops or modules are installed side by side, they can receive their gas supply from a common line. However, each unit must have its own regulator installed between the mainline and the cooktop or module.


Wolf natural gas cooktops will function up to 3124 m in altitude without adjustment and LP gas cooktops will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

GAS REQUIREMENTS


NATURAL GAS	WC
Supply Pressure	25 mbar
LP GAS	WC
Supply Pressure	37 mbar

Induction Module

STANDARD INSTALLATION

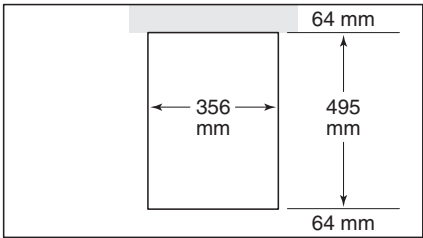

COUNTERTOP CUTOUT

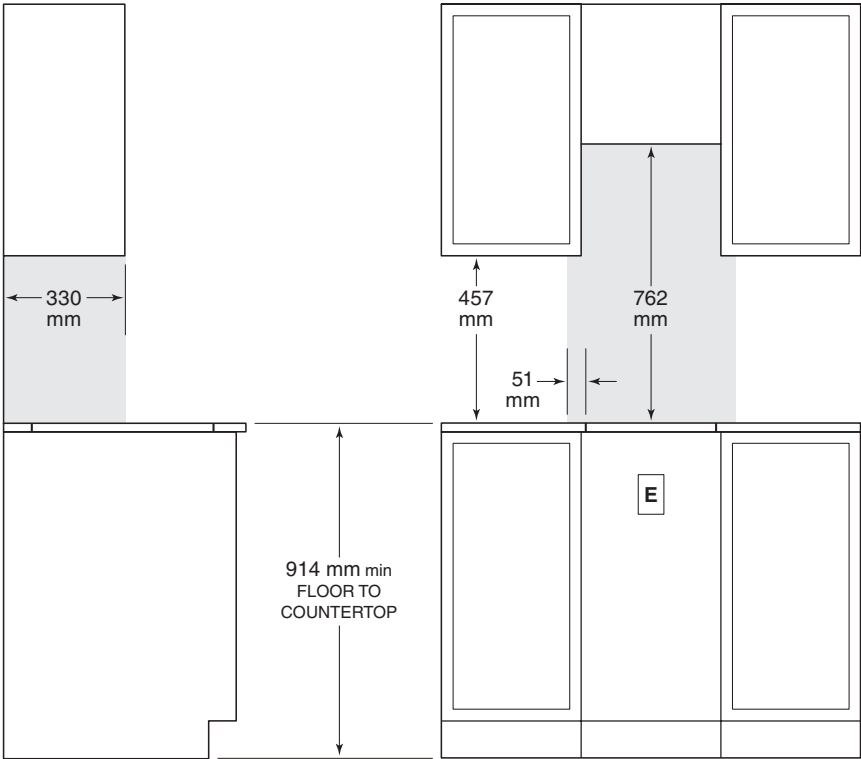


SIDE VIEW

FRONT VIEW


NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Steamer Module


STANDARD INSTALLATION

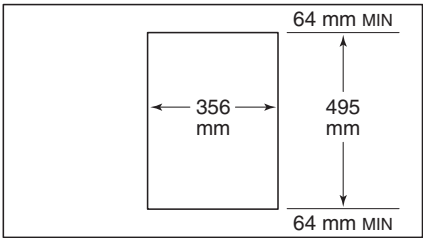

COUNTERTOP CUTOUT

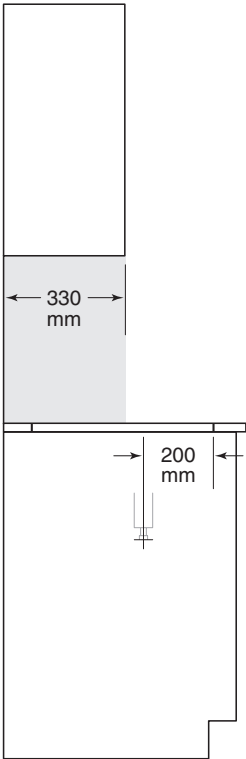

SIDE VIEW

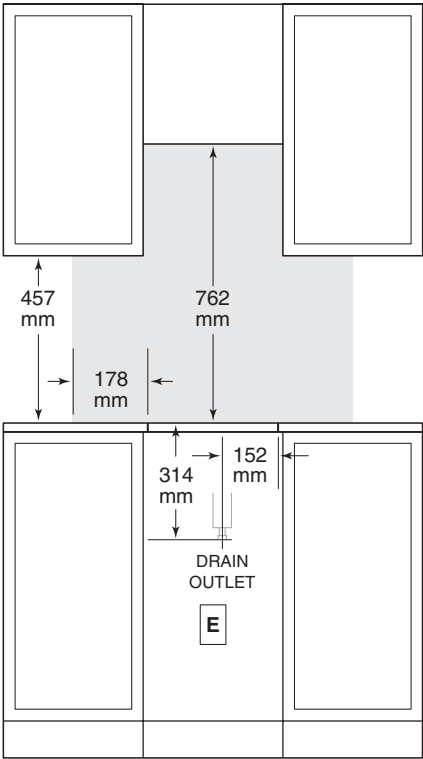


FRONT VIEW


NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Grill / Teppanyaki Module


STANDARD INSTALLATION

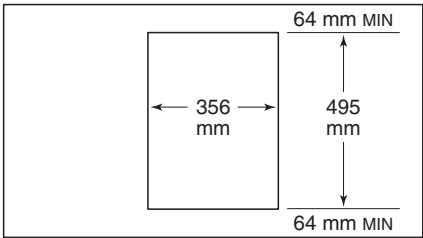

COUNTERTOP CUTOUT

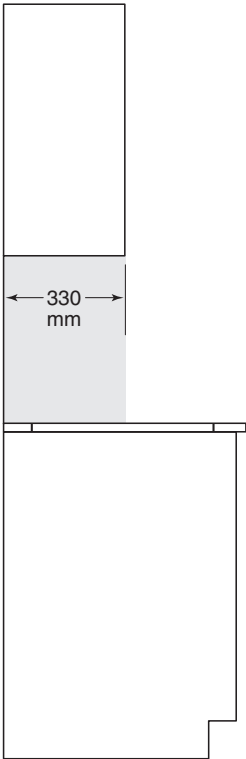

SIDE VIEW

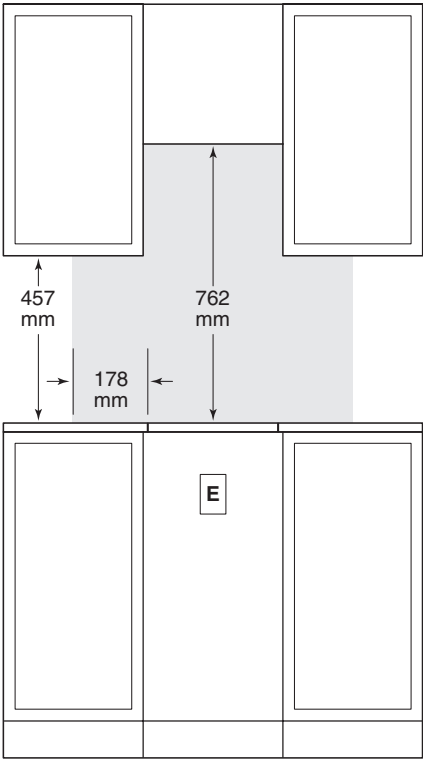


FRONT VIEW


NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Gas / Multifunction Module


STANDARD INSTALLATION

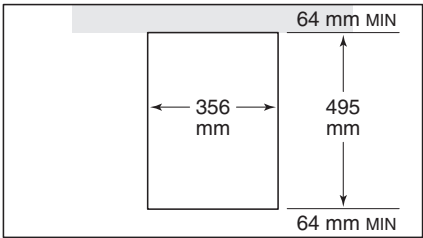

COUNTERTOP CUTOUT

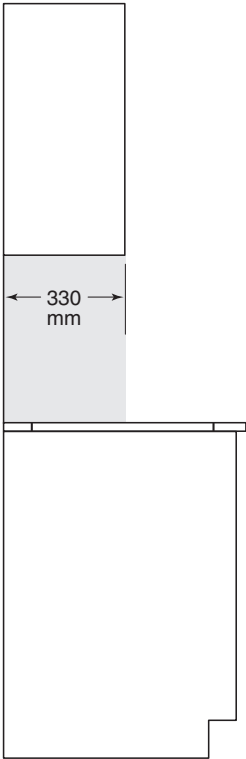

SIDE VIEW

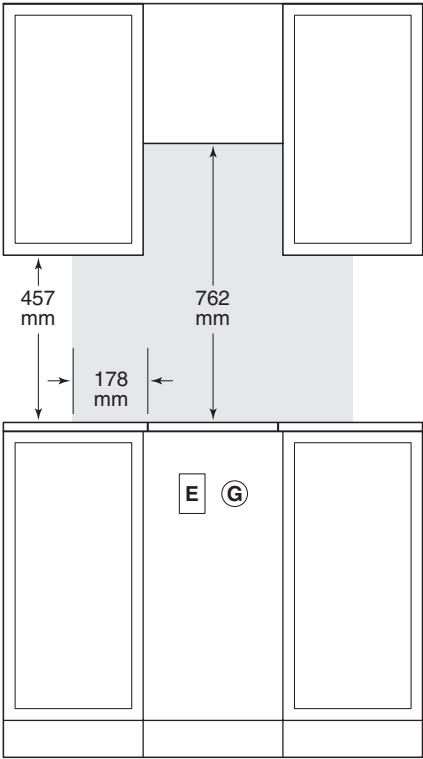

FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

Coffee Systems

Make professional-quality coffee, espresso, cappuccino, latte, and more. The Wolf coffee system automatically steams and foams the milk perfectly. The water temperature and brew strength are adjustable. It uses either whole-bean or ground coffee. The design pairs beautifully, either side-by-side or in a tower application, with other Wolf products such as the convection steam oven. Coffee systems can be installed in a standard or flush inset application. All 76 cm trim options are based on model ICBEC24/B.

COFFEE SYSTEMS

60 cm MODELS



ICBEC24/B




ICBEC24/S

TRANSITIONAL



76 cm M SERIES TRIM




76 cm E SERIES TRIM

PROFESSIONAL



76 cm M SERIES TRIM



76 cm E SERIES TRIM


CONTEMPORARY



76 cm M / E SERIES TRIM

Coffee System

DIMENSIONS

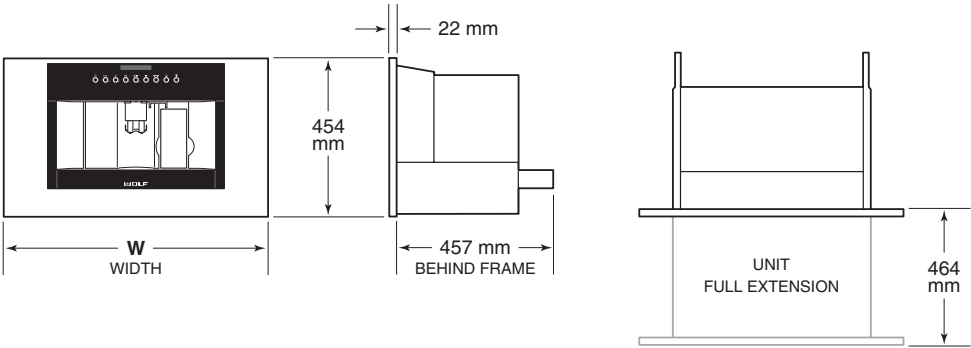

WIDTH	W
60 cm Model	597 mm
76 cm Trim	759 mm

Planning Information

The coffee system can be installed in a standard or flush inset application. All 76 cm trim options are based on model ICBEC24/B. The sides of the cabinetry opening must be adequate to support installation of the mounting slides. Refer to the illustration below.

Finish the edges of the opening. They may be visible when the unit is slid forward.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Coffee System		45 kg
TRIM OVERLAP	60 cm MODEL	76 cm TRIM
Top	5 mm	5 mm
Bottom	0 mm	0 mm
Sides	18 mm	98 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).


Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50/60 Hz
Service	1350 W
Receptacle	grounding-type (earthed)
Power Cord	1.8 m

COMBINATION INSTALLATION

To install a coffee system above a cup warming drawer, one opening for both units must be specified. To achieve the minimum reveal between units, place the coffee system support rails on top of the cup warming drawer, then secure the rails to the sides of the cabinet. Any material between the units will increase the horizontal reveal.

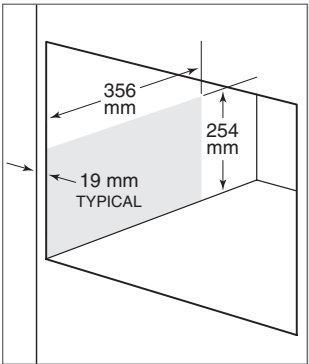

Side support

Coffee System

STANDARD INSTALLATION




NOTE: 60 cm model and model with 76 cm trim require the same opening dimensions.

OPENING WIDTH	W
60 cm Model	562 mm
76 cm Trim	562 mm

Coffee System

FLUSH INSET INSTALLATION

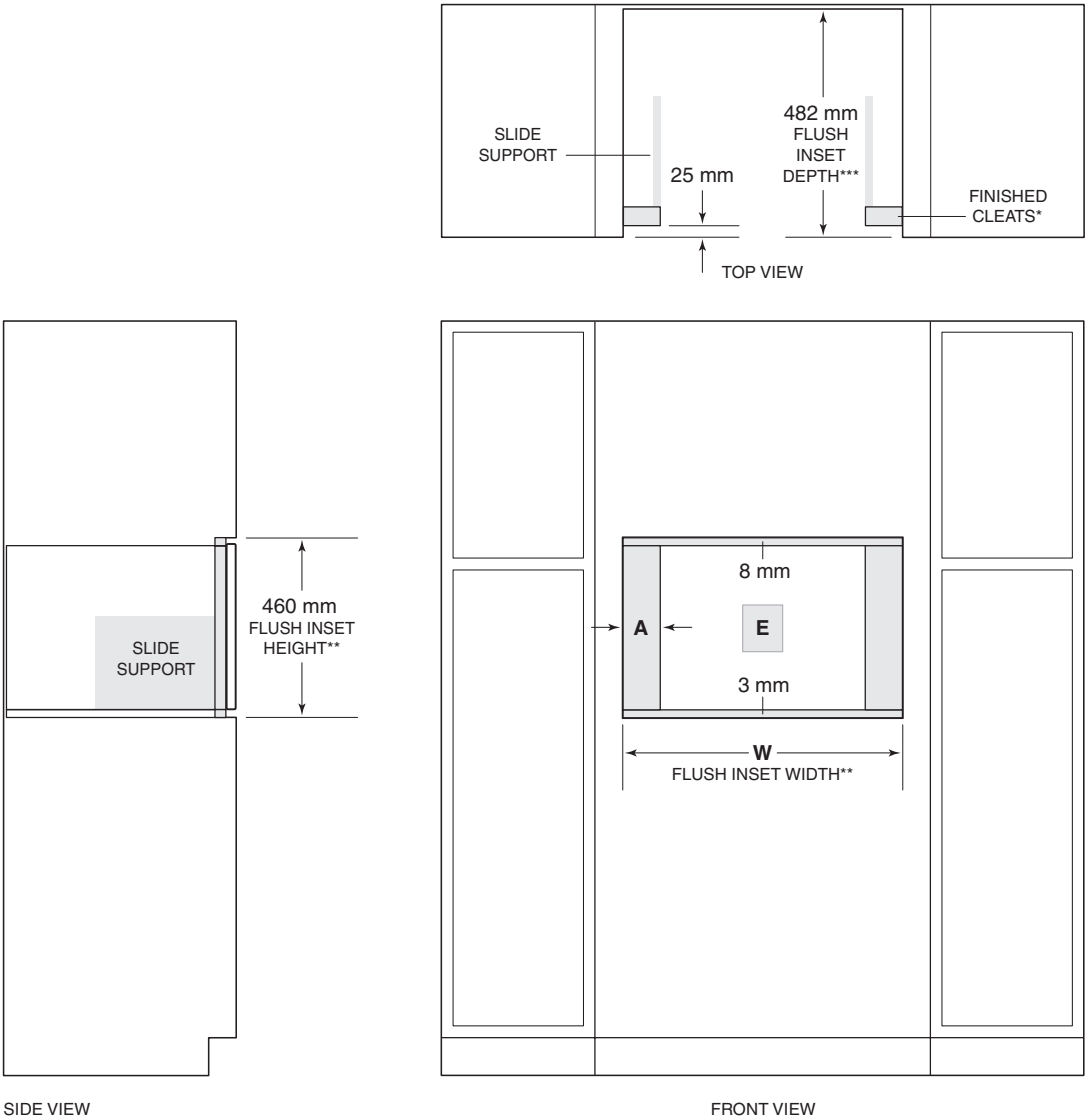

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
***Does not include additional depth for the electrical connection.

FLUSH INSET WIDTH	W	A
60 cm Model	603 mm	21 mm
76 cm Trim	765 mm	102 mm

Cup Warming Drawers


Wolf cup warming drawers preheat cups so hot beverages stay hot longer. The temperature is adjustable. Two model options match the look of Wolf stainless and black coffee systems. Cup warming drawers can be installed in a standard or flush inset application.

CUP WARMING DRAWERS


ICBCW24/S
STAINLESS


ICBCW24/B
BLACK

DIMENSIONS

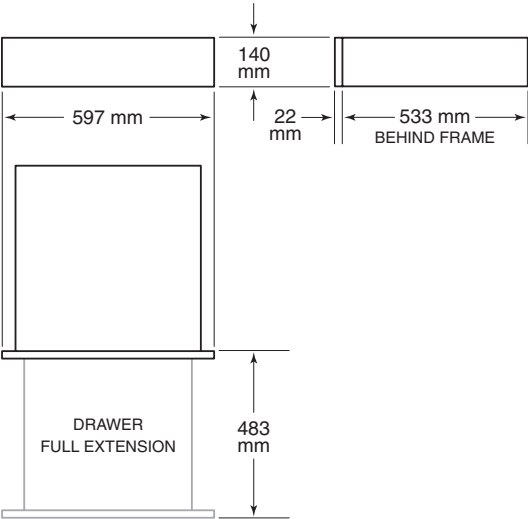

Planning Information

The cup warming drawer can be installed in a standard or flush inset application. Finish the edges of the opening. They may be visible when the drawer is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

An anti-tip block must be installed to prevent the cup warming drawer from tipping forward when opened.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Cup Warming Drawer		34 kg
TRIM OVERLAP		
Top		0 mm
Bottom		0 mm
Sides		18 mm

COMBINATION INSTALLATION

To install a cup warming drawer below a coffee system, one opening for both units must be specified. To achieve the minimum reveal between units, place the coffee system support rails on top of the cup warming drawer, then secure the rails to the sides of the cabinet. Any material between the units will increase the horizontal reveal.

Installation of an anti-tip block is not necessary when the cup warming drawer is installed below a coffee system.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.


ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50/60 Hz
Service	550 W
Receptacle	grounding-type (earthed)
Power Cord	.9 m

CUP WARMING DRAWER

Cup Warming Drawer


STANDARD INSTALLATION

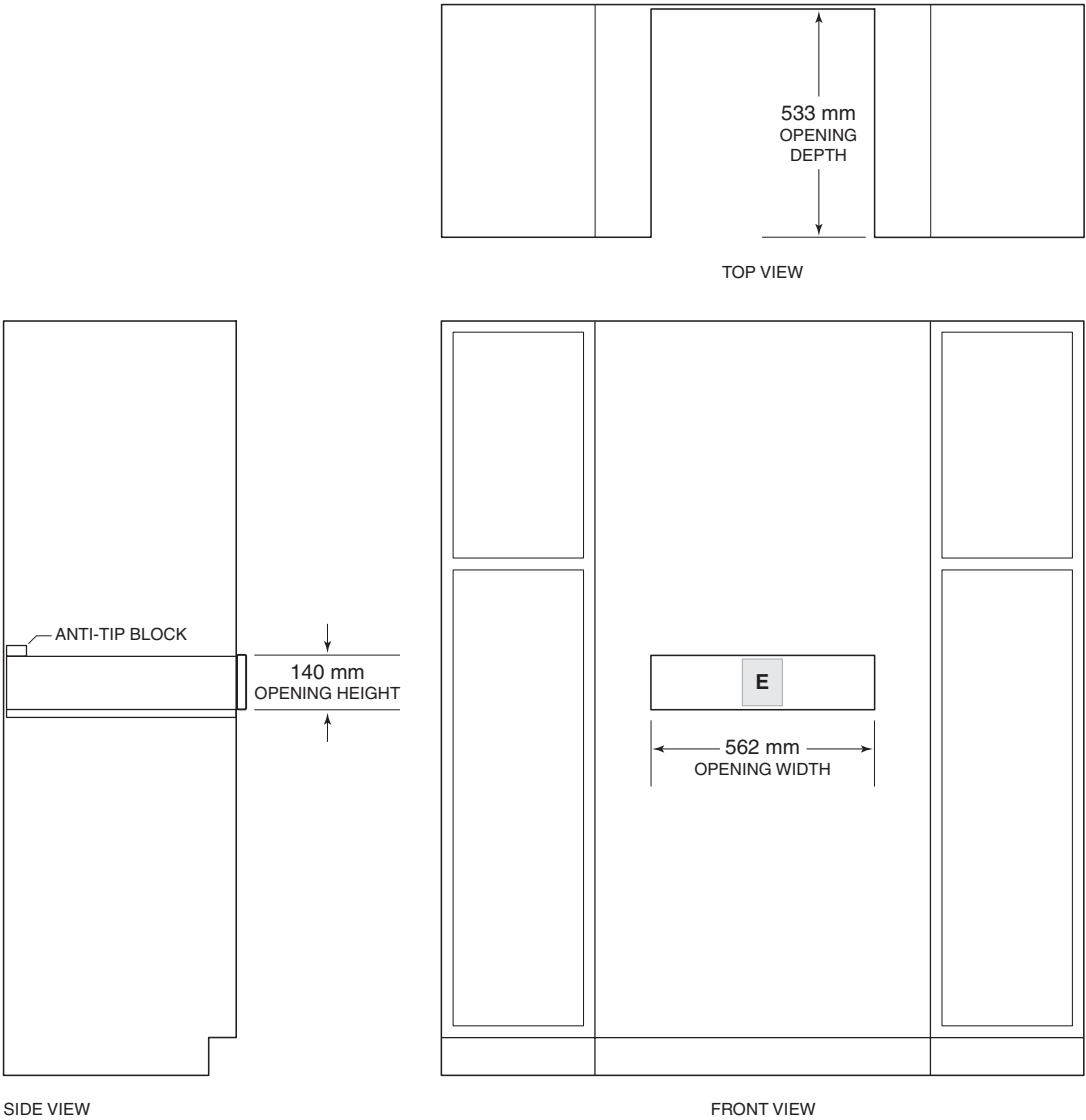

CUP WARMING DRAWER

Cup Warming Drawer

FLUSH INSET INSTALLATION

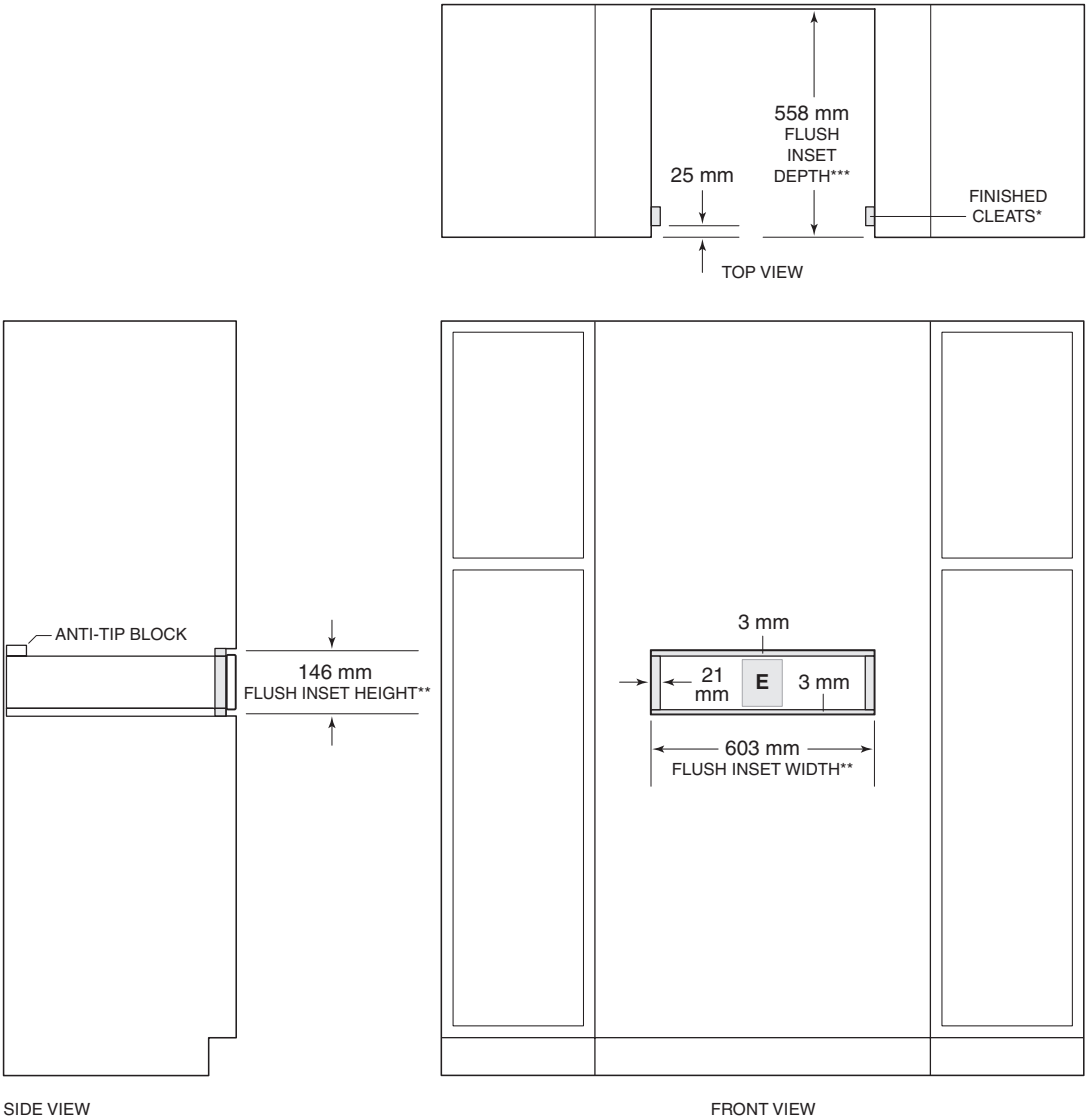

**Will be visible and should be finished to match cabinetry.*
***Dimension provides minimum reveals.*
****Does not include additional depth for the electrical connection.*


Vacuum Seal Drawer

The vacuum seal drawer can be installed in a standard or flush inset application. Stainless steel, black glass, and integrated drawer fronts are available in 61 cm and 76 cm widths. The integrated drawer front allows for a custom panel.


DRAWER FRONTS



OVERALL DIMENSIONS

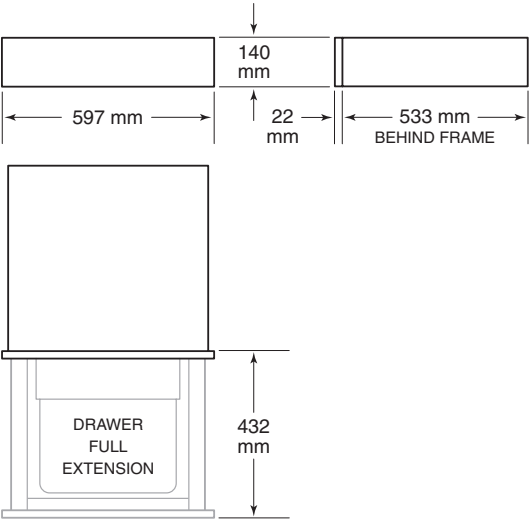

DRAWER FRONT DIMENSIONS



DRAWER FRONT	W
61 cm Drawer Front	597 mm
76 cm Drawer Front	759 mm

Planning Information

The vacuum seal drawer can be installed in a standard or flush inset application. Finish the edges of the opening. They may be visible when the drawer is open.

For standard installations, the face trim will overlap stiles and rails. Refer to the chart below.

For flush inset installations, a minimum 3 mm reveal is required on all sides. To ensure consistent reveals, each corner of the opening must be exactly 90°.

INSTALLATION REQUIREMENTS

BASE SUPPORT		MIN
Vacuum Seal Drawer		34 kg
TRIM OVERLAP		
Top		0 mm
Bottom		0 mm
Sides		18 mm

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).


Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.

ELECTRICAL REQUIREMENTS

Electrical Supply	220–240 V AC, 50/60 Hz
Service	320 W
Receptacle	grounding-type (earthed)
Power Cord	.9 m

Vacuum Seal Drawer


STANDARD INSTALLATION

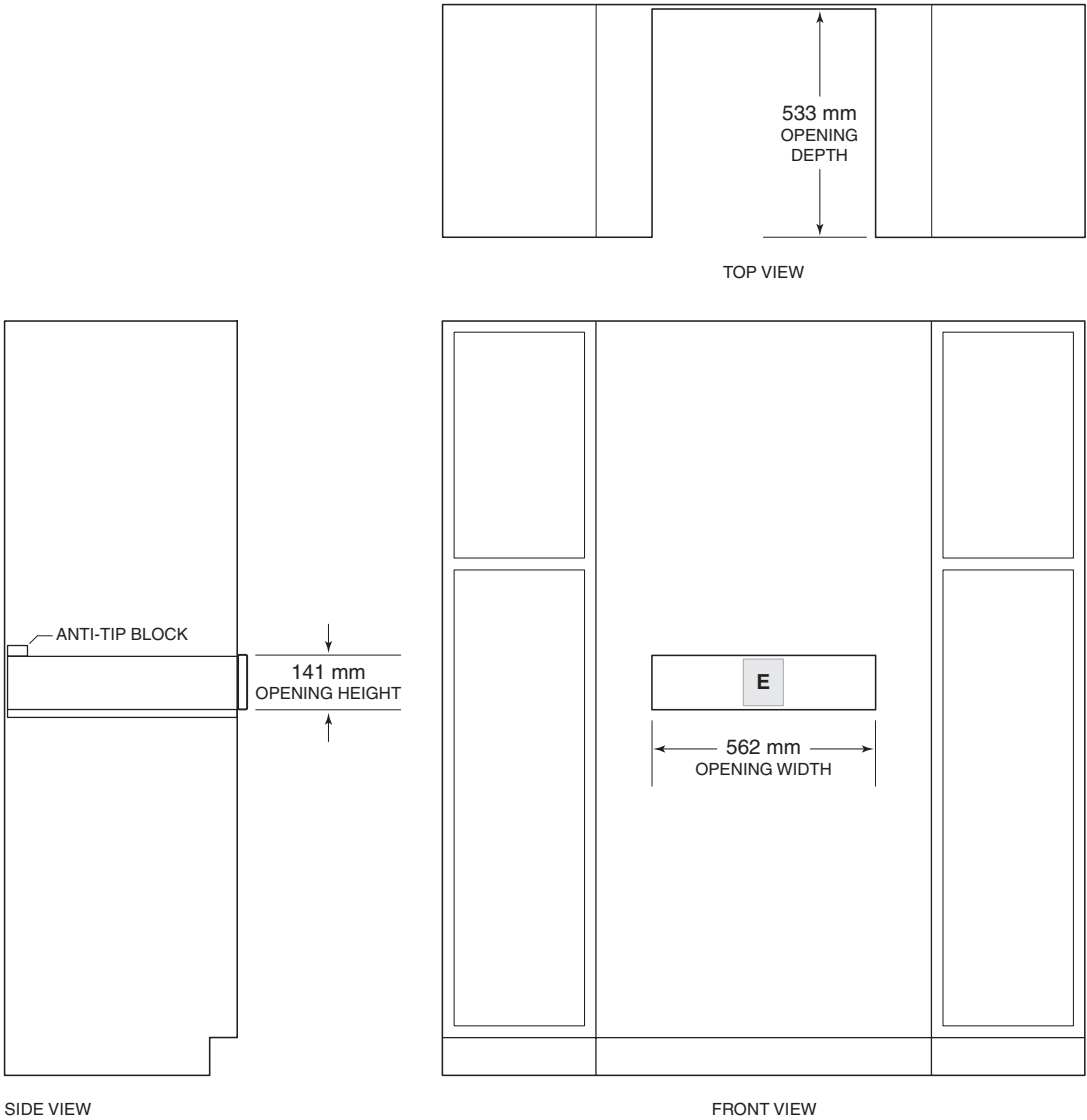

VACUUM SEAL DRAWER

Vacuum Seal Drawer

FLUSH INSET INSTALLATION

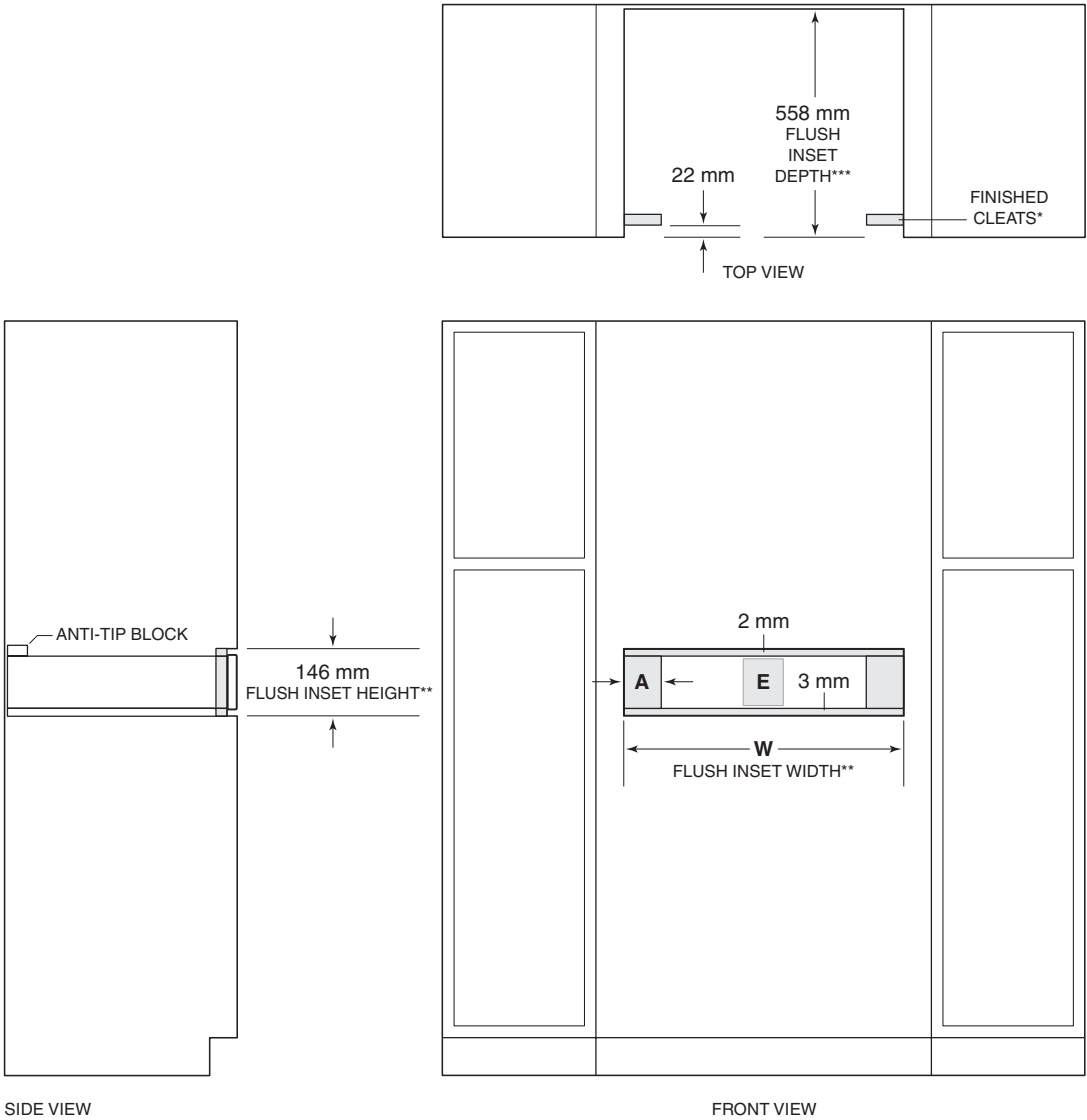

*Will be visible and should be finished to match cabinetry.
**Dimension provides minimum reveals.
***Does not include additional depth for the electrical connection.


FLUSH INSET WIDTH	W	A
610 mm Opening	603 mm	21 mm
762 mm Opening	765 mm	102 mm

Dual Fuel Ranges

Discover a new world of cooking—the best of two worlds, actually—with a Wolf dual fuel range. Topside, gas cooking in all its glory, with the fine control of dual-stacked, sealed burners and options that include the remarkable French top. Below, that marvel of culinary technology, the Wolf convection electric oven. Its two fans and four heating elements let you select from 10 cooking modes so you can choose the one precisely suited to the dish you are preparing. The ovens are self-cleaning. With a variety of range widths to choose from, kitchens large and small become gateways to the exciting new world of dual fuel cooking. All models are constructed of stainless steel and can be ordered in natural or LP gas.


CONFIGURATIONS

76 cm RANGE




ICBDF304


91 cm RANGE



ICBDF366




ICBDF364C




ICBDF364G


122 cm RANGE




ICBDF486C



ICBDF486G




ICBDF484CG




ICBDF484F

152 cm RANGE



ICBDF606CG




ICBDF604CF


DUAL FUEL RANGES

Dual Fuel Ranges


76 cm RANGE

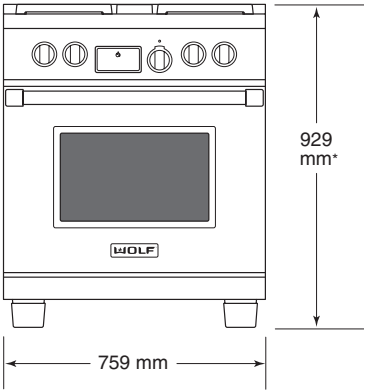



91 cm RANGE

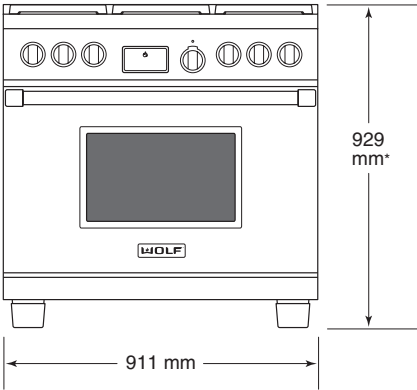

122 cm RANGE

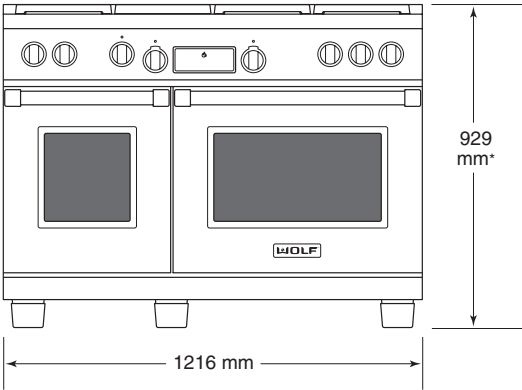

152 cm RANGE

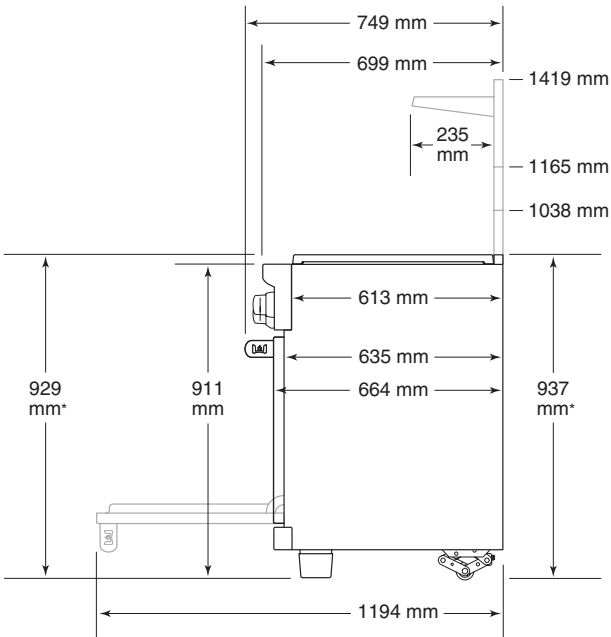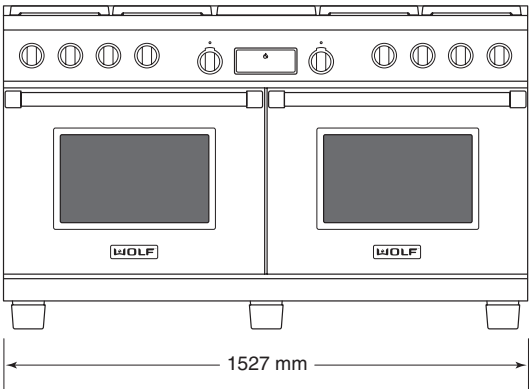

*929 mm MIN TO 983 mm MAX.

SIDE VIEW—ALL RANGES

Dual Fuel Ranges

BURNER RATING		
SURFACE BURNER	SIM	HI
Large	.3 kW	4.8 kW
Small	.1 kW	2.7 kW
FEATURE	NATURAL	LP
Charbroiler	5.6 kW	5.2 kW
Griddle	5.6 kW	5.2 kW
French Top	4.8 kW	4.0 kW

Planning Information

When installing against a combustible surface, a minimum 254 mm riser is required for a 91 cm dual fuel range with charbroiler or griddle and all 122 cm and 152 cm models. Follow all minimum clearances to combustible surfaces shown in the illustration on the following page.

A Wolf pro ventilation hood is recommended with the dual fuel range. Refer to page 109 for Pro Ventilation.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply flush with the wall or floor and within the shaded area shown in the illustration on the following page. A separate circuit servicing only this appliance is required.

Wolf dual fuel ranges have a terminal block that allows for a 3-wire or 4-wire installation.

Performance may be compromised if the electrical supply is less than 220 volts.

The range is supplied with a single phase and 3-phase convertible power inlet box. The wiring diagram covering the control circuit is provided with the oven.

REQUIRED POWER SUPPLY

Single phase	220-240 V AC, 50/60 Hz
3phase	380-415 V AC, 50 Hz

MAXIMUM CONNECTED LOAD

DUAL FUEL RANGES	SINGLE PHASE	3PHASE
762 mm and 914 mm	19 amps	18 amps
1219 mm	35 amps	18 amps
1524 mm	38 amps	18 amps

GAS SUPPLY

Installation must conform with all applicable gas codes.

A gas supply line of 19 mm rigid pipe must be provided to the range. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible metal appliance connector is recommended to connect the units ISO 7/1-14 female inlet to the gas supply line.


Wolf natural gas ranges will function up to 3124 m in altitude without adjustment and LP gas ranges will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

GAS REQUIREMENTS

NATURAL GAS	WC
Supply Pressure	25 mbar
LP GAS	WC
Supply Pressure	37 mbar

Dual Fuel Range

INSTALLATION

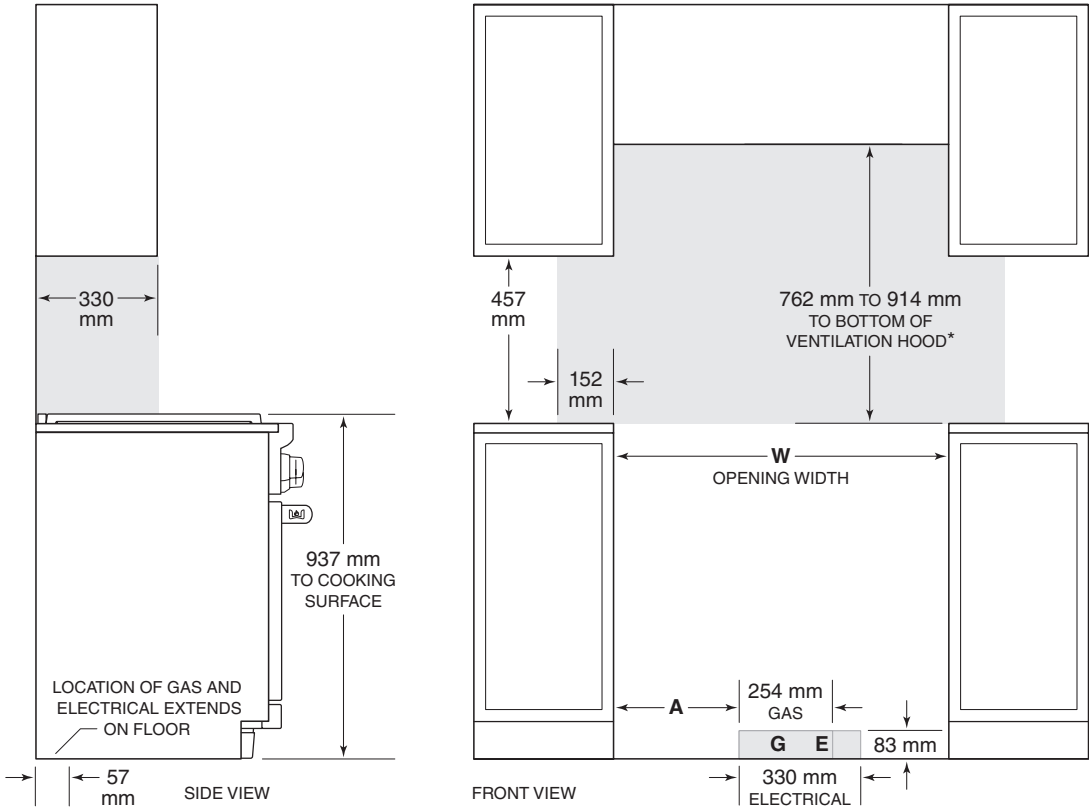

*Without ventilation hood, 914 mm minimum clearance countertop to combustible materials, 1118 mm for charbroiler.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 305 mm minimum clearance back of range to combustible rear wall above countertop.


OPENING WIDTH	W	A
76 cm Model	762 mm	216 mm
91 cm Model	914 mm	343 mm
122 cm Model	1219 mm	610 mm
152 cm Model	1530 mm	787 mm

Sealed Burner Rangetops

Wolf sealed burner rangetops incorporate all the gas cooking features of a Wolf dual fuel range. Customize your rangetop with your preferred combination of burners (from four to six), infrared griddle or charbroiler, or the remarkable French top. Compared with conventional electric elements, the infrared elements of the charbroiler and griddle are a revelation. They preheat almost instantly, distribute heat more evenly, and deliver fast temperature recovery after food is placed on the surface. All sealed burner rangetop models are constructed of stainless steel and can be ordered in natural or LP gas.


CONFIGURATIONS

76 cm RANGETOP




ICSRT304

91 cm RANGETOP




ICSRT364C




ICSRT364G


122 cm RANGETOP




ICSRT486C



ICSRT486G



ICSRT484CG




ICSRT484F


SEALED BURNER RANGETOPS

Sealed Burner Rangetops


76 cm RANGETOP

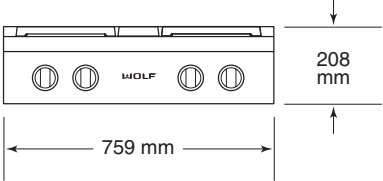

91 cm RANGETOP

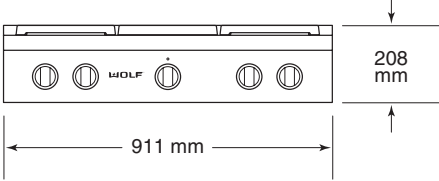

122 cm RANGETOP

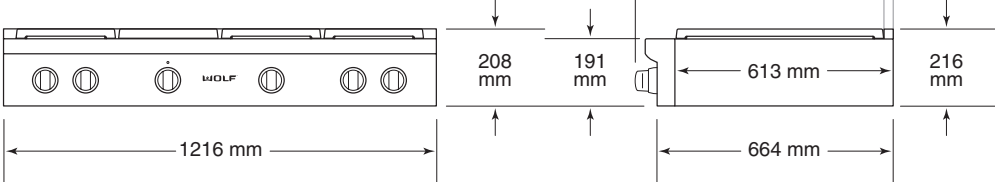

SIDE VIEW – ALL RANGETOPS

BURNER RATING

SURFACE BURNER	SIM	HI
Large	.9 kW	4.6 kW
Small	.6 kW	2.8 kW
FEATURE	NATURAL	LP
Charbroiler	5.8 kW	5.3 kW
Griddle	5.5 kW	4.7 kW
French Top	4.6 kW	4.0 kW

Planning Information

The platform to support the sealed burner rangetop must include a cutout for electrical and gas supply connections. Refer to the chart below for minimum base support.

When installing against a combustible surface, a minimum 254 mm riser is required for 91 cm and 122 cm sealed burner rangetops with a charbroiler or griddle. Follow all minimum clearances to combustible surfaces shown in the illustration on the following page.

A Wolf pro ventilation hood is recommended with the sealed burner rangetop. Refer to page 109 for Pro Ventilation.

A downdraft can be used with model ICBSRT304. An accessory trim kit is necessary for this installation. Contact an authorized Wolf dealer for details.

INSTALLATION REQUIREMENTS

PLATFORM	
Thickness	19 mm
BASE SUPPORT	
	MIN
76 cm Rangetop	91 kg
91 cm Rangetop	113 kg
122 cm Rangetop	136 kg

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply within the shaded area shown in the illustration on the following page. A separate circuit servicing only this appliance is required.

ELECTRICAL REQUIREMENTS

Electrical Supply	grounded, 220-240 VAC; 50/60 Hz
Service	0.2 A
Receptacle	grounding-type (earthed)
Power Cord	2 m

GAS SUPPLY

Installation must conform with all applicable gas codes.

A gas supply line of 19 mm rigid pipe must be provided to the rangetop. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible metal appliance connector is recommended to connect the units ISO 7/1-14 female inlet to the gas supply line.


Wolf natural gas rangetops will function up to 3124 m in altitude without adjustment and LP gas ranges will function up to 2621 m. If the installation exceeds these elevations, contact an authorized Wolf dealer for a high altitude conversion kit.

GAS REQUIREMENTS

NATURAL GAS		WC
Supply Pressure		25 mbar
LP GAS		WC
Supply Pressure		37 mbar

Sealed Burner Rangetop

INSTALLATION

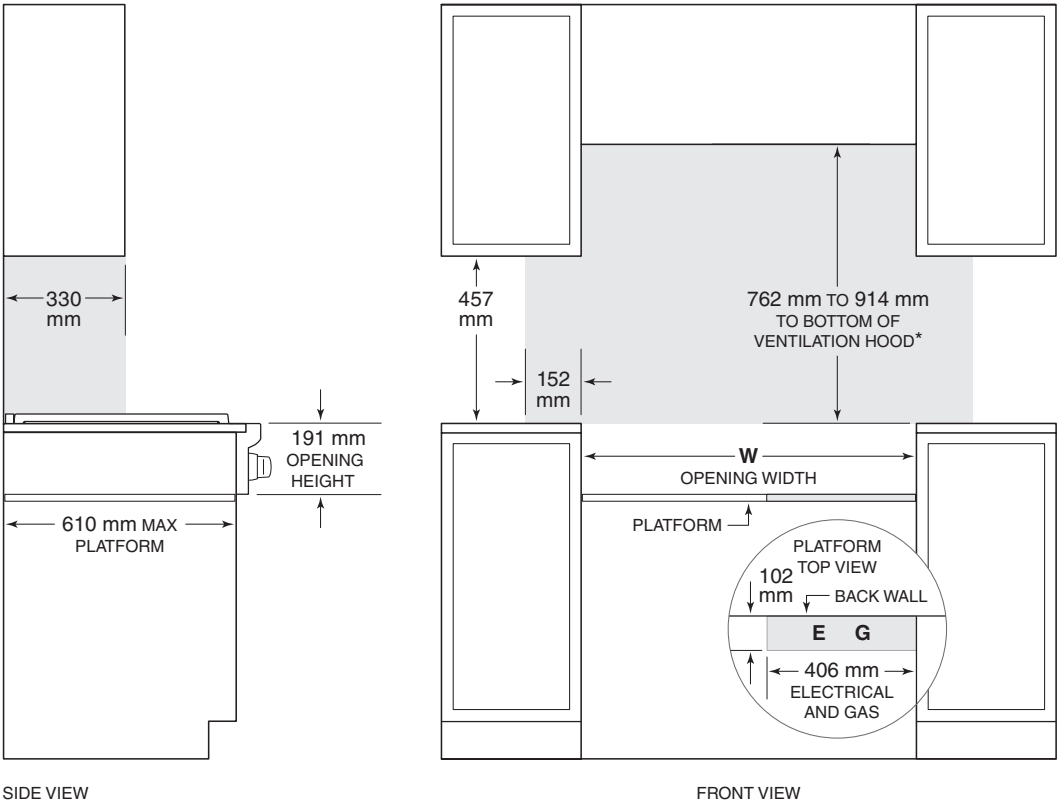


**Without ventilation hood, 914 mm minimum clearance countertop to combustible materials, 1118 mm for charbroiler.*
NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical and gas supply located through bottom of platform.
For island installation, 305 mm minimum clearance back of range to combustible rear wall above countertop.

OPENING WIDTH	W
76 cm Model	762 mm
91 cm Model	914 mm
122 cm Model	1219 mm


Outdoor Grills and Modules

Taste what happens when the heritage of professional cooking moves from the kitchen to the patio. Like their indoor counterparts, Wolf outdoor grills are precision instruments. Constructed of heavy-duty stainless steel, the 76 cm, 91 cm, 107 cm, and 137 cm grills have powerful burners every five inches for even heat distribution. An electric rotisserie with infrared burner produces succulent poultry and roasts. All grill models can be built in and all except the 137 cm grill, can be used on a cart for portable convenience. The 25,000 Btu burner module can be built into an outdoor kitchen and the side burner attached to a cart. Wolf grills and modules can be ordered in natural or LP gas.

OUTDOOR GRILLS

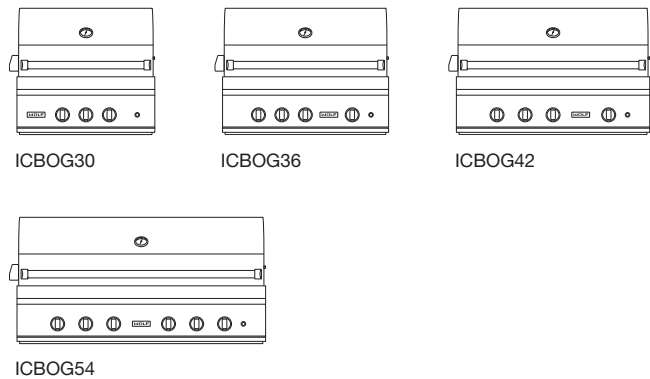


OUTDOOR MODULES




Outdoor Grills and Modules


OUTDOOR GRILL

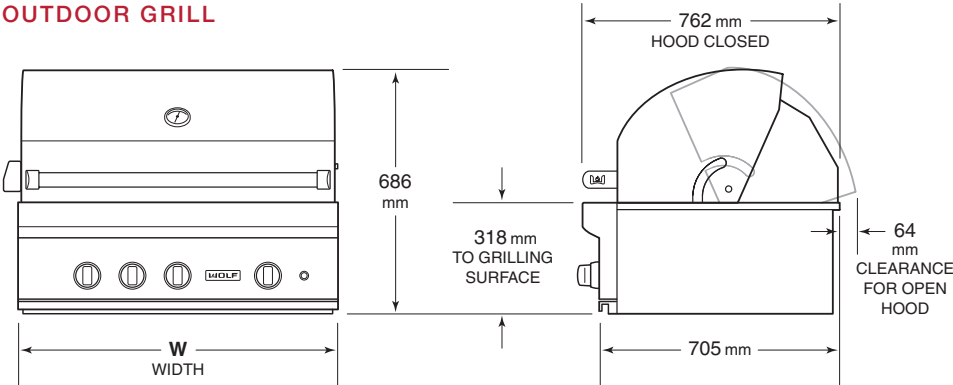

GRILL CART

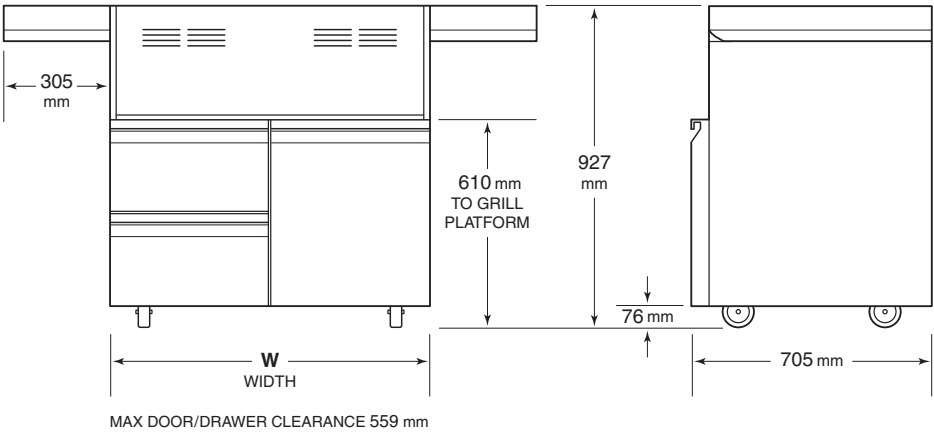

BURNER MODULE / SIDE BURNER

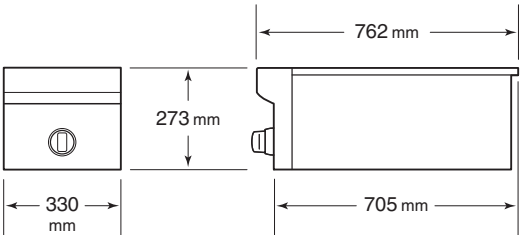

OUTDOOR GRILL	W
ICBOG30	762 mm
ICBOG36	914 mm
ICBOG42	1067 mm
ICBOG54	1372 mm

GRILL CART	W
ICBCART30	762 mm
ICBCART36	914 mm
ICBCART42	1067 mm

Outdoor Grills and Modules

BURNER RATING

GRILL BURNERS	kW
ICBOG30, ICBOG36, ICBOG42, ICBBM13, ICBSB13	7.3
ICBOG54	7.5
SEAR ZONE	kW
ICBOG36, ICBOG42	7.3
ICBOG54	7.5
ROTISSERIE	kW
ICBOG30	4.1
ICBOG36, ICBOG42	4.7
ICBOG54	(2) 4.1

Planning Information

For portable applications, Wolf grill carts are designed specifically to fit grill models ICBOG30, ICBOG36, and ICBOG42 and the side burner. Model ICBOG54 is designed for built-in applications only.

For built-in applications, Wolf outdoor grills and the burner module are designed for easy placement into a built-in enclosure. For outdoor grills, installation in a combustible enclosure requires an insulating liner. For the burner module, an insulating liner is not required. The enclosure should be built according to specifications for your specific installation on the following pages. If the burner module is installed next to an outdoor grill, a minimum of 305 mm is required between the units on the rotisserie motor side and 51 mm on the opposite side. A rotisserie side conversion kit is available from an authorized Wolf dealer.

Optional stainless steel accessory doors and drawers are available for built-in applications.

Grill carts, insulating liners, and stainless steel doors and drawers are available through an authorized Wolf dealer.

Planning Information

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

The electrical outlet must be located within reach of the power cord. A separate circuit servicing only this appliance is required.

IMPORTANT NOTE: A ground fault circuit interrupter (GFCI) or residual current device (RCD) is required to reduce the risk of electrical shock.

ELECTRICAL REQUIREMENTS (GRILL / MODULE)

Electrical Supply	grounded, 220-240 VAC, 50/60 Hz
Service	1 A
Receptacle	3-prong grounding-type (earthed), IEC inlet

ELECTRICAL REQUIREMENTS (ROTISSERIE)

Electrical Supply—Input	grounded, 220-240 VAC, 50/60 Hz
Electrical Supply—Output	12 VDC
Service	0.5 A (6 Watts)
Receptacle	barrel plug, 2.1 mm ID x 5.5 mm OD

GAS SUPPLY

Installation must conform with all applicable gas codes.

A gas supply line of 19 mm rigid pipe must be provided to the outdoor grill or module. If local codes permit, a certified, .9 m long, 13 mm or 19 mm ID flexible metal appliance connector is recommended to connect the units ISO 7-1 female inlet to the gas supply line.

An inline regulator is installed on the unit for connecting to NAT or LP gas sources. For local dealer information, visit our website, wolfappliance.com.


If the outdoor grill is being connected to a whole house LP supply, the LP gas pressure regulator is not provided. It can be purchased from an authorized Wolf dealer.

GAS REQUIREMENTS

NATURAL GAS	
Supply Pressure	12.5 mbar
Min Line Pressure	17.5 mbar
Max Regulator Pressure	100 mbar
LP GAS	
Supply Pressure	25 mbar
Min Line Pressure	27.4 mbar
Max Regulator Pressure	100 mbar


Outdoor Grill

NON-COMBUSTIBLE INSTALLATION

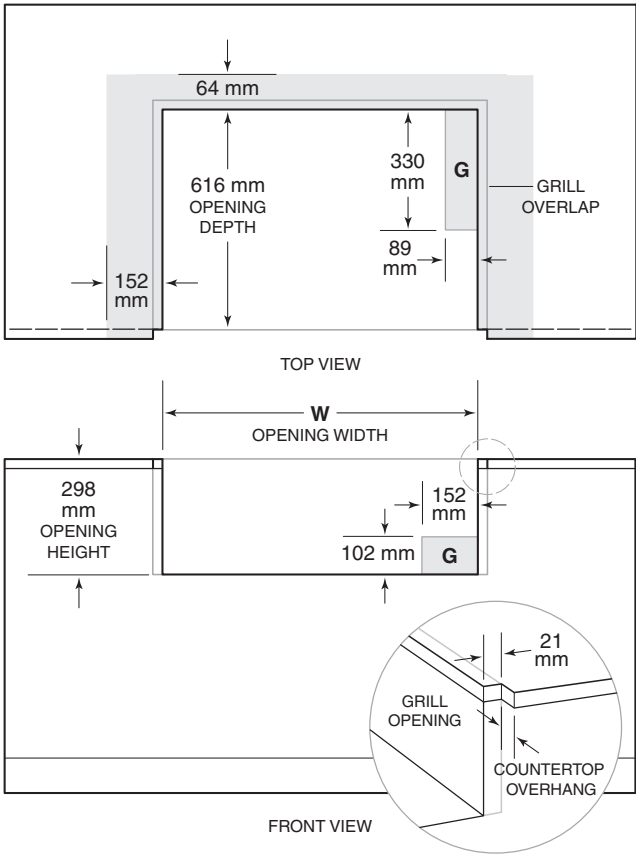

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

COMBUSTIBLE INSTALLATION

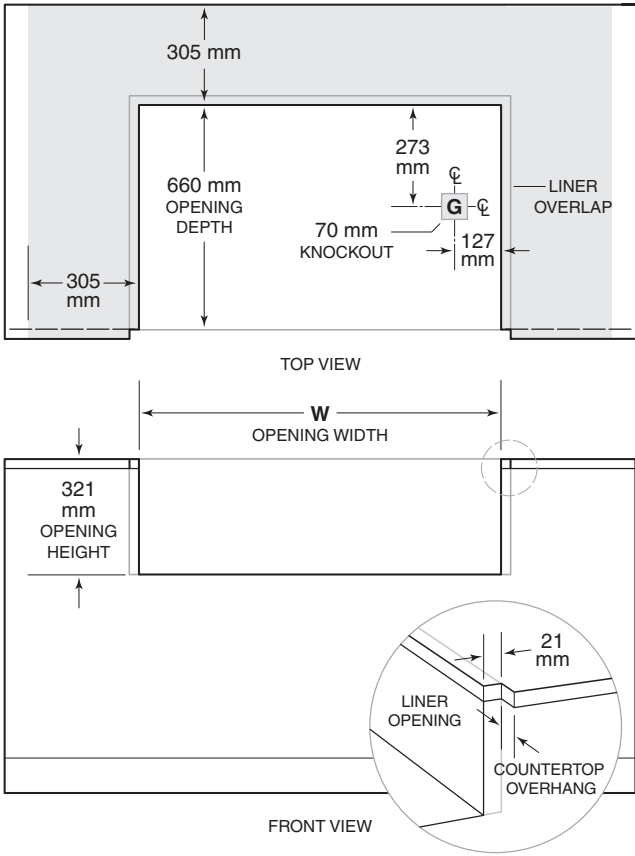

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.


NON-COMBUSTIBLE ENCLOSURE	W
ICBOG30	724 mm
ICBOG36	876 mm
ICBOG42	1029 mm
ICBOG54	1334 mm

COMBUSTIBLE ENCLOSURE	W
ICBOG30	851 mm
ICBOG36	1003 mm
ICBOG42	1156 mm
ICBOG54	1461 mm

For installation of the accessory doors and drawers, refer to Outdoor Accessories on the following pages.

Burner Module


INSTALLATION

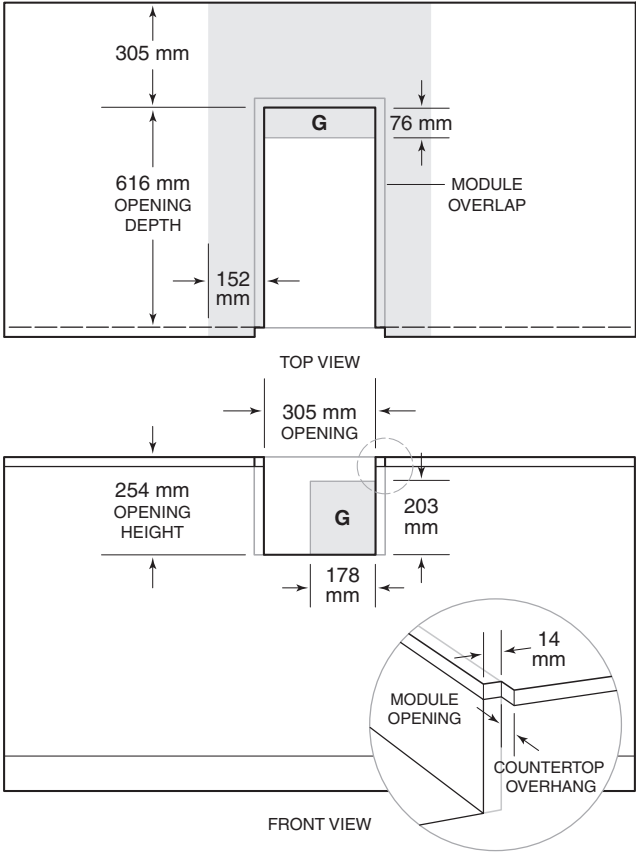


NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area. An insulating liner is not required.

Outdoor Accessories

ACCESS DOORS




SINGLE



DOUBLE

ACCESSORY DRAWERS/DOORS




SINGLE DRAWER




2- OR 3-DRAWER




DOOR/DRAWER




PAPER TOWEL DRAWER



TALL DRY STORAGE




SHORT DRY STORAGE



TRASH/RECYCLE DRAWER

Overall Dimensions


ACCESS DOORS

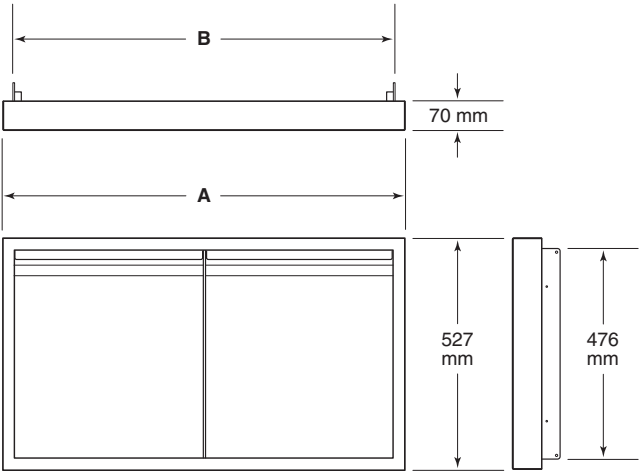


DOOR WIDTH	A	B
46 cm Single	457 mm	413 mm
76 cm Double	762 mm	718 mm
91 cm Double	914 mm	870 mm
107 cm Double	1067 mm	1022 mm
137 cm Double	1372 mm	1327 mm

Overall Dimensions


SINGLE DRAWER

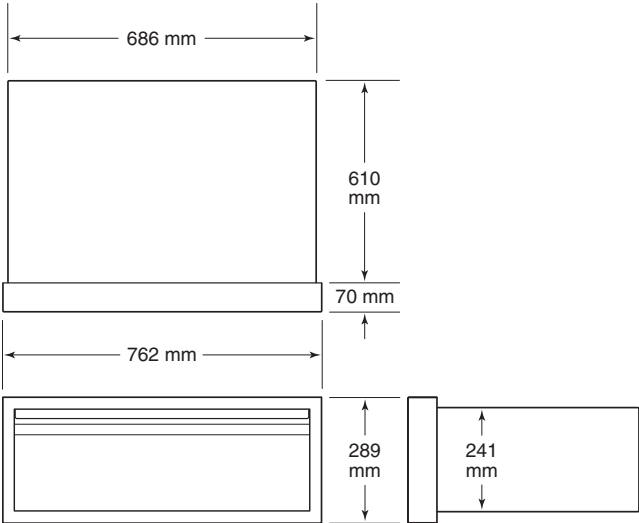


2- OR 3-DRAWER

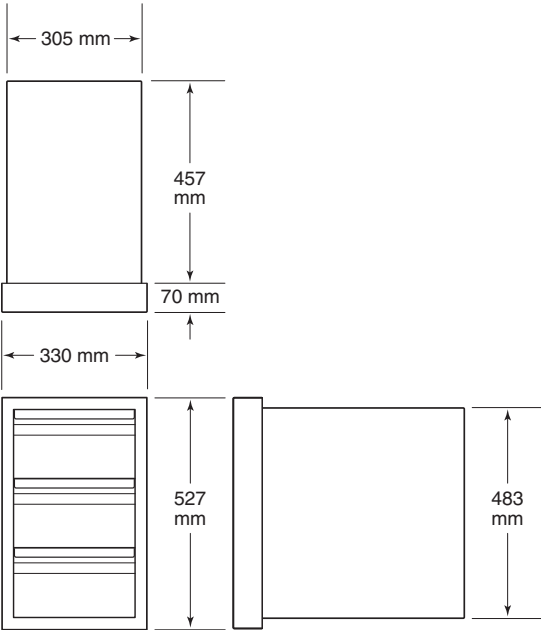

PAPER TOWEL DRAWER

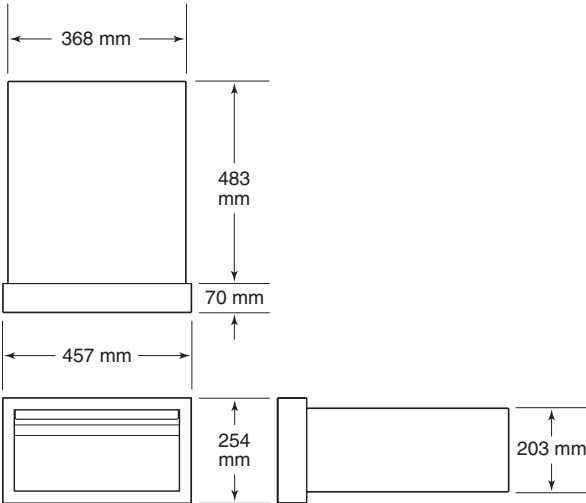


DRAWER/DOOR

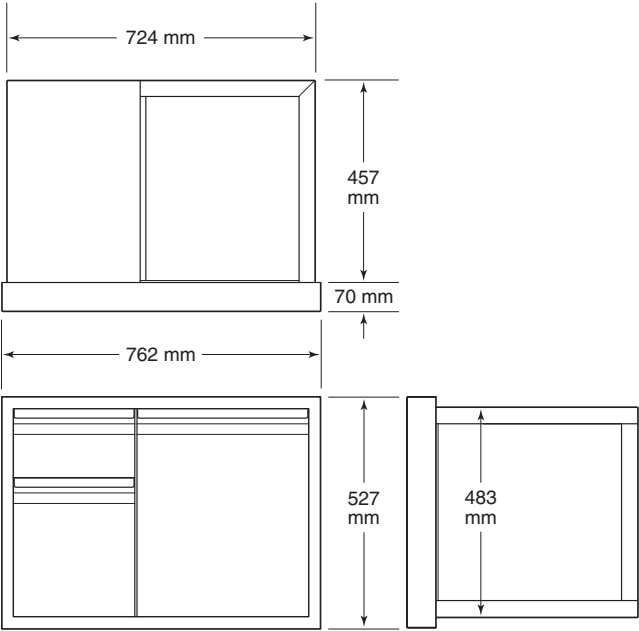


Overall Dimensions


TALL DRY STORAGE

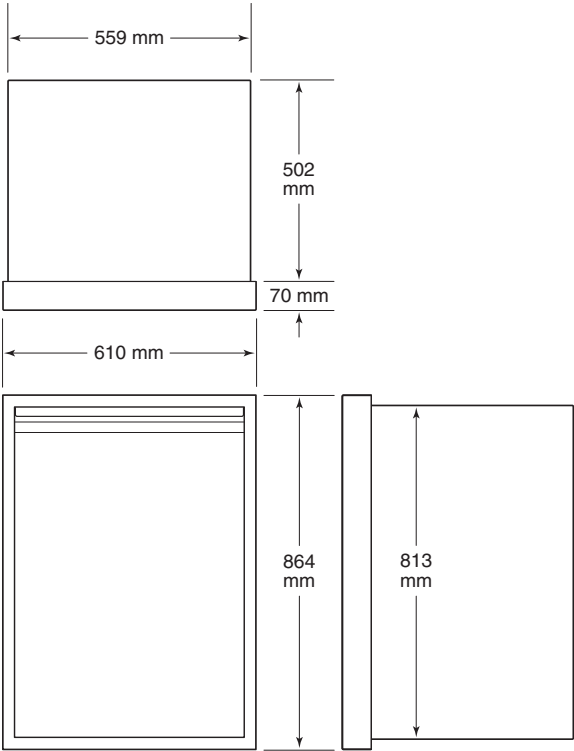

TRASH/RECYCLE DRAWER

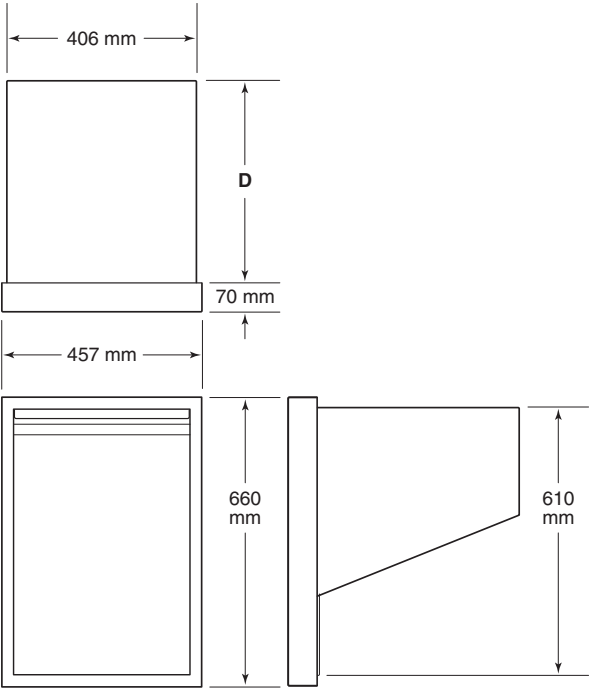


SHORT DRY STORAGE

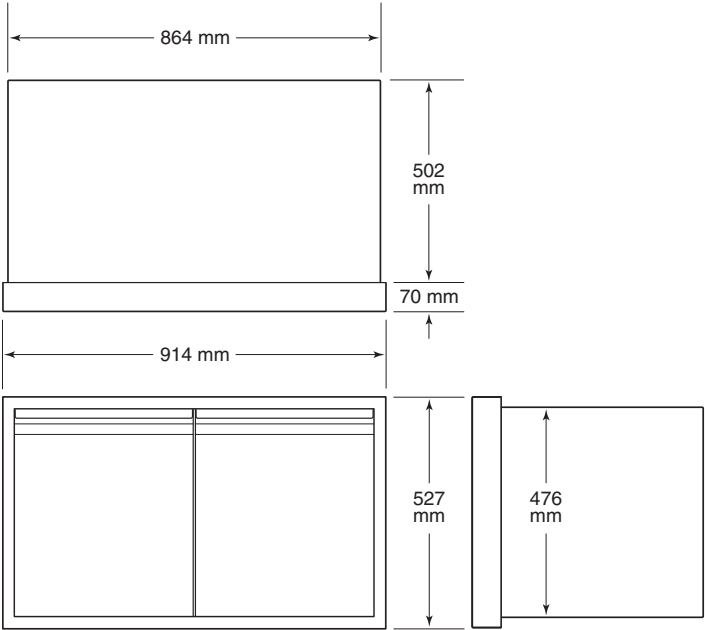

DEPTH	D
Single	495 mm
Double	572 mm

Installation


ACCESS DOORS

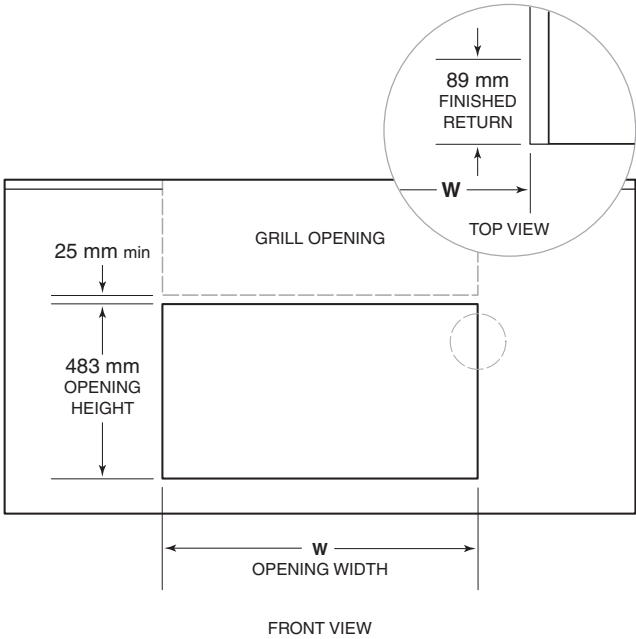

OPENING WIDTH	W
46 cm Single	419 mm
76 cm Double	724 mm
91 cm Double	876 mm
107 cm Double	1029 mm
137 cm Double	1334 mm

IMPORTANT NOTE: The opening dimensions provided are for a standard installation. For a flush installation, refer to the overall dimensions and adjust the opening dimensions accordingly.

ACCESSORY DRAWERS/DOORS

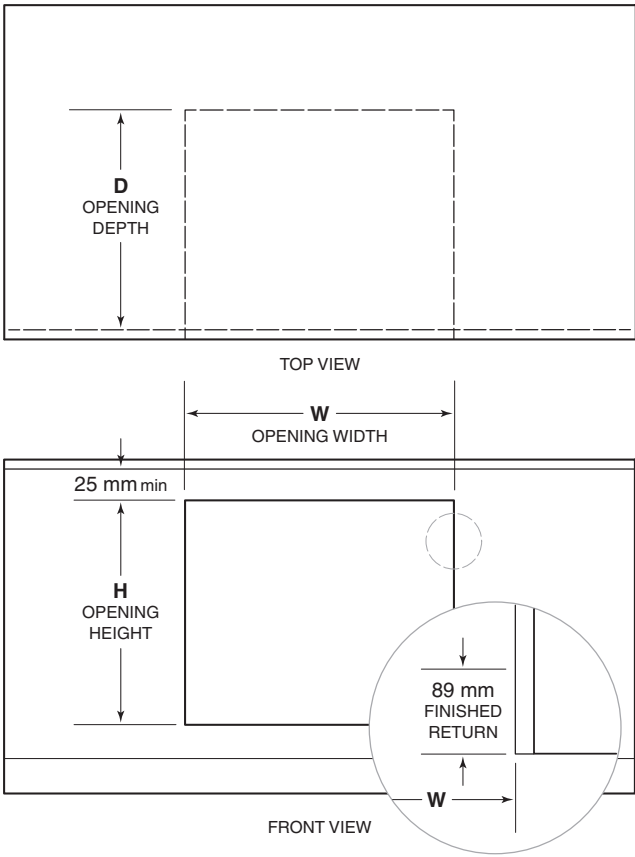

OPENING	W	H	D
Single Drawer	692 mm	248 mm	616 mm
Paper Towel Drawer	375 mm	210 mm	489 mm
2- or 3-Drawer	311 mm	489 mm	464 mm
Drawer/Door	730 mm	489 mm	464 mm
Tall Dry Storage	565 mm	819 mm	508 mm
Short Dry Storage	870 mm	483 mm	508 mm
Single Trash/Recycle	413 mm	616 mm	502 mm
Double Trash/Recycle	413 mm	616 mm	578 mm


BASE SUPPORT	MIN
2- or 3-Drawer	68 kg
Drawer/Door	68 kg
Dry Storage	136 kg

Cooktop Ventilation Hoods


The new generation of Wolf cooktop ventilation hoods feature three new looks—black, stainless, and glass. Brilliant LED lighting illuminates your cooking surface while powerful multi-speed blowers whisk away smoke and odors. The dishwasher-safe filters can be removed easily for cleaning. The wall-mount and island hoods are crafted of stainless steel.

COOKTOP VENTILATION HOODS


BLACK

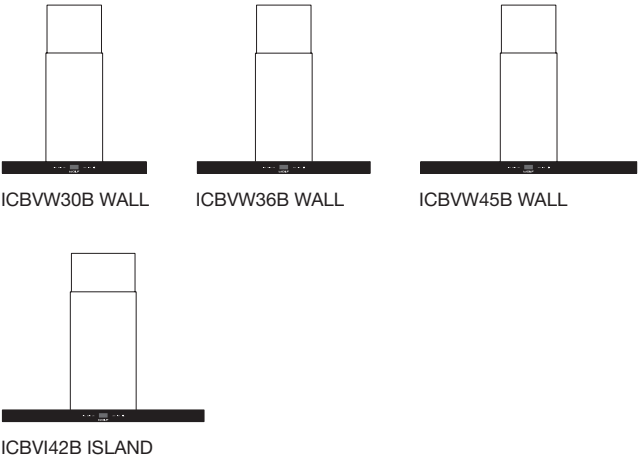

STAINLESS

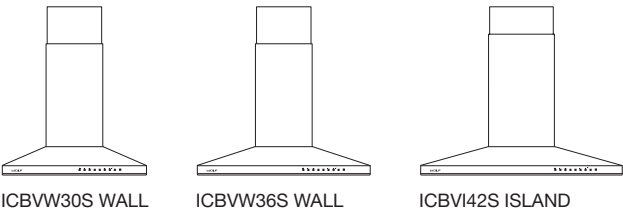


GLASS

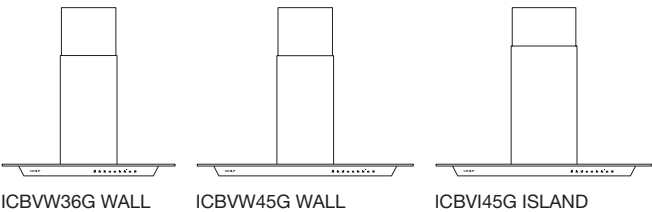

COOKTOP HOODS

Cooktop Ventilation Hoods


WALL HOODS – BLACK

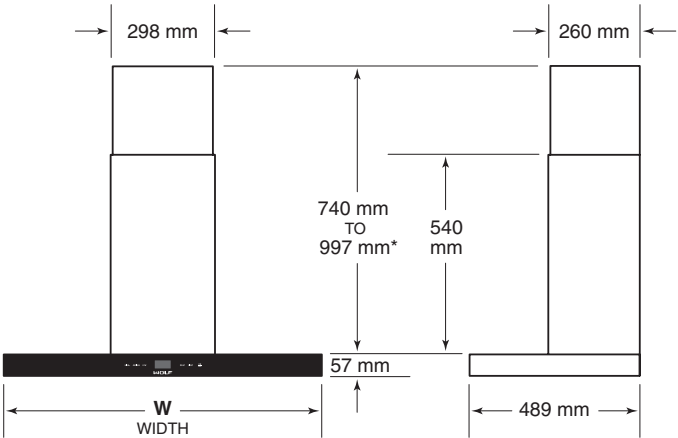

*1248 mm to 1505 mm with accessory flue extension.

WIDTH	W
ICBVW30B	762 mm
ICBVW36B	914 mm
ICBVW45B	1143 mm

ISLAND HOOD – BLACK

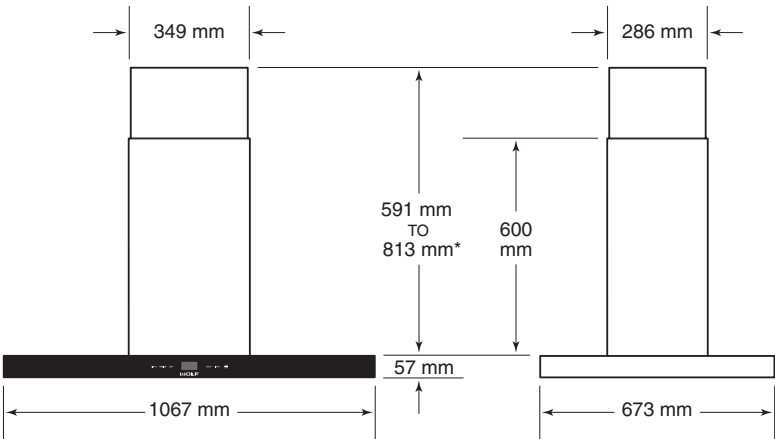


*1175 mm to 1397 mm with accessory flue extension.

COOKTOP HOODS

Cooktop Ventilation Hoods


WALL HOODS—STAINLESS

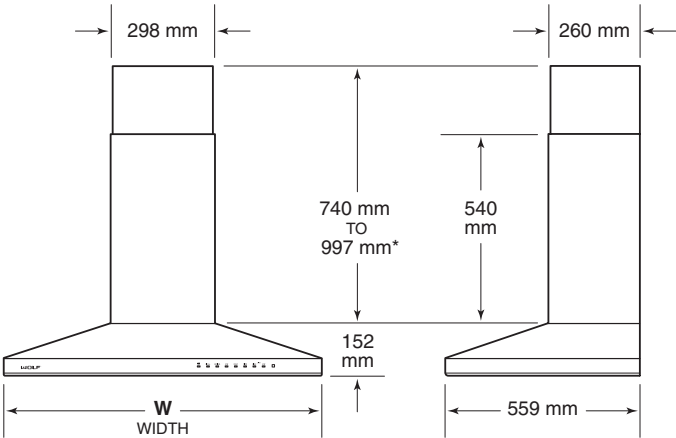

*1248 mm to 1505 mm with accessory flue extension.

WIDTH	W
ICBVW30S	762 mm
ICBVW36S	914 mm

ISLAND HOOD—STAINLESS

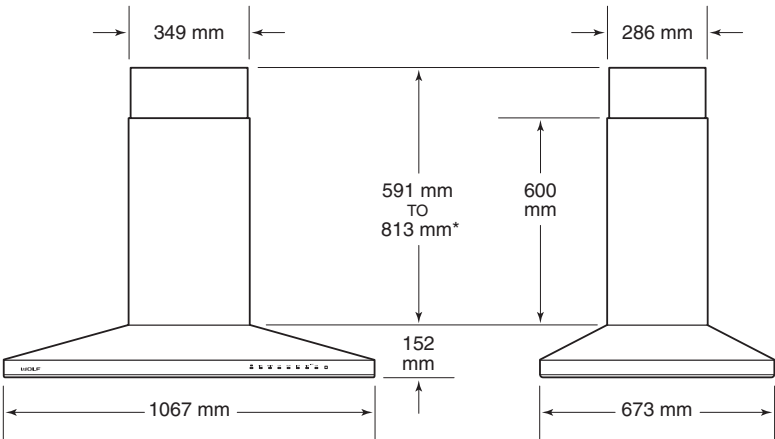


*1175 mm to 1397 mm with accessory flue extension.

COOKTOP HOODS

Cooktop Ventilation Hoods


WALL HOODS – GLASS

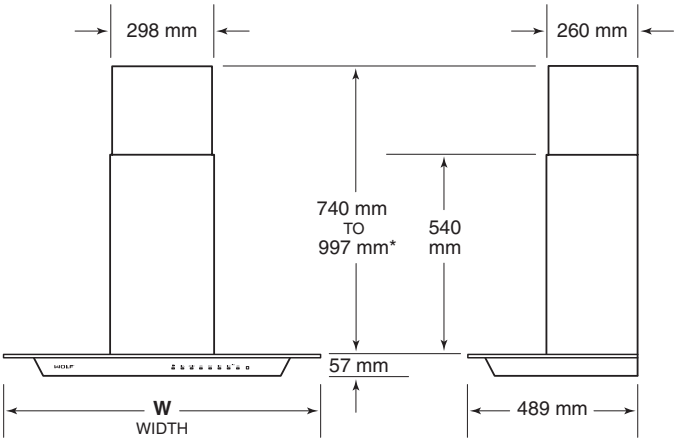

*1248 mm to 1505 mm with accessory flue extension.

WIDTH	W
ICBVW36G	914 mm
ICBVW45G	1143 mm

ISLAND HOOD – GLASS

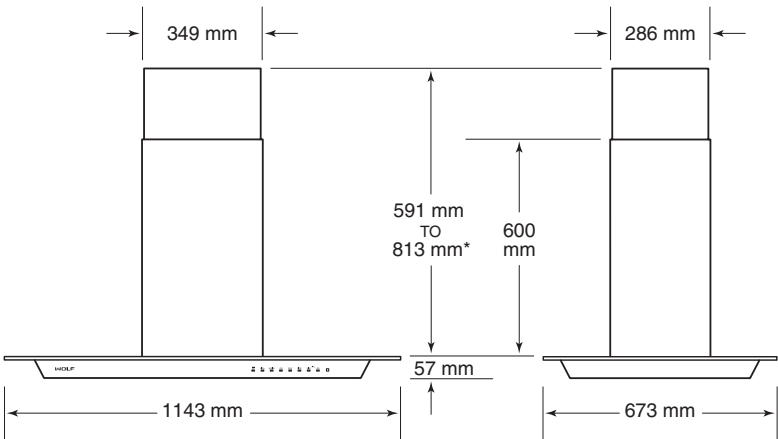

*1175 mm to 1397 mm with accessory flue extension.

Planning Information

Wolf cooktop ventilation hoods are recommended for use with Wolf induction, electric, and gas cooktops, and modules. For ranges and rangetops, a Wolf pro ventilation hood is recommended.

These hoods have a telescopic chimney flue. A flue extension is available through an authorized Wolf dealer.

Installation of the cooktop hood should be 762 mm to 914 mm from the bottom of the hood to the countertop.

Wall and island hoods require an internal or remote blower assembly, available through an authorized Wolf dealer. Refer to Ventilation Suggestions on pages 113–115. Cooktop hoods have a vertical discharge with 152 mm round duct.

Consult a qualified HVAC professional for specific installation and ducting applications.


ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

For wall hoods, locate the electrical supply within the shaded area shown in the illustration below. For island hoods, locate the electrical supply on the ceiling inside the top of the hood. A separate circuit servicing only this appliance is recommended.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50 Hz
	220 V AC, 60 Hz
Service	1.9 A

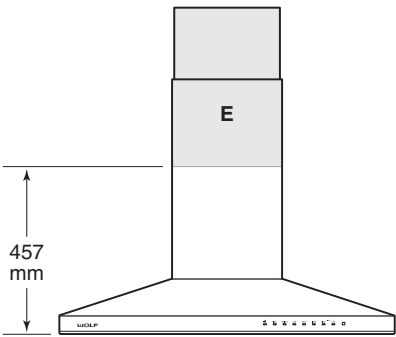


762 mm TO 914 mm BOTTOM EDGE TO COUNTERTOP

Electrical location for all wall hoods


Ceiling-Mounted Hood

The new ceiling-mounted hood is our most contemporary ventilation offering, nearly disappearing into its surroundings. It comes in two widths and is available in stainless steel. The hood ships with a remote control and can be operated using the remote control or the control panel. The control panel is recessed into the right side of the hood. The dishwasher-safe filters can be removed easily for cleaning.

CEILING-MOUNTED HOOD

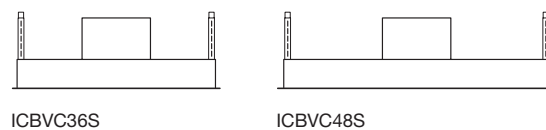

Ceiling-Mounted Hood

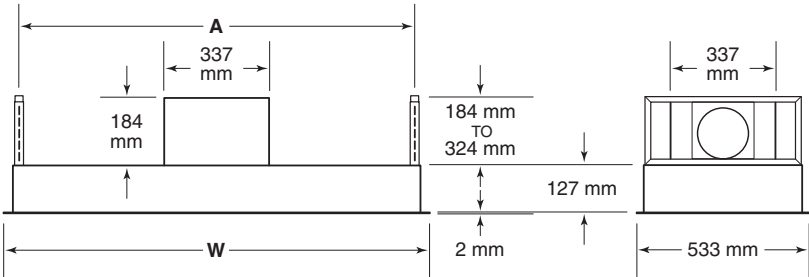

DIMENSIONS	W	A
914 mm Hood	902 mm	841 mm
1219 mm Hood	1200 mm	1121 mm

Planning Information

Installation of the ceiling-mounted hood should be 914 mm to 2134 mm from the bottom of the hood to the countertop.

The hood can be operated using the remote control or the control panel located on the right side of the hood.


The hood is shipped without a blower assembly. A 900 CMH internal blower is available through an authorized Wolf dealer. Refer to Ventilation Suggestions on pages 113–115.

The ceiling-mounted hood includes a 152 mm round discharge for the internal blower. The blower box can be rotated to discharge right, left, front, or rear.

Consult a qualified HVAC professional for specific installation and ducting applications.

RECIRCULATING INSTALLATION

The ceiling-mounted hood with internal blower can be installed in a recirculating application. The air discharge must be a minimum of 1016 mm from every side of the hood. Refer to the illustration below. The ductwork and vent cover are not provided. A recirculation kit, available through an authorized Wolf dealer, is required.

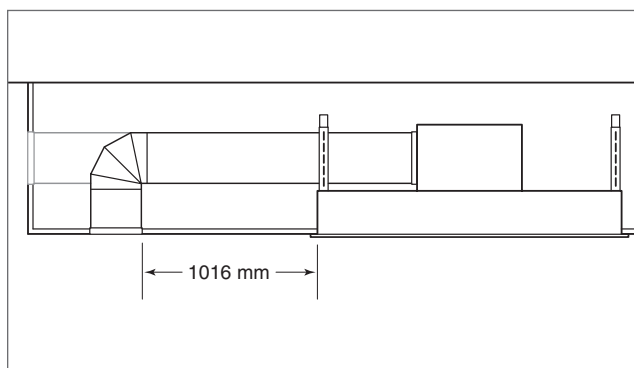

Recirculation application

Planning Information


ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply within the shaded area shown in the illustration below. Allow a minimum 305 mm electrical cable for connection. A separate circuit servicing only this appliance is required.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50 Hz 220 V AC, 60 Hz
Service	1.9 A

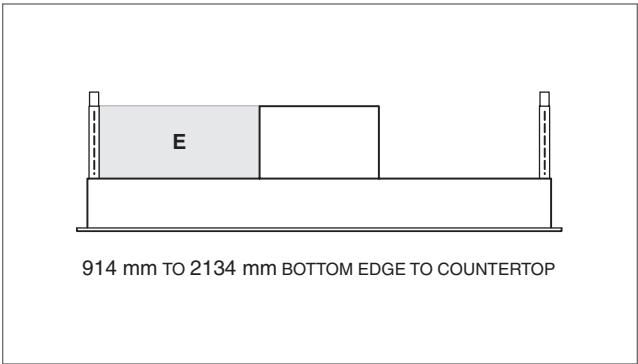


Electrical location

Opening Dimensions


CEILING-MOUNTED HOOD

Refer to the chart and illustrations below for opening dimensions and typical framing. Framing must be able to support a minimum of 45 kg.

HOOD	W
91 cm Hood	873 mm
122 cm Hood	1175 mm

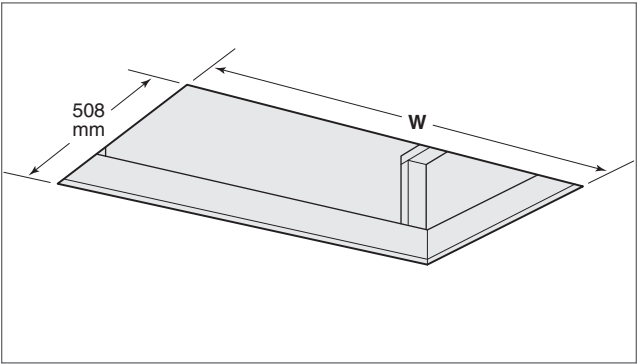

Opening dimensions

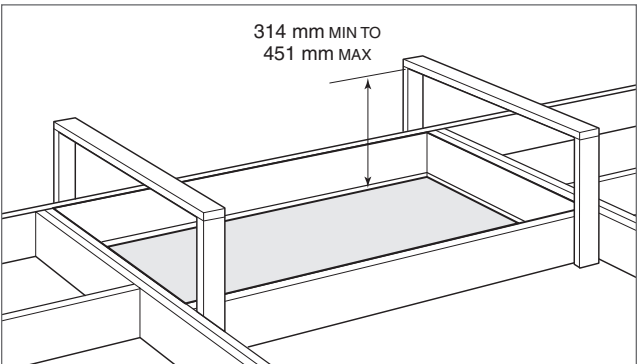


Support framing (typical)


Under-Cabinet Hood Insert

The new under-cabinet hood insert mounts inside a cabinet. It comes in two widths and is available in stainless steel. The hood ships with a remote control and can be operated using the remote control or the control panel. The dishwasher-safe filters can be removed easily for cleaning.

UNDER-CABINET HOOD INSERT

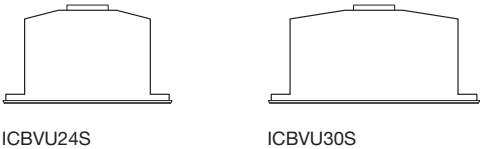

DIMENSIONS

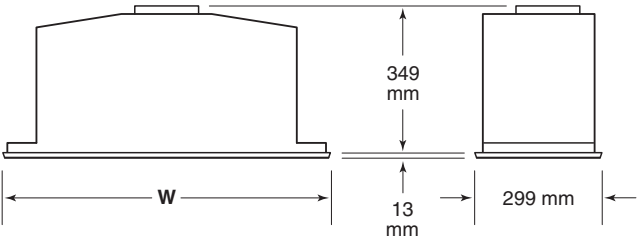

WIDTH	W
ICBVU24S	521 mm
ICBVU30S	702 mm

Planning Information

The under-cabinet hood insert should be installed 610 mm to 914 mm from the bottom of the hood to the countertop.

The hood can be operated using the remote control or the control panel located at the front of the hood bottom.


The hood requires a 900 CMH internal blower, available through an authorized Wolf dealer. For local dealer information, visit our website, wolfappliance.com. Refer to Ventilation Suggestions on pages 113–115. The hood includes a 152 mm round discharge for the internal blower.

Consult a qualified HVAC professional for specific installation and ducting applications.

RECIRCULATION APPLICATION

The hood can be installed in a recirculation application. Refer to the illustration below. Ductwork is not provided.

Recirculating filters, available through an authorized Wolf dealer, are required.

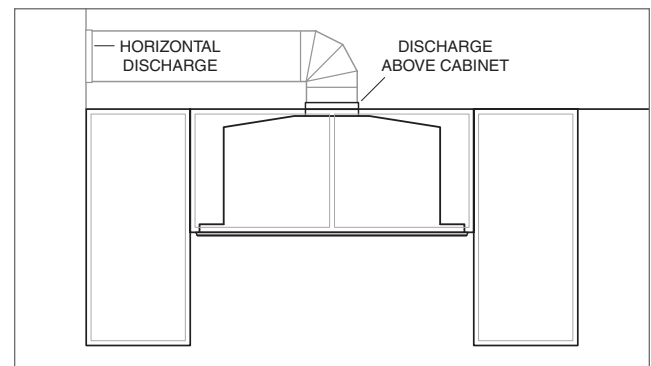

Recirculation application

Planning Information


ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply above or in an adjacent cabinet within reach of the power cord. Refer to the illustration below. A separate circuit servicing only this appliance is required.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50 Hz 220 V AC, 60 Hz
Service	1.9 A
Power Cord	1.2 m

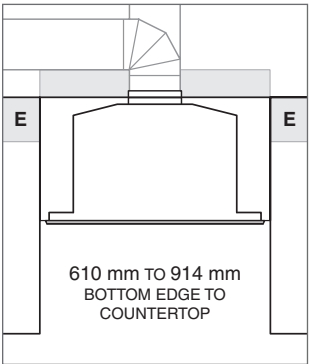


Electrical location

Opening Dimensions

UNDER-CABINET HOOD INSERT

Refer to the chart and illustration below for opening dimensions. The cabinet must be able to support a minimum of 45 kg.

OPENING WIDTH	W
ICBVU24S	495 mm
ICBVU30S	676 mm

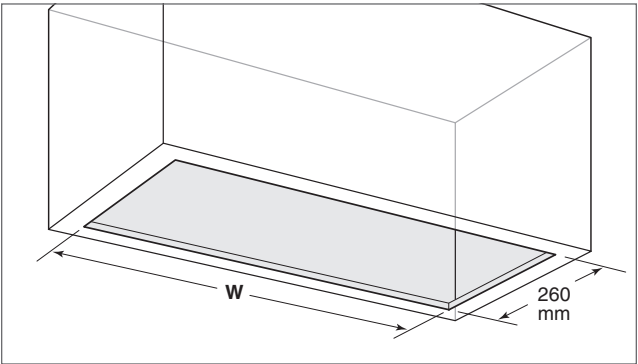


Opening dimensions

Downdraft Ventilation


Constructed of heavy duty stainless steel, the Wolf down-draft rises from the countertop to whisk away odor and smoke into stainless steel, mesh filters and can be lowered beneath the countertop when not in use. Downdrafts integrate perfectly with Wolf induction cooktops, gas cooktops, and some modules. They can also be installed with certain sealed burner rangetops.

DOWNDRAFTS



ICBDD30


ICBDD36



ICBDD45

Downdraft

DIMENSIONS

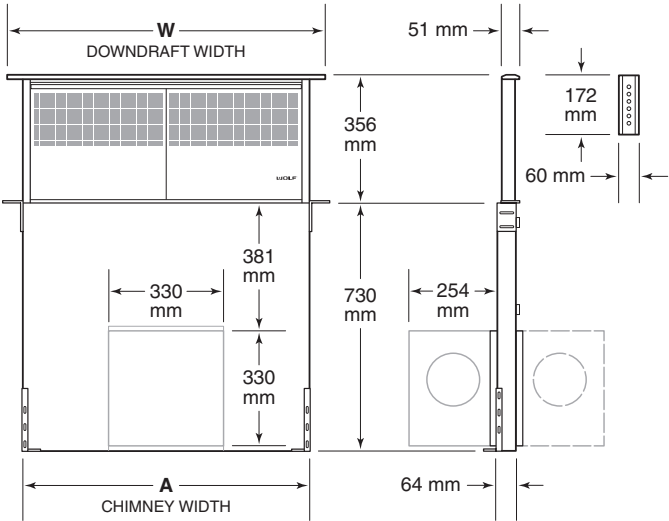

NOTE: Shown with front mounted internal blower with 152 mm round discharge, dashed line represents rear mount.

WIDTH	W	A
ICBDD30	762 mm	673 mm
ICBDD36	914 mm	826 mm
ICBDD45	1143 mm	978 mm

Planning Information

Wolf downdrafts can be installed with most Wolf cooktops, but are not compatible with the grill and steamer modules. Downdrafts can be installed with the sealed burner rangetop model ICBSRT304. An accessory trim kit is necessary for this installation. Contact an authorized Wolf dealer for details.

For installation with a Wolf cooktop, a minimum 638 mm deep flat countertop is required.

For installation with a sealed burner rangetop or 762 mm or 914 mm contemporary cooktop, an accessory trim kit is required. Contact an authorized Wolf dealer for details.

The remote-mounted control module must be located within 2.7 m of the downdraft assembly and a minimum 76 mm from the edge of the cooktop cutout.

Internal and remote blowers are available through an authorized Wolf dealer. Refer to Ventilation Suggestions on pages 113–115.

Internal blowers include a 152 mm round discharge and can be front or rear mounted. It can be discharged in any direction by rotating the blower box. Remote blowers include a 254 mm discharge and can be discharged from the front or rear.

Consult a qualified HVAC professional for specific installation and ducting applications.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply as shown in the illustrations on the following pages. A separate circuit servicing only this appliance is required. A ground fault circuit interrupter (GFCI) is not recommended and may cause interruption of operation.


Certain installations may require that the electrical supply be placed in an adjacent cabinet.

ELECTRICAL REQUIREMENTS

Electrical Supply	220-240 V AC, 50 Hz 220 V AC, 60 Hz
Service	1.9 A
Receptacle	grounding-type (earthed)
Power Cord	.8 m

Downdraft

INSTALLATION WITH STANDARD INSTALLED COOKTOP

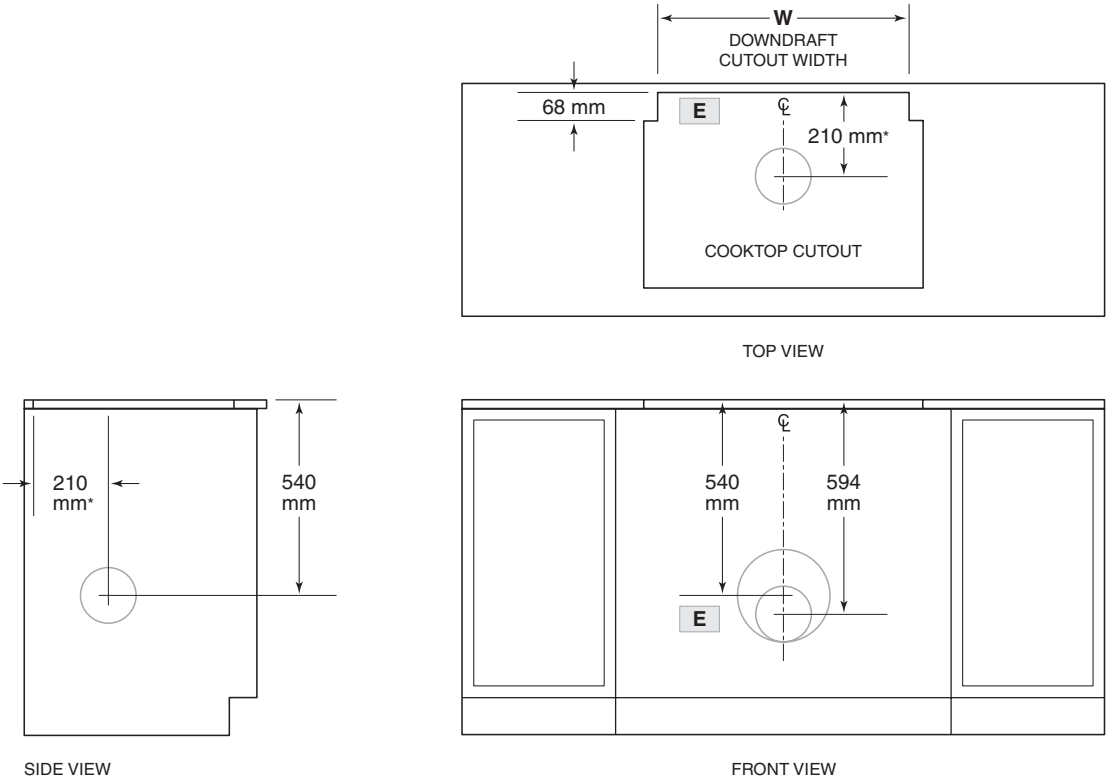


*152 mm back from countertop cutout when internal blower is rear mounted.
NOTE: Internal blower 152 mm round, side, rear or bottom discharge. Remote blower 254 mm round, rear discharge.
Centerline indicates center of downdraft cutout.


CUTOUT WIDTH	W
ICBDD30	699 mm
ICBDD36	851 mm
ICBDD45	1003 mm

Downdraft


INSTALLATION WITH FLUSH INSTALLED COOKTOP

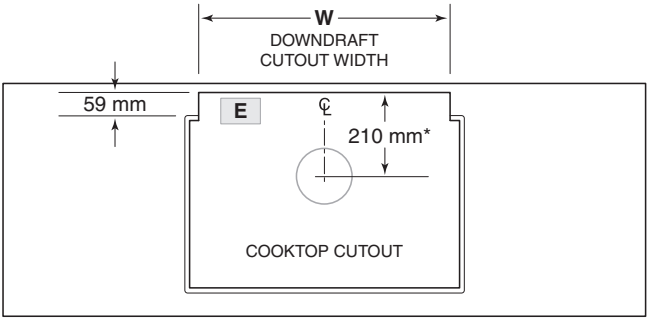

TOP VIEW



SIDE VIEW

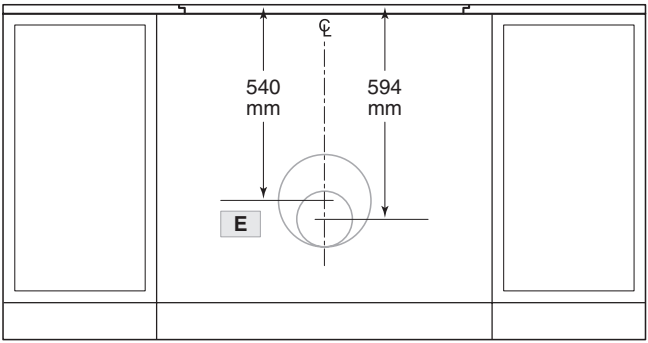


FRONT VIEW

*152 mm back from countertop cutout when internal blower is rear mounted.
NOTE: Internal blower 152 mm round, side, rear, or bottom discharge. In-line and remote blower 254 mm round, rear discharge.
Centerline indicates center of downdraft cutout.

CUTOUT WIDTH	W
ICBDD30	699 mm
ICBDD36	851 mm

Downdraft

INSTALLATION WITH SEALED BURNER RANGETOP

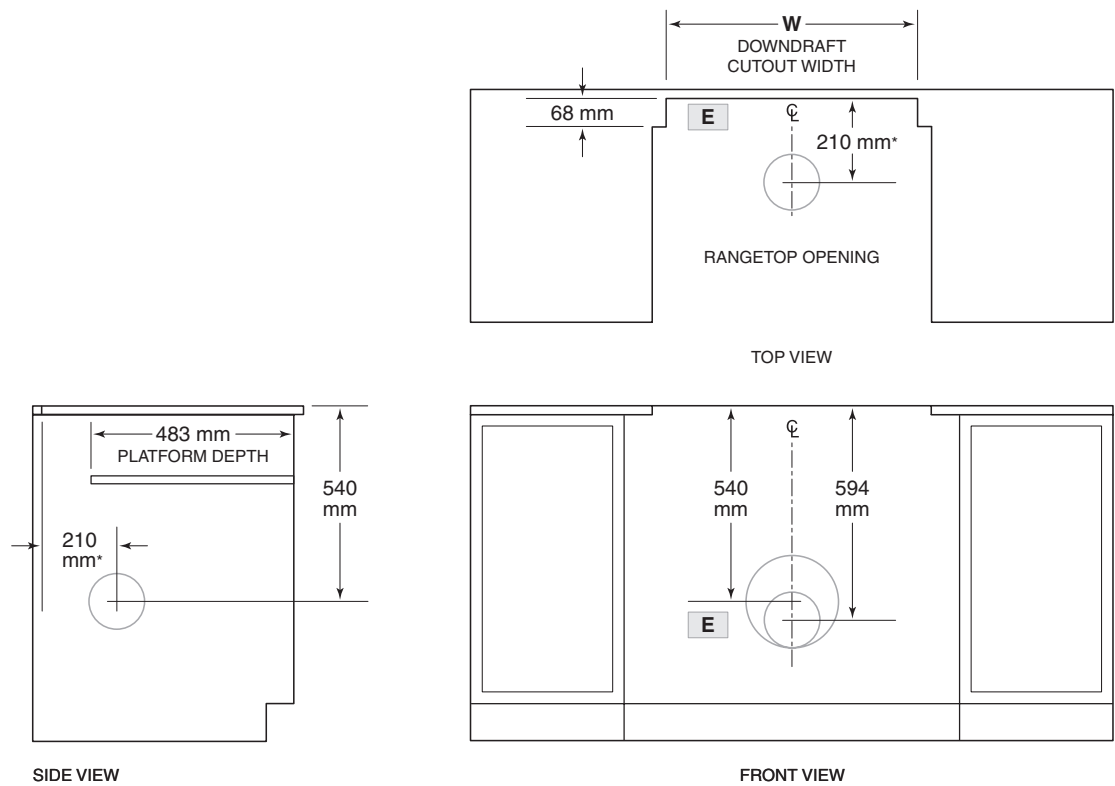

*152 mm back from countertop cutout when internal blower is rear mounted.
NOTE: Internal blower 152 mm round, side, rear or bottom discharge. Remote blower 254 mm round, rear discharge.
Centerline indicates center of downdraft cutout.


CUTOUT WIDTH	W
ICBDD30	699 mm
ICBDD36	851 mm

Pro Ventilation Hoods

Professional heritage shines through in Wolf professional-style ventilation. Exteriors are heavy-duty, welded stainless steel, so finely hand-finished that they appear seamless. Pro wall hoods are available in a variety of widths. Stainless steel baffle filters and halogen lighting extend the professional look and back it up with pro-level performance. All pro ventilation hoods are crafted of stainless steel.

PRO HOODS


WALL HOODS




61 cm / 69 cm DEEP

Pro Hoods

61 cm DEEP WALL HOOD

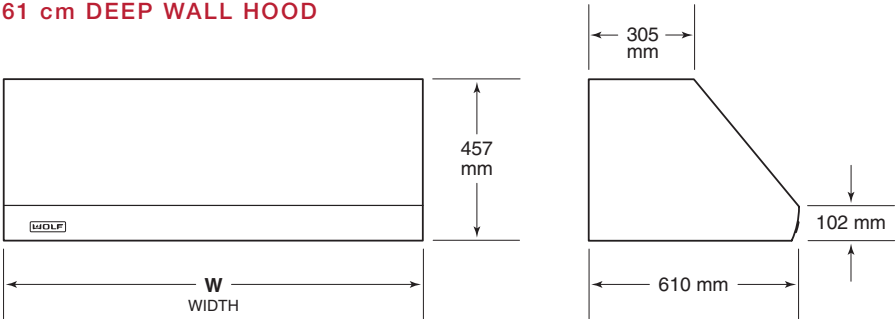

69 cm DEEP WALL HOOD

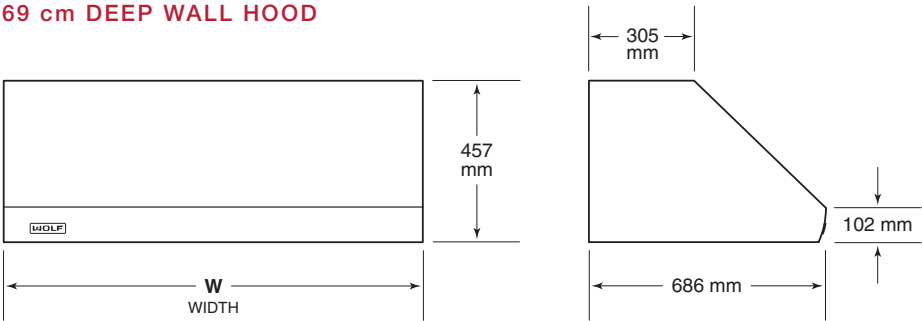

WIDTH

61 cm DEEP WALL HOOD	W
	91 cm, 122 cm

69 cm DEEP WALL HOOD	W
	76 cm, 91 cm, 107 cm, 122 cm, 152 cm

Planning Information

Pro ventilation hoods are recommended for use with all Wolf cooking appliances. Wall hoods should be at least as wide as the cooking surface.

For optimal performance in wall hood applications, a pro 69 cm deep wall hood is recommended for use with ranges and rangetops with a charbroiler or griddle.

Installation of the hood should be 762 mm to 914 mm from the bottom of the hood to the countertop.

Pro hoods are shipped without a blower assembly. Internal and remote blowers are available through an authorized Wolf dealer. The blower will vary in size and is dictated by the cooking unit, volume of air, and length of the duct run. Refer to Ventilation Suggestions on pages 113–115.

Pro hoods accommodate a 254 mm round duct and have a vertical discharge. For the 61 cm and 69 cm deep wall hoods, a horizontal discharge kit is available through an authorized Wolf dealer.

Consult a qualified HVAC professional for specific installation and ducting applications.

Optional stainless steel duct covers in a variety of heights are available for pro wall hoods through an authorized Wolf dealer.

ELECTRICAL REQUIREMENTS

Installation must comply with all applicable electrical codes and be properly grounded (earthed).

Locate the electrical supply within the shaded area shown in the illustration on the following page. Allow a minimum 305 mm electrical cable for connection. A separate circuit servicing only this appliance is required.

ELECTRICAL REQUIREMENTS


Electrical Supply	220-240 V AC, 50 Hz
	220 V AC, 60 Hz
Service	1.9 A

RECIRCULATING INSTALLATION

61 cm and 69 cm deep wall hoods with an internal blower (1014 CMH or less), 76 cm and 91 cm widths only, can be used in a non-ducted application with a recirculating filter. In this installation, kitchen air is purified through the filters and returned as clean air into the room. A recirculation kit, available through an authorized Wolf dealer is required.

Installation

61 cm / 69 cm DEEP WALL HOODS

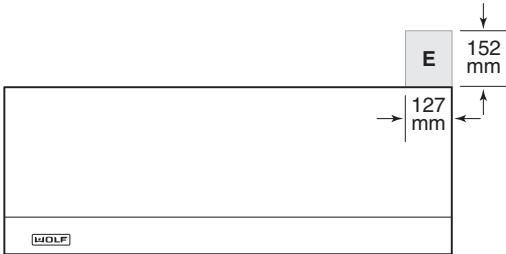

762 mm TO 914 mm BOTTOM EDGE TO COUNTERTOP


Blower Assemblies

For Wolf ventilation hoods and downdrafts that do not include a blower assembly, an internal or remote blower assembly must be selected to accommodate the cooking appliance, CMH requirements, and homeowner preferences. Internal and remote blowers are available through an authorized Wolf dealer.


Ventilation suggestions on the following pages provide Wolf product CMH and blower options for each ventilation hood and downdraft.

Refer to the illustrations below for the dimensions of Wolf remote blowers. Installation instructions shipped with each Wolf ventilation product provide detailed specifications.


1528 CMH REMOTE

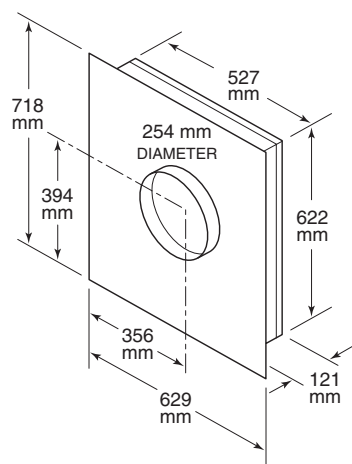

2028 CMH REMOTE

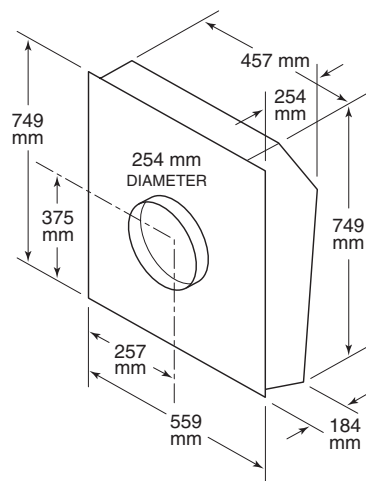

2535 CMH REMOTE

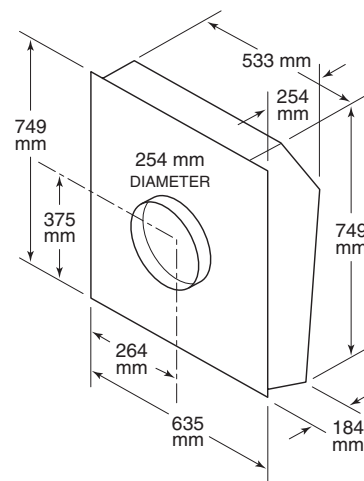

Wolf Product CMH

CMH	COOKTOP HOOD	DOWNDRAFT	PRO HOOD
COOKTOP / MODULE			
ICBCI152TF/S ICBCG152TF/S	900	900	1014
ICBSM15TF/S ICBGM15TF/S	900		1014
ICBTM15TF/S ICBMM15TF/S	900	900	1014
ICBCI243TF/S ICBCI243C/B	900		1014
ICBCI304TF/S ICBCI304T/S	900	900	1014
ICBCI304C/B	900		1014
ICBCG304T/S ICBCG304P/S	900	900	1014
ICBCI365TF/S ICBCI365T/S	900	900	1014
ICBCI365C/B	900		1014
ICBCG365T/S ICBCG365P/S	900	900	1014
ICBCG365C/S	900		1014
DUAL FUEL RANGE			
ICBDF304 ICBDF366			1014
ICBDF364C ICBDF364G			1528
ICBDF486C ICBDF486G ICBDF484CG ICBDF484F			1859
ICBDF606CG ICBDF604CF			1859
SEALED BURNER RANGETOP			
ICBSRT304		900	1014
ICBSRT364C ICBSRT364G			1528
ICBSRT486C ICBSRT486G ICBSRT484CG ICBSRT484F			1528

Wolf Ventilation Blower Options

BLOWER	INTERNAL				REMOTE		
CMH	900	1014	1528	1859	1528	2028	2535
COOKTOP HOOD							
ICBVW30B ICBVW36B ICBVW45B ICBVI42B	•				•		
ICBVW30S ICBVW36S ICBVI42S	•				•	•	•
ICBVW36G ICBVW45G ICBVI45G	•				•		
ICBVC36S ICBVC48S	•						
ICBVU24S ICBVU30S	•						
DOWNDRAFT							
ICBDD30 ICBDD36 ICBDD45	•				•	•	•
PRO 61 cm DEEP WALL HOOD							
ICBPW362418		•	•	•	•	•	•
ICBPW482418		•	•	•	•	•	•
PRO 69 cm DEEP WALL HOOD							
ICBPW302718		•	•	•	•	•	•
ICBPW362718 ICBPW422718		•	•	•	•	•	•
ICBPW482718		•	•	•	•	•	•
ICBPW602718		•	•	•	•	•	•

Sub-Zero, Sub-Zero & Design, Sub-Zero & Snowflake Design, Dual Refrigeration, The Living Kitchen, Great American Kitchens The Fine Art of Kitchen Design, Wolf, Wolf & Design, Wolf Gourmet, W & Design, red colored knobs, Cove, and Cove & Design are registered trademarks and service marks of Sub-Zero Group, Inc. and its subsidiaries. All other trademarks are property of their respective owners in the United States and other countries.

Wolf Appliance International Limited Warranty

FOR RESIDENTIAL USE

FULL TWO YEAR WARRANTY*

For two years from the date of original installation, this Wolf Appliance product warranty covers all parts and labor to repair or replace, under normal residential use, any part of the product that proves to be defective in materials or workmanship. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

LIMITED THIRD THROUGH FIFTH YEAR WARRANTY

For five years from the date of original installation, Wolf Appliance will repair or replace the following parts that prove to be defective in materials or workmanship: gas burners (excluding appearance), electric heating elements, blower motors (ventilation hoods), electronic control boards, magnetron tubes and induction generators. The part(s) will be repaired or replaced, free of charge, with the owner paying for all other costs including labor. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

For more information regarding your Wolf product warranty, contact your authorized Wolf dealer. Warranties must comply to all country, state, city, local and or ordinance.

*Stainless steel (doors, panels, handles, product frames and interior surfaces) are covered by a limited 60-day parts and labor warranty for cosmetic defects.



Wolf Appliance International Outdoor Limited Warranty*

FOR RESIDENTIAL USE

FULL ONE YEAR WARRANTY**

For one year from the date of original installation, this Wolf Appliance product warranty covers all parts and labor to repair or replace, under normal residential use, any part of the product that proves to be defective in materials or workmanship. All service provided by Wolf Appliance under the above warranty must be performed by Wolf factory certified service, unless otherwise specified by Wolf Appliance, Inc. Service will be provided during normal business hours.

LIMITED FIVE YEAR WARRANTY

For five years from the date of original installation, Wolf Appliance will repair or replace the following parts that prove to be defective in materials or workmanship: stainless steel briquette trays, gas valves, drip pans, electronic control boards and electric heating elements. If the owner uses Wolf factory certified service, the service provider will repair or replace these parts with the owner paying for all other costs, including labor. If the owner uses non-certified service, the owner must contact Wolf Appliance, Inc. (using the information below) to receive repaired or replacement parts. Wolf Appliance will not reimburse the owner for parts purchased from non-certified service or other sources.

For more information regarding your Wolf product warranty, contact your authorized Wolf dealer. Warranties must comply to all country, state, city, local and or ordinance.

*Product must be approved for outdoor use, designated by model and serial number.

**Stainless steel (doors, panels, handles, product frames and interior surfaces) are covered by a limited 60-day parts and labor warranty for cosmetic defects.





WOLFAPPLIANCE.COM